



AnySQL Maestro

User's guide

Table of Contents

| | |
|--|-----------|
| Foreword | 0 |
| I Welcome to AnySQL Maestro! | 1 |
| 1 About AnySQL Maestro | 2 |
| 2 System Requirements | 3 |
| 3 Installation | 4 |
| 4 How can I purchase AnySQL Maestro? | 5 |
| 5 License Agreement | 6 |
| 6 About SQL Maestro Group | 8 |
| 7 What's new | 11 |
| II Getting Started | 12 |
| 1 Connect to a database | 13 |
| 2 Connection parameters | 14 |
| 3 Explaining user interface | 15 |
| First time started | 16 |
| Tabbed MDI | 17 |
| Switching between windows | 19 |
| 4 Shortcut keys | 20 |
| III Databases and Database Profiles | 21 |
| 1 Creating Database Profiles | 23 |
| Setting connection properties | 23 |
| Setting profile options | 23 |
| 2 Editing Database Profile | 25 |
| Editing connection properties | 25 |
| Setting profile options | 26 |
| Setting default directories | 27 |
| Editing obligatory scripts to execute | 28 |
| Setting log options | 29 |
| Statistics | 30 |
| 3 Database Editor | 32 |
| IV Database Object Management | 33 |
| 1 Create Objects | 34 |
| Create Database Object Dialog | 34 |
| Overview of Create Objects Wizards | 34 |
| Setting object name | 35 |
| Viewing common information | 36 |
| 2 Edit Objects | 37 |
| Overview of Object Editors | 37 |
| SQL Definition | 37 |
| Describe Objects | 38 |

| | |
|--|-----------|
| 3 Duplicate Objects | 39 |
| Duplicate Object Wizard | 39 |
| Selecting source and destination databases | 39 |
| Selecting object to duplicate | 40 |
| Modifying new object definition | 41 |
| Duplicate Selected Object | 41 |
| Copy, Paste and Drag-n-Drop features | 42 |
| 4 Browse Objects | 44 |
| Database Explorer | 44 |
| Filtering explorer content | 46 |
| Object Browser | 47 |
| Object Manager | 49 |
| Filter Builder Dialog | 50 |

V Database Objects 52

| | |
|--------------------------------|-----------|
| 1 Schemas | 53 |
| Create Schema Wizard | 54 |
| Schema Editor | 56 |
| 2 Tables | 58 |
| Create Table Wizard | 59 |
| Table Editor | 60 |
| Editing table properties | 60 |
| Managing table data | 61 |
| Fields | 64 |
| Indexes | 66 |
| Foreign Keys | 68 |
| Foreign Key References | 70 |
| 3 Views | 73 |
| Create View Wizard | 74 |
| View Editor | 78 |
| Editing view properties | 79 |
| Viewing data | 80 |

VI Queries 81

| | |
|-------------------------------------|-----------|
| 1 SQL Editor | 83 |
| SQL Formatter | 84 |
| Executing query | 85 |
| Query Parameters | 87 |
| 2 Visual Query Builder | 88 |
| Creating query diagram | 89 |
| Working with editor area | 94 |
| Executing query | 95 |

VII Data Management 97

| | |
|-------------------------------|------------|
| 1 Data View | 98 |
| Working with data grid | 99 |
| Working with info cards | 104 |
| Data input form | 105 |
| Data filtering | 106 |
| 2 BLOB Editor | 109 |

| | |
|--|------------|
| Editing as image | 109 |
| Editing as hexadecimal dump | 110 |
| Editing as plain text | 110 |
| Editing as HTML | 111 |
| Editing as PDF document | 112 |
| 3 Export Data Wizard | 114 |
| Setting destination file name and format | 114 |
| Setting header and footer | 115 |
| Selecting fields for export | 116 |
| Adjusting data formats | 116 |
| Setting format-specific options | 117 |
| Setting common export options | 120 |
| 4 Get SQL Dump | 121 |
| Selecting fields | 121 |
| Specifying dump options | 122 |
| 5 Import Data Wizard | 124 |
| Setting source file name and format | 125 |
| Setting the accordance between source and target columns | 127 |
| Map builder | 128 |
| Data formats | 129 |
| Customizing common options | 130 |

VIII Database Tools 131

| | |
|---|------------|
| 1 Script Runner | 132 |
| 2 SQL Script Editor | 133 |
| 3 Generate Database Report | 135 |
| Selecting reporting elements and setting other report options | 135 |
| Reporting objects and editing styles options | 135 |
| Editing database report style | 136 |
| 4 BLOB Viewer | 137 |
| Viewing as hexadecimal dump | 137 |
| Viewing as plain text | 138 |
| Viewing as image | 139 |
| Viewing as HTML | 140 |
| Viewing as PDF | 141 |
| 5 Diagram Viewer | 143 |
| Customizing diagram properties | 144 |
| Exporting diagram image | 145 |
| 6 Data Analysis | 147 |
| Input SELECT query | 148 |
| Managing report data | 149 |
| 7 Report Designer | 152 |
| Designer Tools and Objects | 154 |
| Object Inspector | 156 |
| 8 Schema Designer | 159 |
| Designer Navigation Bar | 161 |
| Schema Designer Toolbox | 161 |
| 9 SQL Generator | 164 |
| 10 Generation of updatable views | 165 |

| | |
|---|------------|
| 11 Split table | 166 |
| 12 Nullable Column Checker | 168 |
| 13 Dialogs | 170 |
| Find Text dialog | 170 |
| Replace Text dialog | 171 |

IX Options 174

| | |
|--------------------------------------|------------|
| 1 Application | 175 |
| Preferences | 175 |
| Confirmations | 176 |
| Directories | 178 |
| Tools | 178 |
| Explorer | 180 |
| Object Manager | 181 |
| SQL Editor | 181 |
| SQL Script Editor | 182 |
| Query Builder | 183 |
| Colors | 185 |
| BLOB Viewer | 185 |
| Data Export | 186 |
| Database Designer | 187 |
| Object Editors | 188 |
| Table | 190 |
| Data Grid | 190 |
| Options | 191 |
| Colors | 193 |
| Formats | 193 |
| Filter | 195 |
| 2 Editors & Viewers | 197 |
| General | 197 |
| Display | 198 |
| SQL highlight | 199 |
| XML highlight | 200 |
| PHP highlight | 201 |
| Code Insight | 202 |
| Code Folding | 203 |
| 3 Appearance | 205 |
| Bars and menus | 205 |
| Trees and lists | 206 |
| Edit controls | 207 |
| Check boxes | 208 |
| Buttons | 209 |
| Page controls | 210 |
| Group boxes | 211 |
| Splitters | 212 |
| 4 Export Settings | 214 |
| Specifying destination file | 214 |
| Selecting setting categories | 214 |
| Selecting database profiles | 215 |
| Saving settings | 215 |

Index

217

1 Welcome to AnySQL Maestro!

AnySQL Maestro is a tool for administering of any database engine (SQL Server, Oracle, MySQL, MS Access, etc.) which is accessible via ODBC driver or OLE DB provider. The software was designed for database administrators, developers and others who work with several database servers.

This help is designed both as a course in using AnySQL Maestro and as a reference while you are working with the program.

- ❑ Study [Getting Started](#)^[12] section for details on using this help and getting more information.
- ❑ Use [Overview of Database Object Management](#)^[33] sections to familiarize yourself with the program.
- ❑ See [Database Tools](#)^[13] and [Queries](#)^[81] sections for instructions on more advanced procedures!
- ❑ Find out more about [Working with Data in AnySQL Maestro](#)^[97].
- ❑ Customize the way AnySQL Maestro works, see [Program Options](#)^[174] for full details.

The topics in this section provide some basic information about AnySQL Maestro, what it is for and what you can do with it.

- [About AnySQL Maestro](#)^[2]
- [Installation of the software](#)^[4]
- [How can I purchase my AnySQL Maestro](#)^[5]?
- [License Agreement](#)^[6]
- [System Requirements](#)^[3]
- [About SQL Maestro Group](#)^[8]

1.1 About AnySQL Maestro

AnySQL Maestro is the multi-purpose admin tool for database management, control and development. Key features include:

- Support of any database engine (SQL Server, MySQL, Access, etc.)
- Schema Designer: an easy and powerful way to manage your database.
- Advanced data management: editing, grouping, sorting and filtering abilities, master-detail views, and lookup editors.
- Handy SQL Editor with code folding, syntax highlighting, SQL formatter and multi-threading.
- Visual Query Builder with support of SELECT, INSERT, UPDATE and DELETE queries, subqueries and UNIONS.
- Data export/import modules to/from the most popular formats including Excel, HTML, XML, and more.
- Powerful BLOB Viewer/Editor

The application also provides you with a powerful set of tools to edit and execute SQL scripts, build visual diagrams for numeric data, compose OLAP cubes, and much more.

The software is offered in two editions: **Freeware** and **Professional**. Freeware version has several capabilities disabled. To find out the difference, use the corresponding [comparison table](#).

To work with a database, first of all you need to have a corresponding ODBC driver/OLE DB provider installed on your PC. You can find a lot of information that is good to know about when working with connection strings at <http://www.connectionstrings.com>. To get a specialized tool that does not require any additional drivers, visit our [Products](#) ⁸⁴ list.

1.2 System Requirements

Client environment

- Pentium PC or higher;
- Windows NT4/2000/XP/Vista/Windows 7/Windows 8/Windows 10/Windows 11;
- 512 MB RAM (1 GB recommended);
- 25 MB of free hard disk space;
- SVGA-compatible video adapter.

Server environment

- ODBC driver or OLE DB provider corresponding to your database.

1.3 Installation

To install **AnySQL Maestro** for the first time on your PC:

- download the AnySQL Maestro distribution package from the [download page](#) at our site;
- run setup.exe from the local folder and follow the instructions of the installation wizard;
- find the AnySQL Maestro shortcut in the corresponding program group of the Windows Start menu after the installation is completed.

To upgrade the installed copy of AnySQL Maestro to the latest version:

- download the AnySQL Maestro executable file from the [download page](#) at our site;
- unzip downloaded file to any local folder, e.g. *c:\unzipped*;
- exit from AnySQL Maestro if it is running;
- replace previous version of AnySQL Maestro by copying unzipped files to the AnySQL Maestro folder;
- run AnySQL Maestro using its shortcut in the Windows Start menu.

You can also use the full distribution package to upgrade your current version of AnySQL Maestro. In this case you should repeat the steps of the first-time installation. Note that the full distribution package is larger than a single executable file.

1.4 How can I purchase AnySQL Maestro?

Thank you for your interest in purchasing **AnySQL Maestro Professional!**

You can select licensing options and register AnySQL Maestro at its [on-line order page](#). It is possible to purchase on-line, by fax, mail, toll-free phone call, or place a purchase order. We send the software activation key by email within 24 hours after completion of the order process. If you have not received the activation key within this period, please contact our [sales department](#).

All our products and bundles are shipped with 12 months of free upgrades (minor and major ones) or with 36 months of free upgrades for a quite small additional fee. After this period you may renew your license for the next 12(36) months with a 50% discount.

AnySQL Maestro has a free 30-day trial. Upon purchasing the product you confirm that you have tested it and you are completely satisfied with its current version.

To obtain technical support, please visit the [appropriate section](#) on our website or contact us by email to support@sqlmaestro.com.

1.5 License Agreement

Notice to users: carefully read the following legal agreement. The use of the software provided with this agreement (the "SOFTWARE") constitutes your acceptance of these terms. If you do not agree to the terms of this agreement, do not install and/or use this software. The use of this software is conditioned upon the user's compliance with the terms of this agreement.

- **License grant.** SQL Maestro Group grants you a license to use one copy of the version of this SOFTWARE on any single hardware product for as many licenses as you purchase. "You" means a company, an entity or an individual. "Use" means storing, loading, installing, executing or displaying the SOFTWARE. You may not modify the SOFTWARE or disable any licensing or control features of the SOFTWARE except as an intended part of the SOFTWARE's programming features. This license is not transferable to any other company, entity or individual. You may not publish any registration information (serial numbers, registration keys, etc.) or pass it to any other company, entity or individual.
- **Ownership.** The SOFTWARE is owned and copyrighted by [SQL Maestro Group](#). Your license confers no title or ownership of the SOFTWARE and should not be construed as a sale of any rights for the SOFTWARE.
- **Copyright.** The SOFTWARE is protected by the United States copyright law and international treaty provisions. You acknowledge that no title to the intellectual property in the SOFTWARE is transferred to you. You further acknowledge that title and full ownership rights to the SOFTWARE will remain the exclusive property of [SQL Maestro Group](#) and you will not acquire any rights to the SOFTWARE except as expressly set forth in this license. You agree that any copies of the SOFTWARE will contain the same proprietary notices which appear on and in the SOFTWARE.
- **License and distribution.** An unregistered copy of the SOFTWARE ("UNREGISTERED SOFTWARE") may be used for evaluation purposes. The UNREGISTERED SOFTWARE may be freely copied and distributed to other users for their evaluation. If you offer this UNREGISTERED SOFTWARE installation package for download, then you agree to:
 - replace existing version of the UNREGISTERED SOFTWARE installation package with the new package immediately after a new version of the SOFTWARE is released by SQL Maestro Group, or
 - delete an obsolete version of the UNREGISTERED SOFTWARE installation package immediately upon written email notice by SQL Maestro Group.

A registered copy of the SOFTWARE ("REGISTERED SOFTWARE") allows you to use the SOFTWARE only on a single computer and only by a single user at a time. If you wish to use the SOFTWARE for more than one user, you will need a separate license for each individual user. You are allowed to make one copy of the REGISTERED SOFTWARE for back-up purposes.

- **Reverse engineering.** You affirm that you will not attempt to reverse compile, modify, translate, or disassemble the SOFTWARE in whole or in part.
- **Unauthorized use.** You may not use, copy, rent, lease, sell, modify, decompile, disassemble, otherwise reverse engineer, or transfer the SOFTWARE except as provided in this agreement. Any such unauthorized use shall result in immediate and

automatic termination of this license.

- **No other warranties.** [SQL Maestro Group](#) does not warrant that the SOFTWARE is error-free. SQL Maestro Group disclaims all other warranties with respect to the SOFTWARE, either express or implied, including but not limited to implied warranties of merchantability, fitness for a particular purpose and noninfringement of third party rights. Some jurisdictions do not allow the exclusion of implied warranties or limitations on how long an implied warranty may last, or the exclusion or limitation of incidental or consequential damages, so the above given limitations or exclusions may not apply to you. This warranty gives you specific legal rights and you may also have other rights which vary from jurisdiction to jurisdiction.
- **Limited warranty.** This SOFTWARE is provided on an "AS IS" basis. [SQL Maestro Group](#) disclaims all warranties relating to this SOFTWARE, whether expressed or implied, including but not limited to any implied warranties of merchantability or fitness for a particular purpose. Neither SQL Maestro Group nor anyone else who has been involved in the creation, production, or delivery of this SOFTWARE shall be liable for any indirect, consequential, or incidental damages arising out of the use or inability to use such SOFTWARE, even if SQL Maestro Group has been advised of the possibility of such damages or claims. The person using the SOFTWARE bears all risk as to the quality and performance of the SOFTWARE.

Some jurisdictions do not allow limitation or exclusion of incidental or consequential damages, so the above given limitations or exclusion may not apply to you to the extent that liability is by law incapable of exclusion or restriction.

- **Severability.** In the event of invalidity of any provision of this license, the parties agree that such invalidity shall not affect the validity of the remaining portions of this license.
- **No liability for consequential damages.** In no event shall [SQL Maestro Group](#) or its suppliers be liable to you for any consequential, special, incidental or indirect damages of any kind arising out of the delivery, performance or use of the SOFTWARE, even if SQL Maestro Group has been advised of the possibility of such damages. In no event will SQL Maestro Group's liability for any claim, whether in contract, tort or any other theory of liability, exceed the license fee paid by you, if any.
- **Entire agreement.** This is the entire agreement between you and [SQL Maestro Group](#) which supersedes any prior agreement or understanding, whether written or oral, relating to the subject matter of this license.
- **Reserved rights.** All rights not expressly granted here are reserved to [SQL Maestro Group](#).

1.6 About SQL Maestro Group

SQL Maestro Group is a privately-held company producing high-quality software for database administrators and developers. The united team of eminently qualified developers is pleased to create new software products for commercial, academic and government customers worldwide. We do our best to design and develop products that remove complexity, improve productivity, compress time frames, and increase database performance and availability. We are glad to realize that our products take usual chores upon themselves, so that our customers could have more time left for their creative work.

The company was founded in 2002 as an essential partner for every business that is trying to harness the explosive growth in corporate data. SQL Maestro Group employs an international team concentrating their efforts on cutting-edge DBA tools development.


The slogan of our company is **The Shortest Path to SQL**. It is aimed to denote that we set to create easy-to-use products meant for those who appreciate comfort, friendly program interface and support when working with SQL servers.

- We are pleased to facilitate your job.
- We aim at being of considerable assistance to our clients.
- We feel contented doing our beloved work.

At present, our company offers a series of Windows GUI admin tools for SQL management, control and development of the following servers: **MySQL, Microsoft SQL Server, PostgreSQL, Oracle, SQL Anywhere, DB2, SQLite, Firebird, and MaxDB**. We also produce universal tools to be used for administering any database engine accessible via ODBC driver or OLE DB provider. Such products may be the clear-cut decision for those who constantly work with several database servers.

SQL Maestro is the premier Windows GUI admin tool for database development, management, and control.

It provides you with the ability to perform all the necessary database operations such as creating, editing, copying, extracting and dropping database objects; moreover, you can build queries visually, execute queries and SQL scripts, view and edit data including BLOBs, represent data as diagrams, export and import data to/from most popular file formats, manage users and their privileges (if possible), and use a lot of other tools designed for making your work with your server comfortable and efficient.

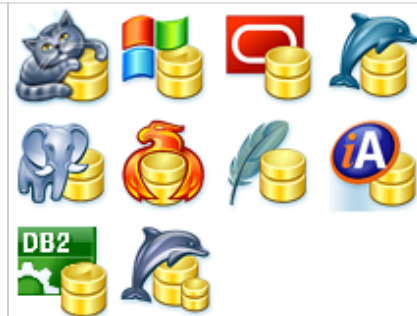

SQL PHP Generator is a powerful tool for creating database-driven web applications visually. It allows you to generate high-quality PHP scripts for working with tables, views and queries through the web. You needn't have any programming background to use it.



SQL Data Wizard is a high-capacity Windows GUI utility for managing your data.

It provides you with a number of easy-to-use wizards for performing the required data manipulation easily and quickly. The tool allows you to export data from database tables and queries to most popular formats, import data into the tables, generate SQL dump of selected tables, and export/import BLOB fields from/to files.



SQL Code Factory is a premier GUI tool aimed at the SQL queries and scripts development.

It allows you to manage SQL queries and scripts using such useful features as code folding, code completion and syntax highlighting, build query visually, execute several queries at a time, execute scripts from files, view and edit result data with filtering, sorting and grouping abilities, export data to as many as 14 file formats including Excel, RTF and HTML, import data from Excel, CSV, XML and text files, view and edit BLOBs in various way, build diagrams based on Oracle data, and much more.




Database Converter is a user friendly tool to migrate any local or remote ADO-compatible database to database.

Such tools transfer database schema and data and are equipped with native support for the most popular database servers.



Data Sync is a powerful and easy-to-use tool for database contents comparison and synchronization.

Such tools can be useful for database administrators, developers and testers that need a quick, easy and reliable way to compare and synchronize their data.

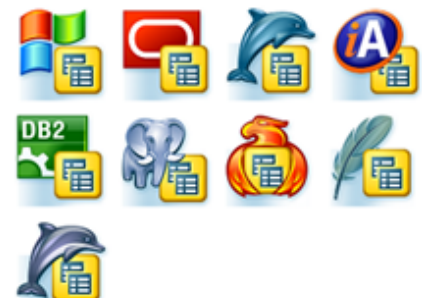

The software products are constantly optimized for the latest server versions support.

You can use the following contact information if necessary:

Our web-site www.sqlmaestro.com

Postal address: **SQL Maestro Group**
140 Broadway, Suite 706
New York City, New York 10005
United States

Thank you for your interest to our company!

1.7 What's new

Please find out the latest AnySQL Maestro news at <http://www.sqlmaestro.com/products/anysql/maestro/news/>

2 Getting Started

The topics in this section provide some basic information about AnySQL Maestro, what it is for and what you can do with it.

How to get started:

- [Connect to a database with AnySQL Maestro](#)^[13]
- [Explaining user interface](#)^[15]
- [How AnySQL Maestro looks when you start it for the first time](#)^[16]
- [Shortcut keys](#)^[20]

Learning more:

- ❑ Study the [Overview of Database Object Management](#)^[33] section for detailed instructions on using AnySQL Maestro.
- ❑ See [Database Tools](#)^[131] and [Queries](#)^[81] sections for instructions on more advanced procedures!
- ❑ Find out more about [Working with Data in AnySQL Maestro](#)^[97].
- ❑ Customize the way AnySQL Maestro works, see [Program Options](#)^[174] for full details.

2.1 Connect to a database

To manage an existing database with AnySQL Maestro, you have to [create the according database profile](#)^[23] first. A profile stores database connection settings, and some additional options to customize the way the software works with the database. After the creation database profiles appear as nodes in the Explorer tree on the left (profile properties can be later changed with [Database Profile Editor](#)^[25]).

When the profile is created you can connect to the database. To do so, select the database in the [Explorer tree](#)^[44], or either select the [Database | Connect to Database](#) main menu item or use the [Connect to Database](#) item of the popup menu. You can also double click the database node in the explorer tree. If connection succeeds, the database node expands displaying the tree of database objects (tables, views, procedures, etc). The database becomes ready for your activities.

How can I disconnect from a database?

In order to disconnect from a database you should first select the database in the explorer tree, then either

- select the [Database | Disconnect from Database](#) main menu item
- or
- use the [Disconnect from Database](#) item of the popup menu.

See also: [Connection parameters](#)^[14]


2.2 Connection parameters

AnySQL Maestro connects to a database via OLE DB provider or ODBC driver. The [Connection string](#) contains the information that the provider needs to know to be able to establish a connection to the database or the data file. You can find a lot of information that is good to know about when working with connection strings at <http://www.connectionstrings.com>.

2.3 Explaining user interface

The SQL Maestro Group products are famous for their clear and intuitive user interface. The programs are built around the three-pane workspace that includes the [database explorer](#) and child windows consisting of the [navigation bar](#) and [work area](#).

This topic provides a brief guide to the components of AnySQL Maestro's user interface. For detailed descriptions, see below.

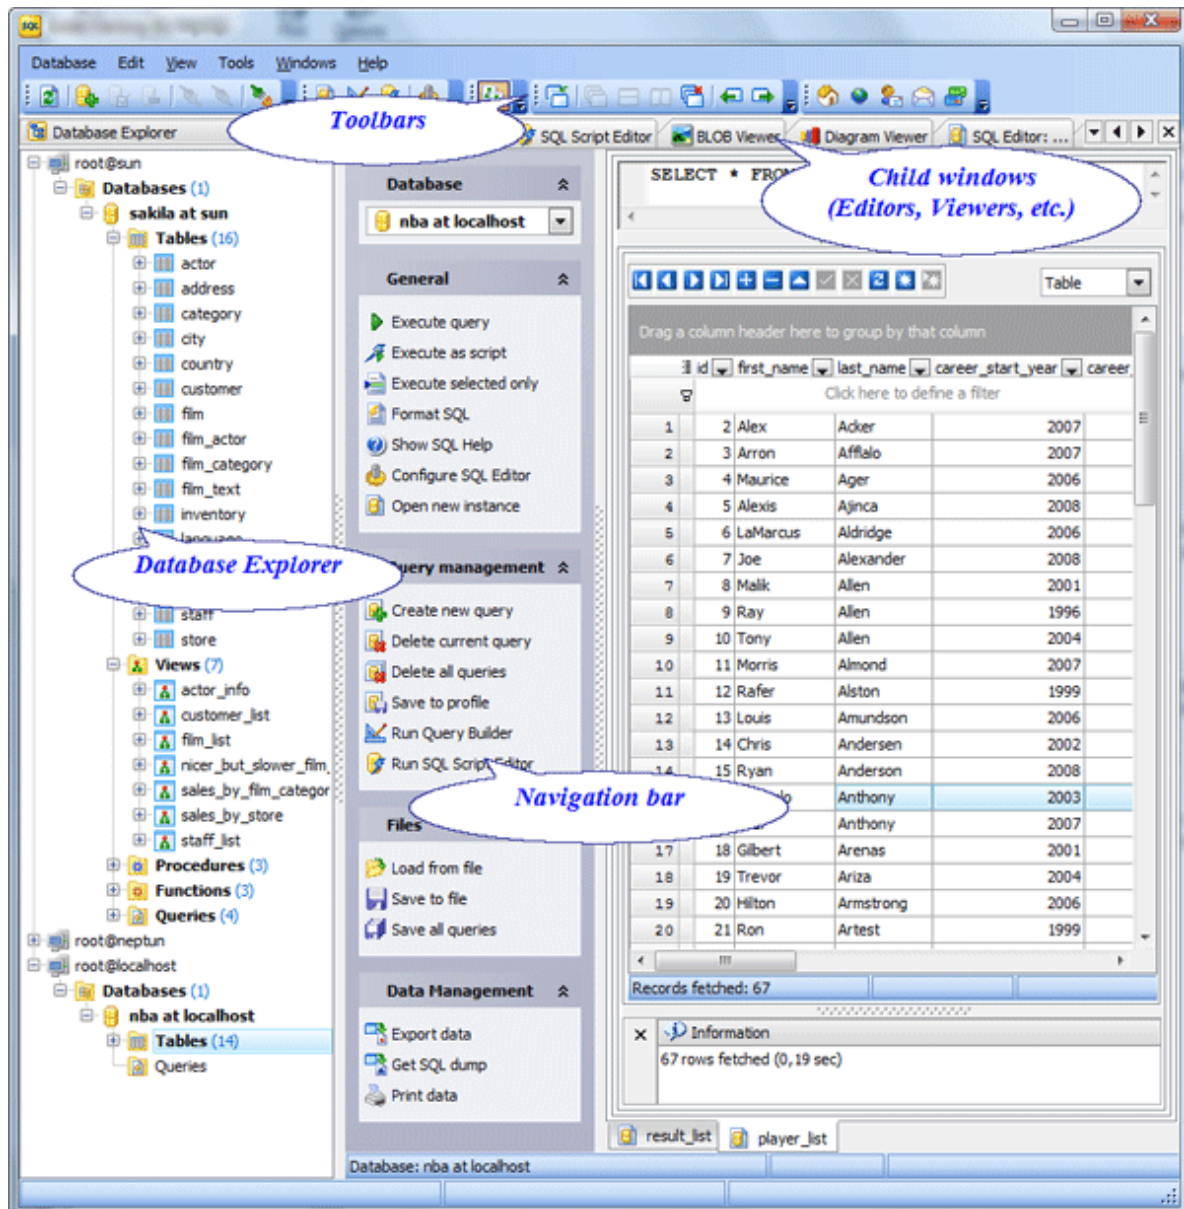

Database Explorer

The [Database Explorer](#)^[44] occupies the left side of AnySQL Maestro main window. It represents all the connected databases objects [including system objects](#)^[26].

The explorer provides the fastest way to reach the object properties, to perform the following operations with database profiles using the popup menu:

- create new objects (database profiles, database objects, table objects...);
- edit currently selected objects;
- remove currently selected objects from the explorer tree;
- duplicate objects;
- rename objects if available and edit object comments out of the object editor.

See also: [Filtering explorer content](#)^[46]

Editors and Viewers

According to the MDI style implementation the AnySQL Maestro tools and editors are opened in appropriate windows. Each window consists of a navigation bar and work area. The software supports Classic and Tabbed MDI.

See also: [Switching between windows](#)^[19], [Tabbed MDI](#)^[17]

Navigation bar

The [Navigation Bar](#) contains a set of logically grouped links provided to realize the corresponding actions. Just position the mouse over a link and wait for a second to display the appropriate action shortcut making it possible for experienced users to control the program almost entirely with the keyboard.

See also: [Shortcut keys](#)^[20]


Toolbars

The bars occupy the top of the main window. The [Toolbars](#) provide quick access to the most frequently-used functions. Just position the mouse over a tool and wait for a second to display a brief text describing what it is for.

2.3.1 First time started

This is how AnySQL Maestro looks when you run it for the first time. The [Connect to database](#) link allows you to start working with existing databases. Follow the link to open [Create database profile](#)^[23]

The window provides you with quick access to the [Create Database Object](#)^[34] dialog, [Schema Designer](#)^[159], [SQL Editor](#)^[83], and [SQL Script Editor](#)^[133] recently used database profiles. At the bottom of the page the latest company news and current discount programs are represented.

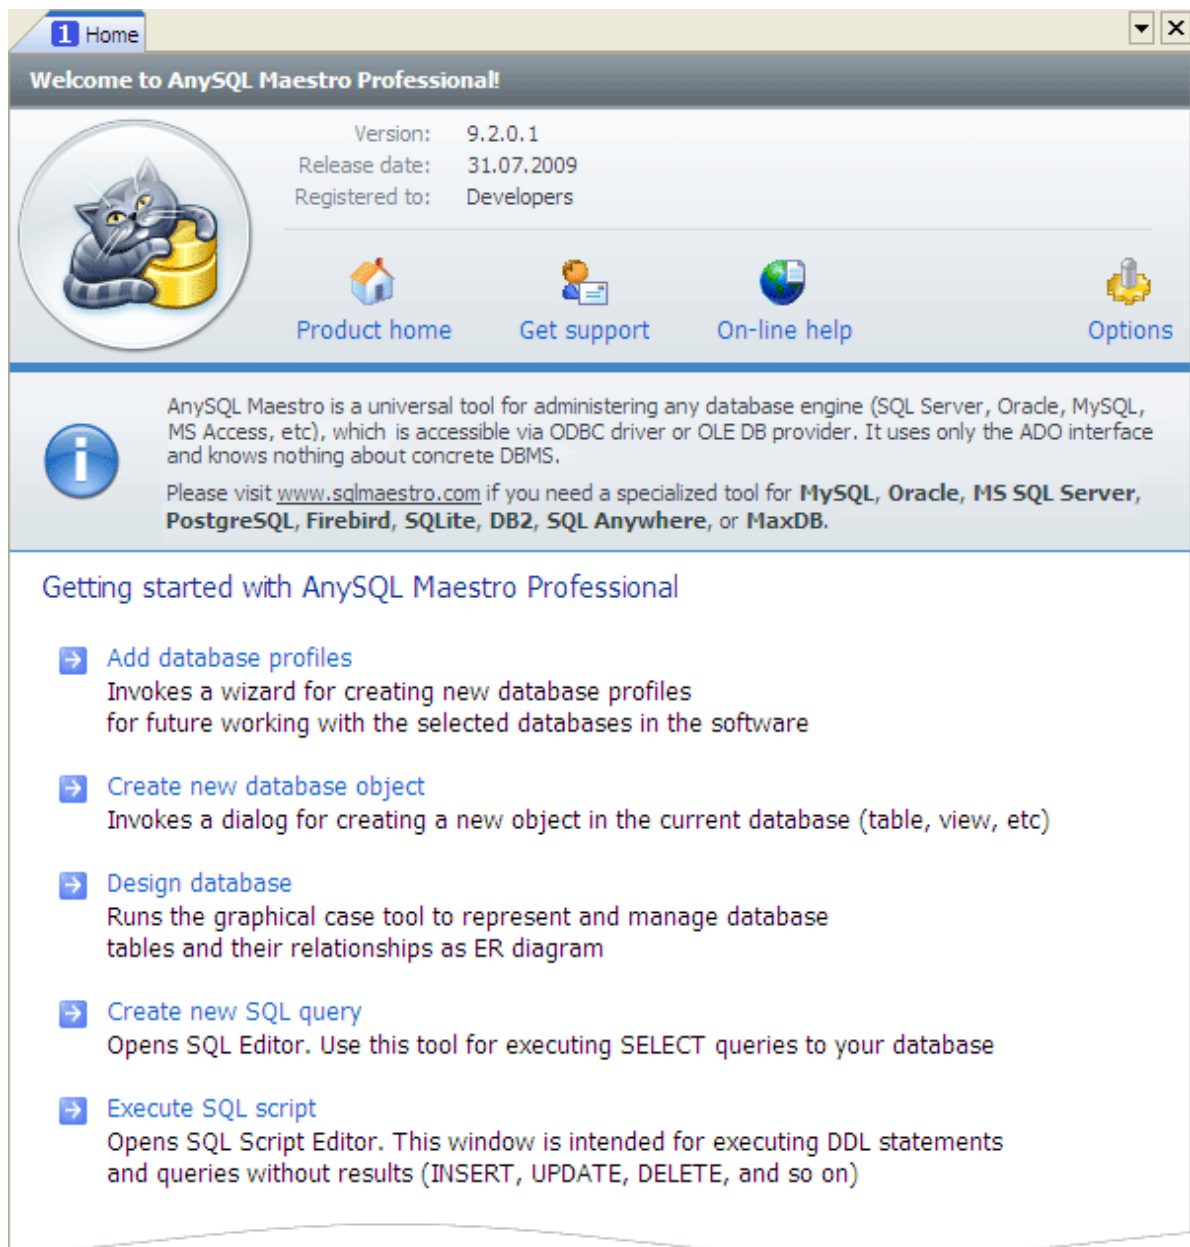

2.3.2 Tabbed MDI

AnySQL Maestro provides you with a possibility to choose ([Options|Application](#)) your favorite UI. Among the **classic MDI style** the **tabbed MDI style** is also available.

Applying the style you'll get all the objects editors opening on separate sheets. You can move from one sheet to another by clicking the sheet tabs at the bottom of the working area. The tab for the active sheet is underlined in the color you choose; tabs for inactive sheets are fully colored.

You can switch between the sheets with corresponding sheet tabs or using **Ctrl+Tab**. If you don't see the tool you want, click the tab scrolling buttons to display the tab, and then click the tab. You can also move the sheets.

The screenshot displays the AnySQL Maestro application window. The top toolbar includes tabs for SQL Editor, SQL Script Editor, BLOB Viewer, Diagram Viewer, and another SQL Editor. The left sidebar contains several expandable sections:

- Database:** A dropdown menu showing 'nba at localhost'.
- General:** Contains icons for 'Execute query', 'Execute as script', 'Execute selected only', 'Format SQL', 'Show SQL Help', 'Configure SQL Editor', and 'Open new instance'.
- Query management:** Contains icons for 'Create new query', 'Delete current query', 'Delete all queries', 'Save to profile', 'Run Query Builder', and 'Run SQL Script Editor'.
- Files:** Contains icons for 'Load from file', 'Save to file', and 'Save all queries'.
- Data Management:** Contains icons for 'Export data', 'Get SQL dump', and 'Print data'.

The main window area shows the SQL query editor with the text: `SELECT * FROM player;`. Below the editor is a toolbar with various navigation and execution icons. The results are displayed in a table view. The table has columns: `id`, `first_name`, `last_name`, `career_start_year`, and `career`. The first 22 rows are visible, with row 15 (Carmelo Anthony) selected. Below the table, a status bar indicates 'Records fetched: 67'. At the bottom, a status bar shows 'Database: nba at localhost'.

| | id | first_name | last_name | career_start_year | career |
|----|----|------------|-----------|-------------------|--------|
| 1 | 2 | Alex | Acker | 2007 | |
| 2 | 3 | Arron | Afflalo | 2007 | |
| 3 | 4 | Maurice | Ager | 2006 | |
| 4 | 5 | Alexis | Ajinca | 2008 | |
| 5 | 6 | LaMarcus | Aldridge | 2006 | |
| 6 | 7 | Joe | Alexander | 2008 | |
| 7 | 8 | Malik | Allen | 2001 | |
| 8 | 9 | Ray | Allen | 1996 | |
| 9 | 10 | Tony | Allen | 2004 | |
| 10 | 11 | Morris | Almond | 2007 | |
| 11 | 12 | Rafer | Alston | 1999 | |
| 12 | 13 | Louis | Amundson | 2006 | |
| 13 | 14 | Chris | Andersen | 2002 | |
| 14 | 15 | Ryan | Anderson | 2008 | |
| 15 | 16 | Carmelo | Anthony | 2003 | |
| 16 | 17 | Joel | Anthony | 2007 | |
| 17 | 18 | Gilbert | Arenas | 2001 | |
| 18 | 19 | Trevor | Ariza | 2004 | |
| 19 | 20 | Hilton | Armstrong | 2006 | |
| 20 | 21 | Ron | Artest | 1999 | |
| 21 | 22 | Darrell | Arthur | 2008 | |

Records fetched: 67

Information
67 rows fetched (0,19 sec)


result_list player_list

Database: nba at localhost

2.3.3 Switching between windows

The [Window List](#) dialog allows you to switch the child application windows quickly. To open the dialog select the [Windows | Window List...](#) item of the main menu or use the **Alt+O** hot keys combination.




Most of the windows are linked according to their active databases and displayed in the form of a tree, e.g. [Table Editor](#), [SQL Editor](#), [Diagram Viewer](#), etc. Windows which are common for the entire program are shown as separate nodes of the tree.

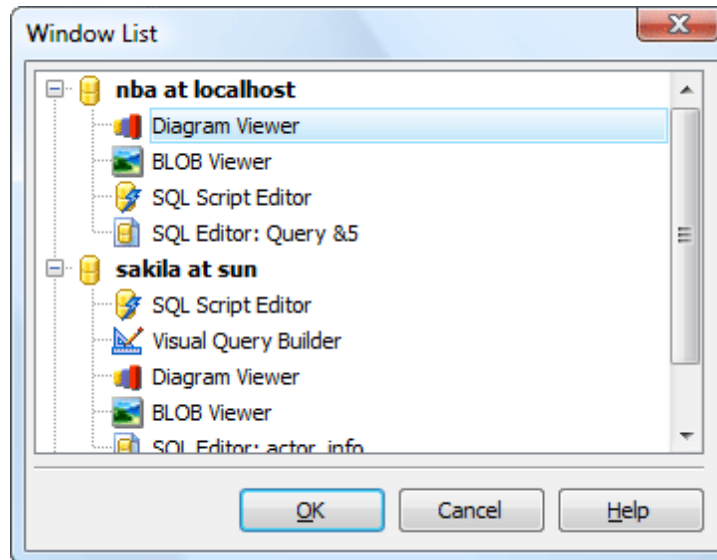

To activate the window you need, select one of the window tree items and click the **OK** button.

2.4 Shortcut keys

The following table describes the default shortcut keys in AnySQL Maestro.

| | |
|--|---------------------------------|
| Interface  | |
| Window list | Alt+O |
| Previous Window | F6 |
| Next Window | Ctrl+F6 |
| Show Database Explorer | F11 |
| Refresh | F5 |
| Exit | Alt+F4 |
| AnySQL Maestro help | F1 |
| Clipboard | |
| Cut | Ctrl+X |
| Copy | Ctrl+C |
| Paste | Ctrl+V |
| Select all | Ctrl+A |
| Find | Ctrl+F |
| Replace | Ctrl+H |
| Search again | F3 |
| Undo | Ctrl+Z |
| Redo | Shift+Ctrl+Z |
| SQL Editors  | |
| Open SQL Editor | Ctrl+E |
| Open SQL Script Editor | Ctrl+R |
| Open Visual Query Builder | Ctrl+Q |
| Execute query | (F9) or (F8) |
| Execute query as script | (Shift+F9) or (Shift+F8) |
| Execute selected only | (Alt+F9) or (Alt +F8) |
| Go to line | Ctrl+G |
| Format selected SQL | Ctrl+Alt+F |
| Create new query | Ctrl+N |
| Delete current query | Ctrl+Alt+D |
| Load script from file | Ctrl+O |
| Database management  | |
| Create a new database profile | Shift+Ctrl+P |
| Edit an existing database profile | Shift+Ctrl+E |
| Rename a database profile (object) | F2 |
| Remove database profile | Shift+Ctrl+R |
| Connect to the database | Shift+Ctrl+C |
| Disconnect from the database | Shift+Ctrl+D |
| Create a database object | Shift+Ctrl+N |
| Object Browser | Shift+Ctrl+O |
| Open BLOB Viewer | Ctrl+B |

3 Databases and Database Profiles

AnySQL Maestro allows you to manipulate databases by means of database profiles. Profile contains database connection settings and a set of options to automatize common manipulations with databases (a possibility to connect to the database at AnySQL Maestro startup, login prompt before connection, etc.). To start working with databases in AnySQL Maestro, you should create database profile(s) first.

Use the following links for details:

■ **How can I create new database profiles?**

In AnySQL Maestro database profiles are created within [Create Database Profiles Wizard](#)^[23]. In order to run the wizard you should either

- select the [Database | Create Database Profiles...](#) main menu item
- or
- use the [Create Database Profiles...](#) item of the popup menu.

Using [Create Database Profiles Wizard](#) set the necessary connection and authorization options and click the [Ready](#) button to complete the operation.

■ **How can I edit existing database profile options?**

Database connection properties and profile options are edited within the [Database Profile Properties](#)^[24] dialog window. In order to open the dialog for the selected database profile you should either

- select the [Database | Edit Database Profile...](#) main menu item
- or
- use the [Edit Database Profile...](#) item of the popup menu.

■ **How can I remove database profiles?**

In order to remove a database profile you should first select the database profile in the explorer tree, then either select the [Database | Remove Database Profile](#) main menu item, or use the [Remove Database Profile](#) item of the popup menu and confirm removing profile in the dialog window to complete the operation.

■ **How can I connect to a database?**

In order to connect to a database you should first select the database in the explorer tree, then either

- select the [Database | Connect to Database](#) main menu item

or

- use the [Connect to Database](#) item of the popup menu.

■ **How can I disconnect from a database?**

In order to disconnect from a database you should first select the database in the explorer tree, then either

- select the [Database | Disconnect from Database](#) main menu item

or

- use the [Disconnect from Database](#) item of the popup menu.

3.1 Creating Database Profiles


Create Database Profiles Wizard allows you to create a single database profile or several profiles from one host. To run the wizard, select the [Database | Create Database Profiles...](#) main menu item, or press the **Shift+Ctrl+P** hot keys combination. You can also use the [Create Database Profiles](#) button of the main toolbar.

- [Set connection properties](#)^[23]
- [Specify database profile options](#)^[23]

See also: [Edit Database Profile Dialog](#)^[25]


3.1.1 Setting connection properties

Specify database [connection properties](#)^[14] to be used on further connections.

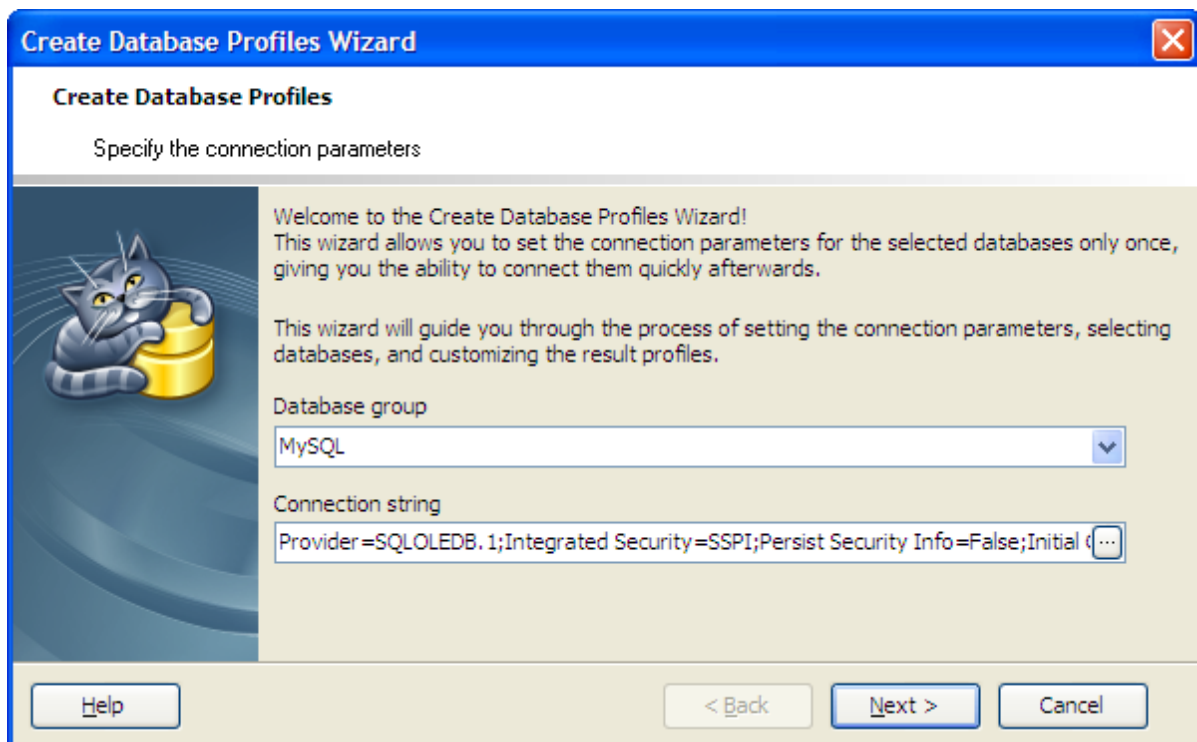

3.1.2 Setting profile options

To create a new profile,

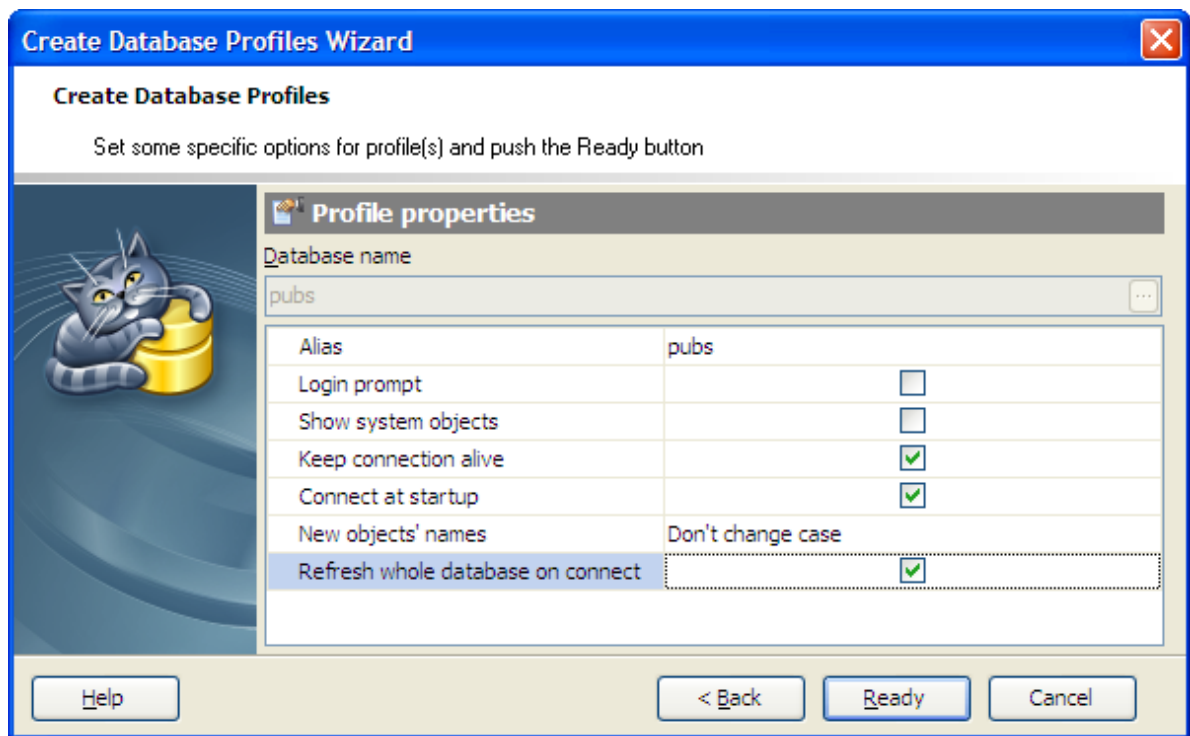

☒ [Login prompt before connection](#)

Use the option to enable AnySQL Maestro to prompt for user name and password every time you connect to the database.

☒ [Show system objects](#)

Check the box to make system objects visible.

☒ [Keep connection alive](#)

Check the box for pinging server before each query execution.

☒ [Connect at startup](#)

With this option on connection to the profile database is automatically established at the application startup.

[New objects' names \(Don't change case, Convert to upper case, Convert to lower case\)](#)

The option allows you to specify the newly created objects case.

☒ [Refresh whole database on connect](#)

Use the option along with the [Show empty schemas](#) explorer options to hide/show empty schemas in the explorer tree.

[Profile text color](#)

Select the color to be used to represent the database profile name at the Explorer tree. For example this option may be useful to mark development and production databases in different colors in order to prevent casual metadata or data changes in the production.

Click the [Ready](#) button when done to start working with the selected databases in AnySQL Maestro.

3.2 Editing Database Profile

Use the [Edit Database Profile](#) dialog to edit the profile properties set on its creation. To open the dialog, select the database in the explorer tree, then select the [Database | Edit Database Profile...](#) main menu item or press the **Shift+Ctrl+E** hot key combination. You can also use the [Edit Database Profile](#) button of the main toolbar.


Instead of manual profile options editing you can copy all the options from the another existing profile with the [Copy profile](#) button.

- [Editing database connection properties](#) ^[26]
- [Settings database options](#) ^[26]
- [Setting default directories for database tools](#) ^[27]
- [Editing obligatory scripts to execute](#) ^[28]
- [Setting log options and file names](#) ^[29]

See also: [Create Database Profile Wizard](#) ^[23]


3.2.1 Editing connection properties

The tab allows you to change [connection properties](#) ^[14] of an existing database profile. Here you can change the database group, database info and edit the database alias, an optional name to display the database in the Explorer tree and in all the application tools.

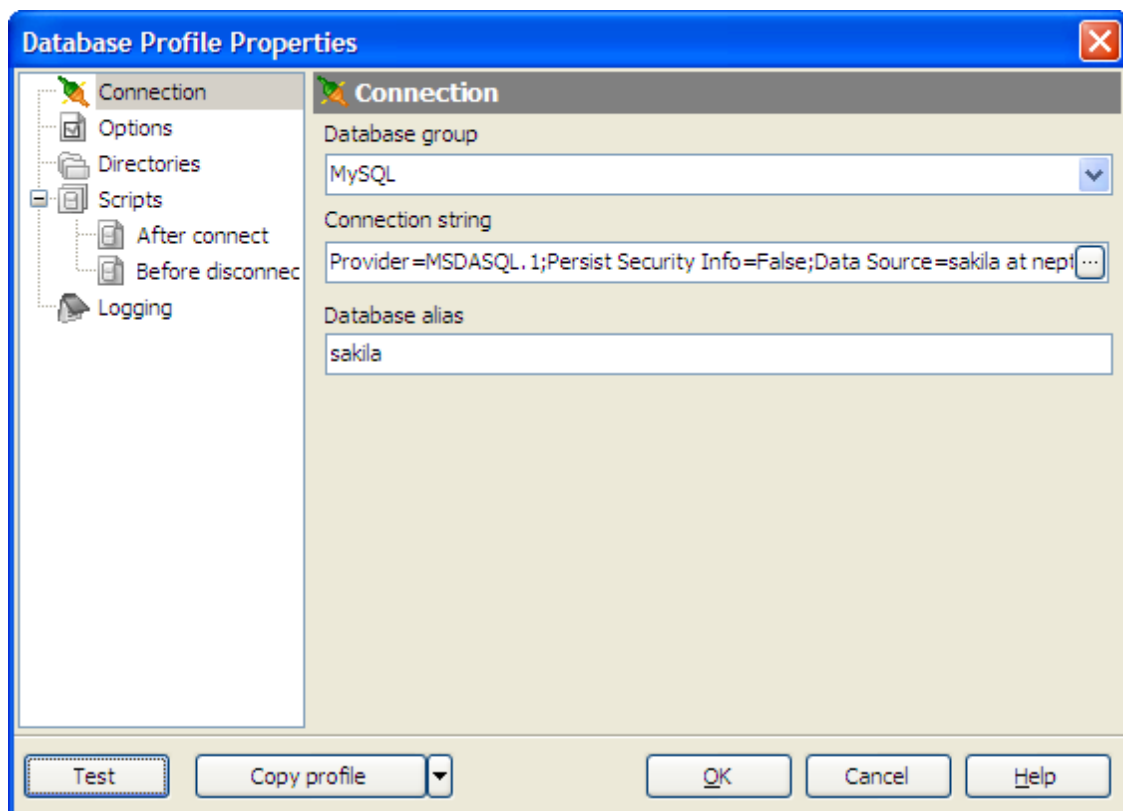

3.2.2 Setting profile options

Customize database options according to your needs. The detailed description is given below.

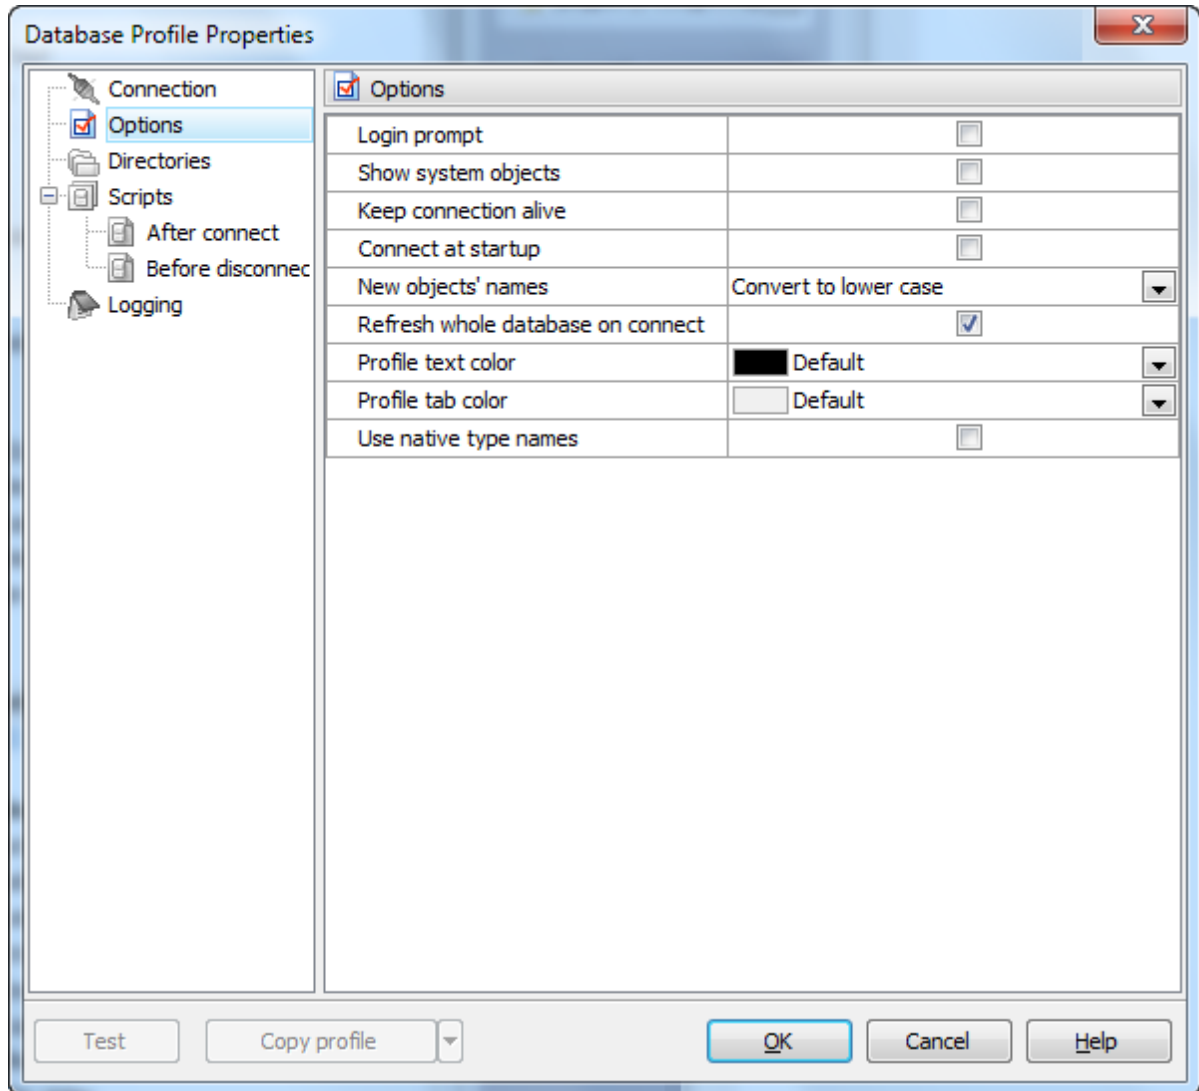

☒ **Login prompt**

Use the option to enable AnySQL Maestro to prompt for user name and password every time you connect to the database.

☒ **Show system objects**

Check the option to make system objects visible.

☒ **Keep connection alive**

Check the box for pinging server before each query execution.

☒ **Connect at startup**

With this option on connection to the profile database is automatically established at the application startup.

New objects' names (Don't change case, Convert to upper case, Convert to lower case)
Use the option to change the case for newly created objects.


☒ Refresh whole database on connect

Use the option along with the [Show empty schemas](#)¹⁸⁰ explorer options to hide/show empty schemas in the explorer tree.

You can also change here the font color the profile name is represented at the Explorer tree.


3.2.3 Setting default directories

Use the tab to specify the [default directories](#) respectively for database extract, data export, data import, and data dump.

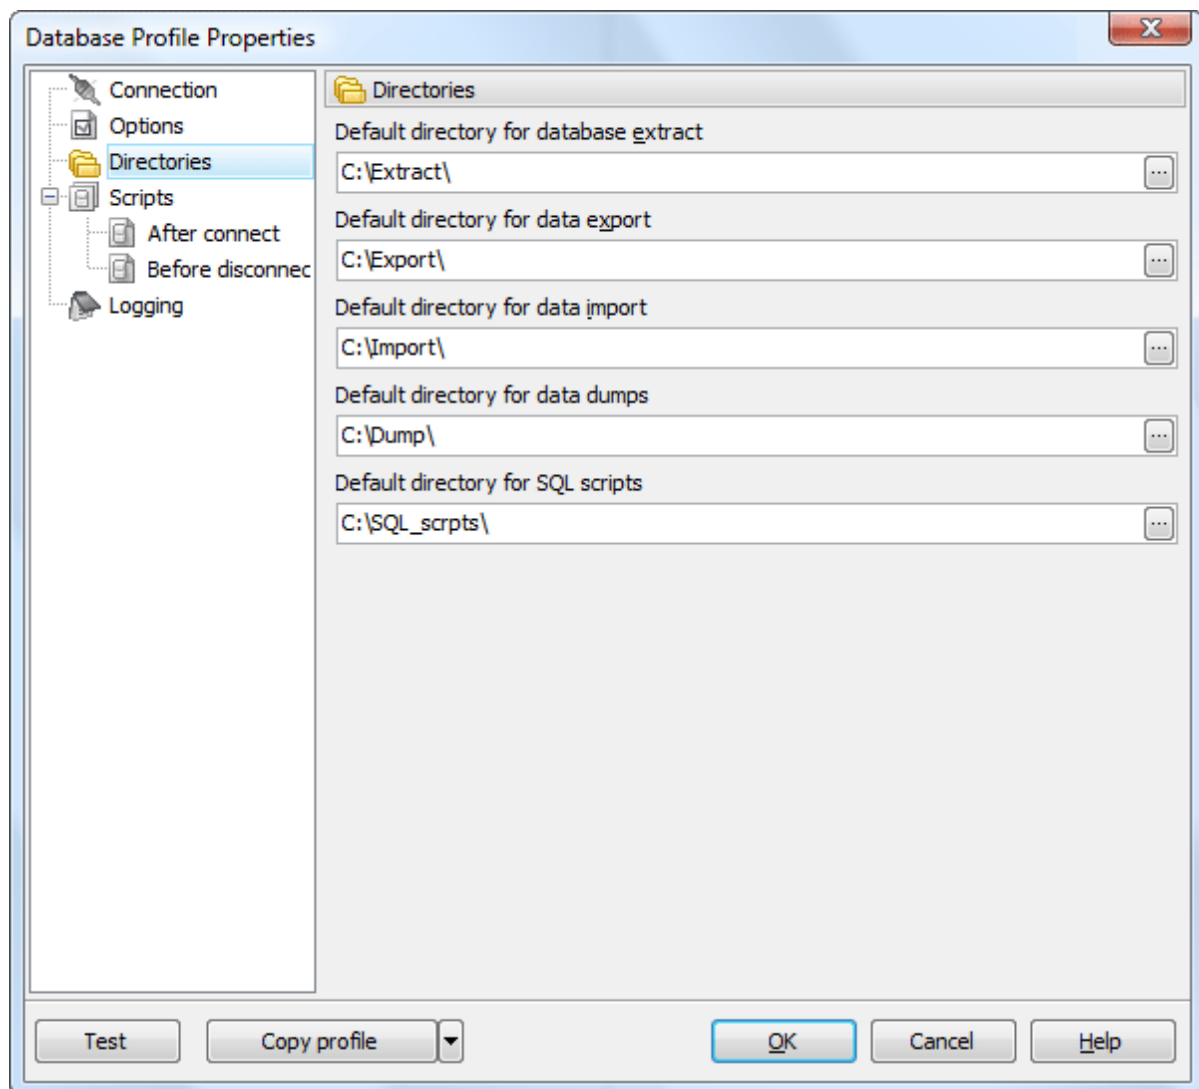


3.2.4 Editing obligatory scripts to execute


Use the tab to specify the obligatory scripts to execute in all database connections established by the software (on executing queries, browsing objects data, etc.). There is a possibility to enable/disable a written script.

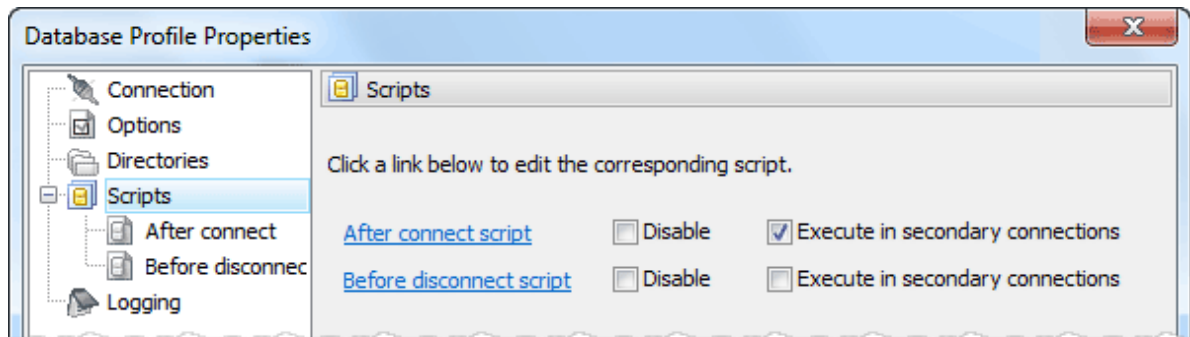

Below you can find an example of an obligatory script to execute after AnySQL Maestro will connect to the database. The script writes a connect time to the log table.

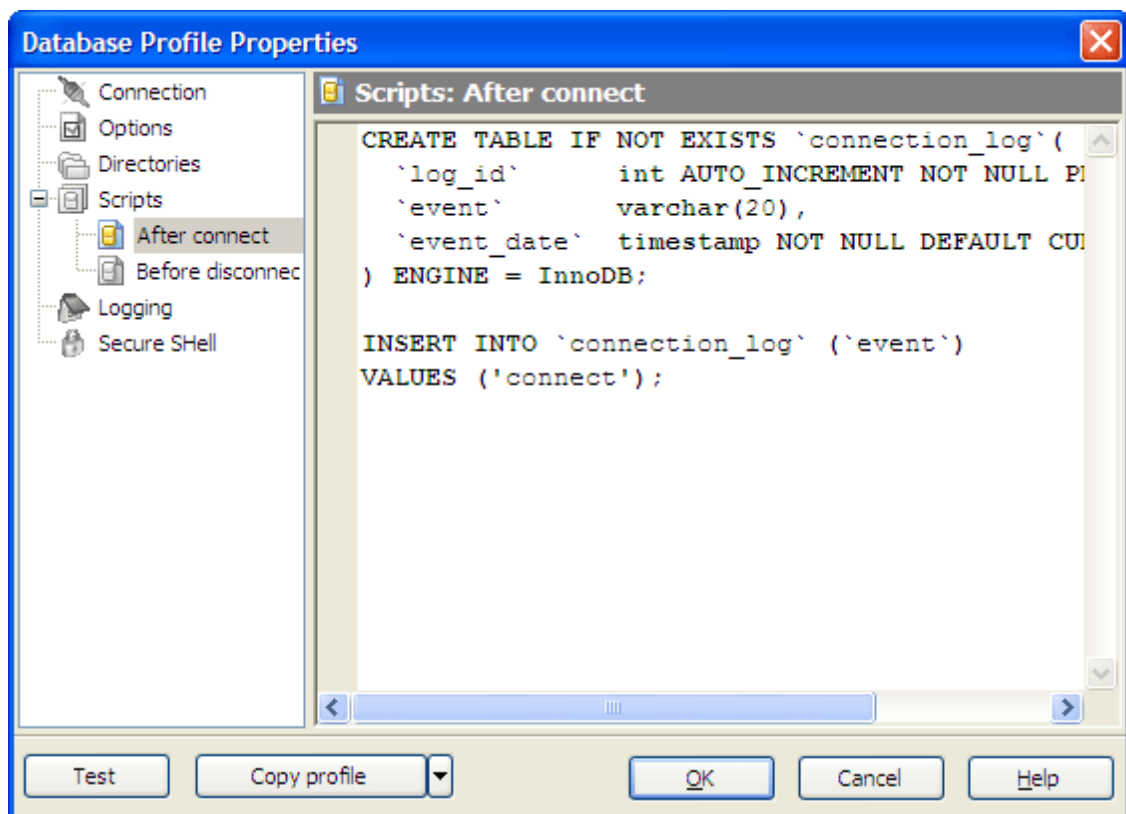


The next screen represents the example of an obligatory script to execute before AnySQL Maestro will disconnect from the database. The script writes a disconnect time to the log table.

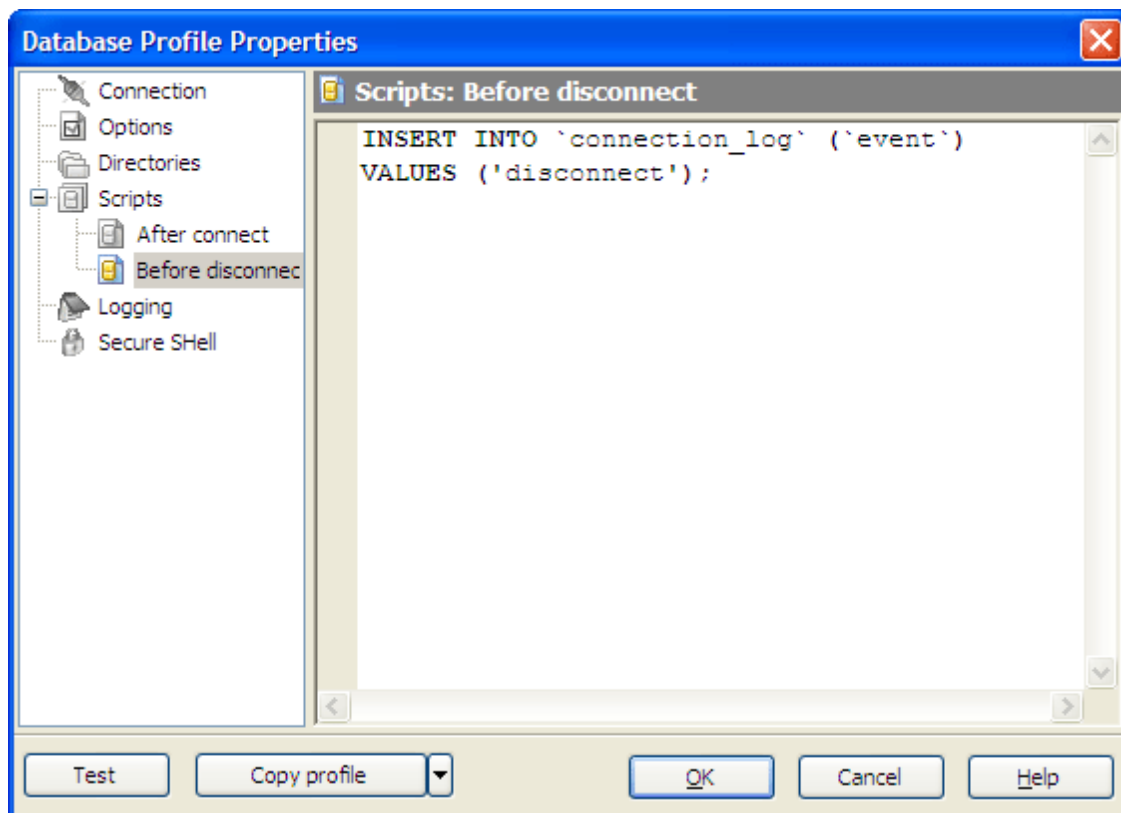


3.2.5 Setting log options


Enable/disable [metadata changes logging](#) and [SQL query logging](#) and specify the corresponding log file names if necessary.

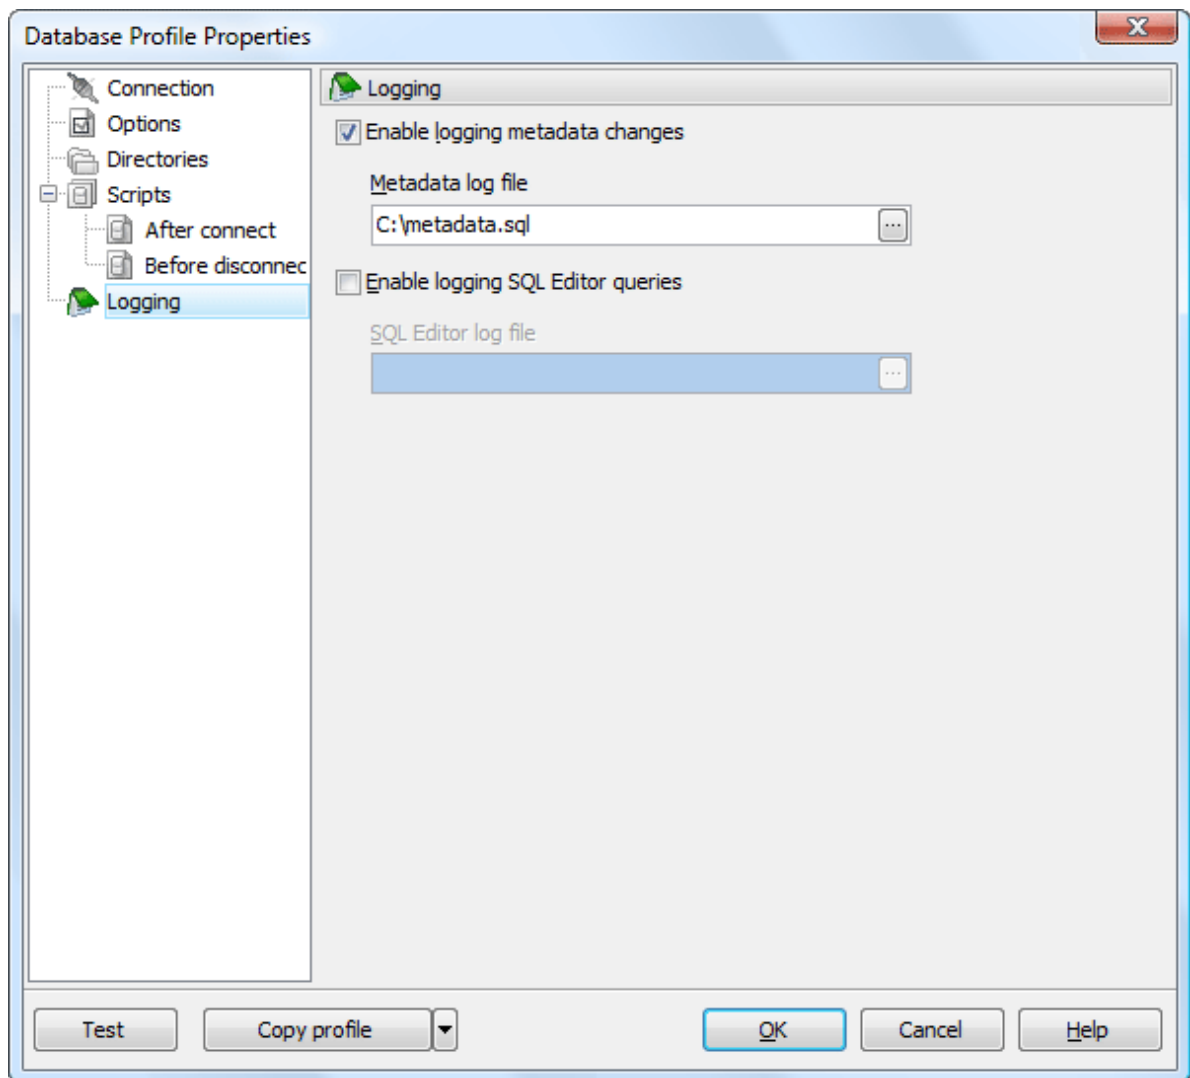

3.2.6 Statistics

This tab allows you to view usage statistics for the current profile. Click the **Reset Statistics** button to clear all the displayed values.

 Statistics

 **Statistics**


| | |
|------------------------|---------------------|
| Creation time | N/A |
| Last modification time | N/A |
| Number of connections | 6 |
| Last connection time | 18.08.2017 16:14:16 |
| Total uptime | 2:03:51:22 |

Reset statistics

3.3 Database Editor

Database Editor allows you to browse, add, edit and delete all objects of the selected database and its main properties.

To open the editor, use popup menu of the database node at the Explorer tree.

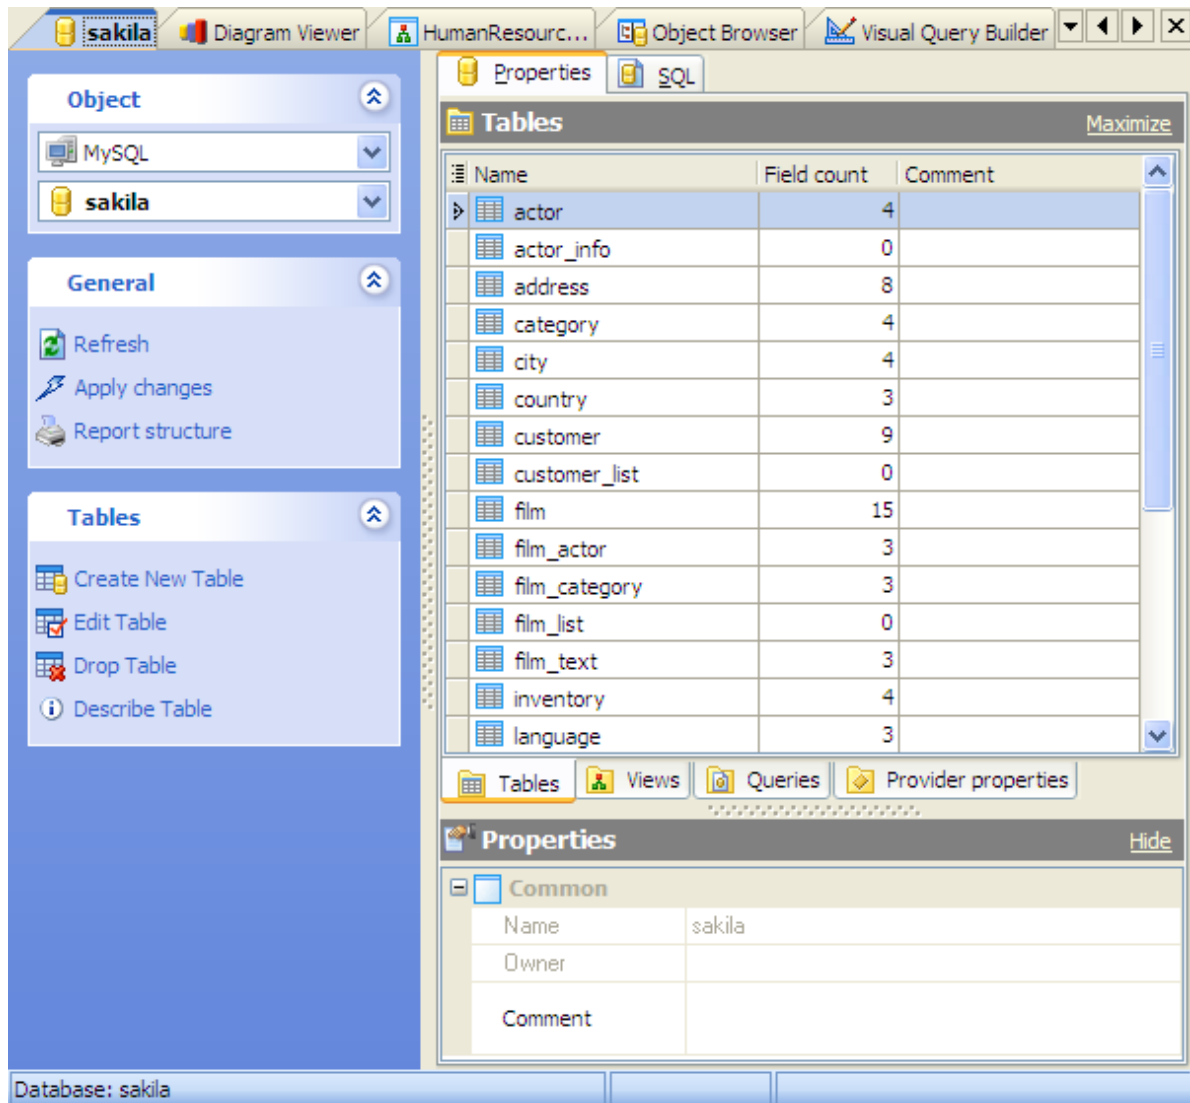

Subitems

Every tab is intended for managing corresponding database objects (e.g. *tables*, *views*, *queries*, etc.). Open the object in its editor by double-clicking or pressing the **Enter** key. The popup menu allows you to create new, edit or drop the selected database objects. Using this menu you can also create a copy of the object.

You can operate on several objects at a time. For this you have to select database objects with the **Shift** or the **Ctrl** key pressed. After the group of objects is selected, you can operate on it, e.g. delete several objects at once, as it was a single object.

4 Database Object Management

AnySQL Maestro provides you with several tools to manage and navigate database objects. To browse and modify objects, at least one connection to a database should be established.

- [Browse Database Objects](#) ⁴⁴
- [Create New Objects](#) ³⁴
- [Edit Existing Objects](#) ³⁷
- [Duplicate Objects](#) ³⁹

The options to create or edit an object in AnySQL Maestro follow the parameters defined by database. If you need clarification on what an option means or how it should be used, see database's documentation for more information. The documentation provides detailed description of objects, including their purpose, properties, and restrictions. The AnySQL Maestro manual provides you with only brief review of database objects.

4.1 Create Objects

AnySQL Maestro provides a number of [Create Object Wizards](#)^[34] to accomplish the most facile database object creation.

There are several ways to invoke the necessary Create Object Wizard:


- select the [Object | Create Database Object...](#) main menu item;
- select the necessary icon (table, query, view, trigger, etc.) in the [Create Database Object](#)^[34] dialog

or

- select the object list (Tables, Views, Triggers, etc.) or any object from that list in the Explorer tree ([Object Manager](#) and [Object Browser](#));
- select the [Create New Table \(View, Trigger, etc.\)...](#) item from the popup menu or press **Insert**.

4.1.1 Create Database Object Dialog

The [Create Database Object](#) dialog allows you to create any type of database object supported by AnySQL Maestro. To open the dialog select the [Object | Create Database Object...](#) main menu item or use the **Shift+Ctrl+N** hot keys combination. Select an object type icon and click the **OK** button to invoke the corresponding wizard or dialog.

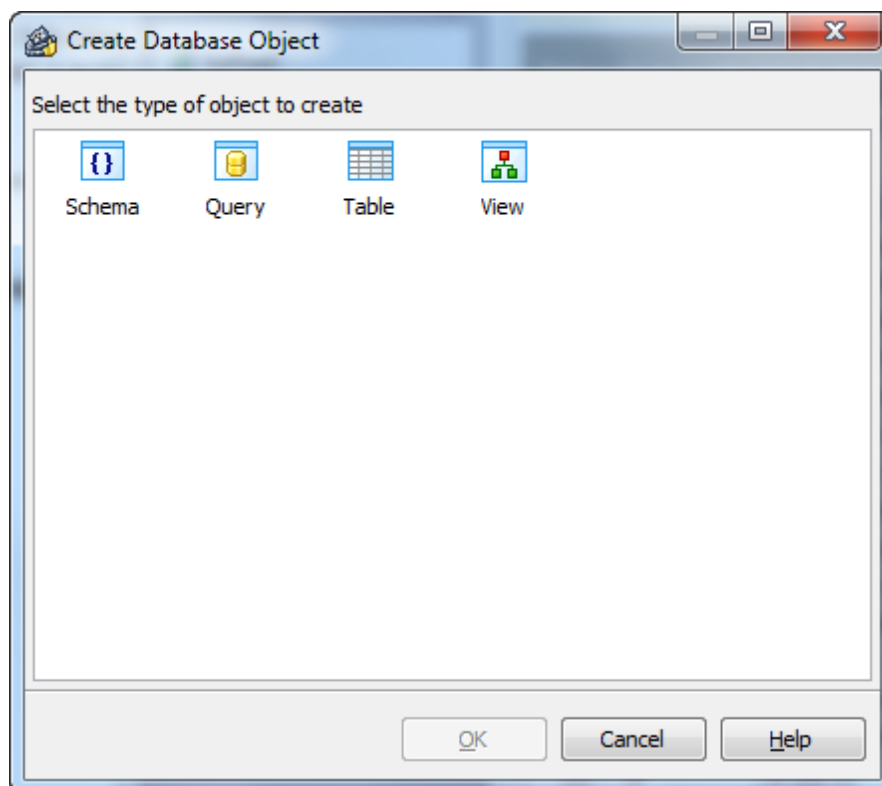

4.1.2 Overview of Create Objects Wizards

Several steps of Create Object Wizards are common for all of them. This part purpose is the formulation of the basic principles for the [Create Object Wizard](#) organization.

- On the [first wizard step](#)^[36] you need to specify the new object name.
- On the second one you have to define all the object properties. To clear up the object properties meanings see the appropriate topic of the respective Create Object Wizard section.
- Some objects has subitems (e.g. each table contains fields, indexes etc). In this case the next step allows you to manage such subobjects of the object being created. We recommend you to store the following shortcuts in order to speed your work: the Ins key adds a new subobject, the Enter key displays the subobject's editor, and the Del key drops the subobject.
- The [next wizard step](#)^[36] is final. It is provided to sum up the [Create Object Wizard](#) operation.

Note: There are some objects to have an additional [Create Object Wizard](#) steps. The detailed description of the steps you can find at the appropriate topic of the corresponding section.


See also:

- [Create Schema Wizard](#)^[54]
- [Create Table Wizard](#)^[59]
- [Create View Wizard](#)^[74]
- [Creation of a New Query](#)^[81]

4.1.2.1 Setting object name

Select the container (table, schema, database, etc.) for the new object from the list of available containers and enter the new object [name](#) in the respective box.

Note: the name of the object must be unique among all the object names in its container. Moreover, all the objects that are source of data need unique names among themselves. You can use any identifier that is allowed by database server.

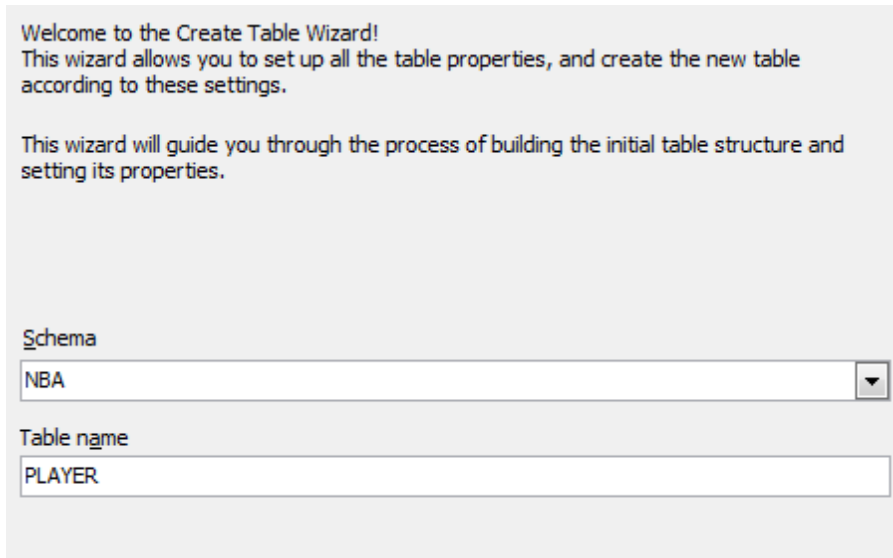

Welcome to the Create Table Wizard!
This wizard allows you to set up all the table properties, and create the new table according to these settings.

This wizard will guide you through the process of building the initial table structure and setting its properties.

Schema
NBA

Table name
PLAYER

4.1.2.2 Viewing common information

At this step common information about the object to be created is displayed. Select the [Open object editor after creating option](#) to open the appropriate [Object Editor](#) after the new object is created. Click the [Ready](#) button to complete creation of the object.

The following schema is selected:

NBA

The following table will be created:

PLAYER

☒ [Open table editor after creating](#)

Click "Ready" to create a new table.

4.2 Edit Objects

AnySQL Maestro allows you to view and modify existing database objects in several ways:

- edit object comment with the [Describe Object](#)^[38] dialog;
- view and modify the object including subitems within the object editor.

To open an [Object Editor](#)^[37], just double click its node in the [Database Explorer](#) tree. Of course this action is also available through popup menus, navigation bars, and so on.

4.2.1 Overview of Object Editors

[Database Object Editors](#) are the basic AnySQL Maestro tools for working with existing objects. The proper editor can be opened automatically after the object is created. You can also open the necessary object editor with the corresponding items of popup menus of the [Explorer Tree](#)^[44], [Object Manager](#)^[49] or [Object Browser](#)^[47].

The editors consist of a several tabs. Some tabs are similar for all editors. This part purpose is to formulate the basic principles of all [Object Editors in AnySQL Maestro](#).

- To edit object options such as name, owner, etc. use the [Properties](#) tab. To understand an option, see the appropriate topic of the corresponding [Object Editor](#) manual section and database documentation.

This tab also allows you to manage objects belonging to the selected one. To reset any tab to default settings, open it when holding the **Ctrl** key.

- Most of objects have a possibility to be created from an SQL script (SQL definition). If so, the corresponding script is available at the [SQL](#)^[37] tab of the editor.

Note: Some object editors have additional tabs. The detailed description of them you can find at the appropriate topic of the corresponding section.

To apply the changes, select the [Apply Changes](#) item in the [Navigation bar](#) or use **Ctrl+F9** or **Ctrl+F7** shortcut keys.

It is also possible to modify object properties without opening the object editor: use the [Object Properties](#) item of the popup menu of the selected object from the explorer tree.

See also:

- [Schema Editor](#)^[56]
- [Table Editor](#)^[60]
- [View Editor](#)^[78]

4.2.1.1 SQL Definition

The [SQL](#) tab displays the SQL definition for the object with all its properties. Bear in mind that this text is read-only. If you want to change the object definition, use the appropriate editor tabs instead, or copy the text to the Windows Clipboard to paste it in [SQL Editor](#) or [SQL Script Editor](#).

The SQL definition window allows you to browse the text effectively. The popup menu and the extensive system of hot keys give you the opportunity to search expressions within the text, to select the whole text for copying it to the Windows Clipboard, to save the definition to the *.sql or *.txt files, to print the document, etc.

You can customize the displayed definition using the [Editors & Viewers](#)¹⁹⁷ options.

The [Properties](#) item of the popup menu displays the [Options](#) dialog in which you can establish optional settings concerning the current database.

The [Code Folding](#) item group makes it possible to view either the whole text or its logical parts (regions). Each region can be collapsed and extended.

In [extended mode](#) the whole text is displayed (set by default)

In [collapsed mode](#) the text is hidden behind one text line denoting the first line of the collapsed region.

[Navigation Bar](#) on the [SQL](#) tab allows you to copy the object's SQL definition (DDL) to the [SQL Script Editor](#) for future modifications.

4.2.2 Describe Objects

Essentially a comment is the most often altered object property. To simplify its editing, the AnySQL Maestro provides an ability to [Describe the object](#) within the [Database Explorer](#) immediately without opening of the object's editor.

Step-by-step:

- Select the necessary object in the explorer tree;
- Choose the [Describe Object...](#) item in the popup menu;
- Edit object comments within the [Describe Object](#) window;
- To commit the changes, push [OK](#) button.

4.3 Duplicate Objects

AnySQL Maestro offers several ways of objects duplicating.

1. **Duplicate Object Wizard.** The wizard is the most flexible tool of the coping. Along with a possibility to adjust the new object definition it allows you to copy data (for tables). But it consists of [several steps](#)^[39] and takes more time than other manners.
2. **Duplicate Object** window allows you to attune new object's SQL definition. It is preferred for creation a copy of selected object. [Here](#)^[41] you can find some additional info.
3. By [Drag-n-Drop](#)^[42] operation.

4.3.1 Duplicate Object Wizard

The [Duplicate Object Wizard](#) allows you to create a new database object with the same properties as the existing one. It is the most flexible tool of copying objects provided by AnySQL Maestro. It also allows you to copy data of the selected table to the new one.

To run the wizard select the [Object | Duplicate Database Object...](#) main menu item.


- [Selecting source and destination databases](#)^[39]
- [Selecting object to duplicate](#)^[40]
- [Modifying definition of a new object](#)^[41]

See also: [Create Database Object](#)^[34]

4.3.1.1 Selecting source and destination databases

Select the database containing a source object from the list of connected databases, and then specify the database for the duplicated object.


You should connect to the destination database beforehand (see [Database Management](#)^[21]).

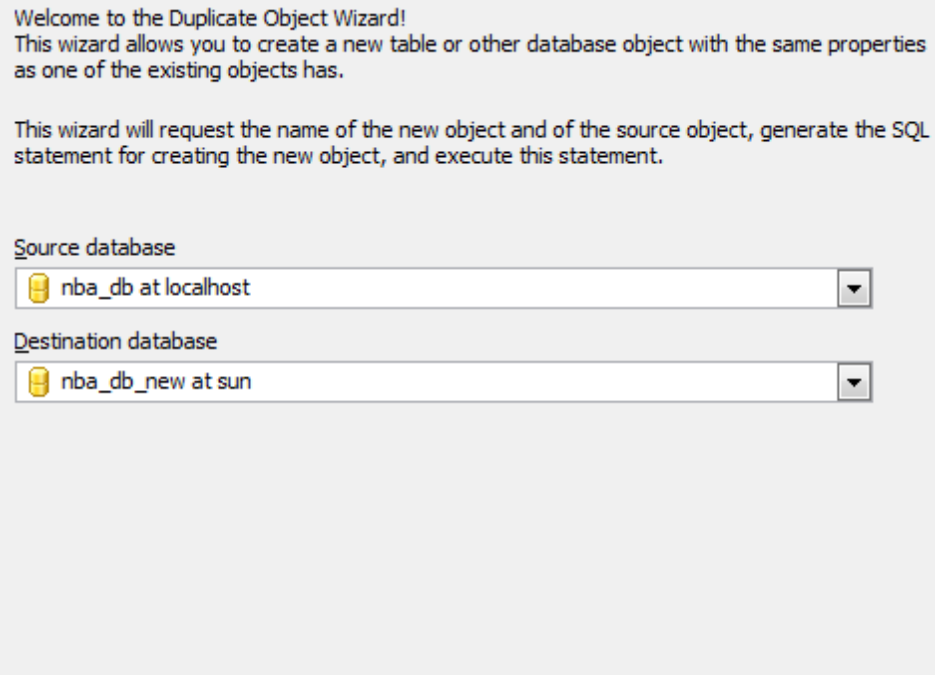

4.3.1.2 Selecting object to duplicate

Specify a database object to create the new one with the same properties.

1. Select the type of the object to duplicate from the [Source objects](#) drop-down list.
2. Pick up the necessary object from the list.

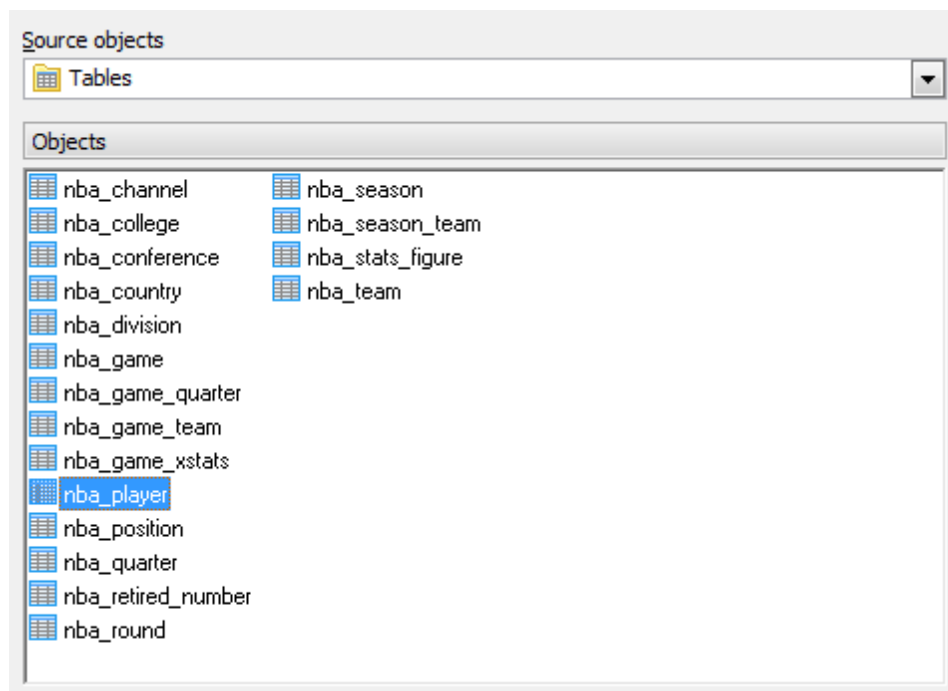

4.3.1.3 Modifying new object definition


The last wizard step allows you to edit the new object definition directly.

Use this step to edit the name of object been creating ([New Object Name](#)). By default AnySQL Maestro generates the new object definition with the same name if the duplicating is to the source database, or like "%SOURCE_OBJECT_NAME%01" otherwise.

Note: the name of the object must be unique among all the object names in its container. Moreover, all the objects that are source of data need unique names among themselves. You can use any identifier that is allowed by database server.

You can edit the result SQL statement manually, add or remove fields, change field types, using the [New object definition](#) text area. Click the [Ready](#) button to complete the operation.

Check the according boxes to [Copy Data](#) (only for tables) and to [Open Object Editor](#) after the duplicating.

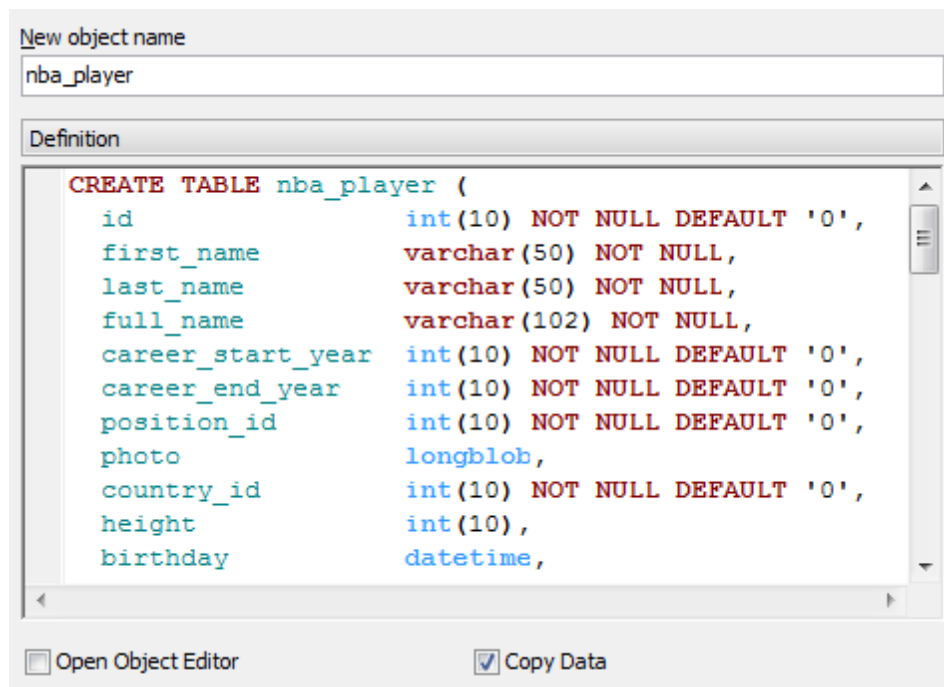

New object name

nba_player

Definition


```
CREATE TABLE nba_player (  
    id                int(10) NOT NULL DEFAULT '0',  
    first_name        varchar(50) NOT NULL,  
    last_name         varchar(50) NOT NULL,  
    full_name         varchar(102) NOT NULL,  
    career_start_year int(10) NOT NULL DEFAULT '0',  
    career_end_year   int(10) NOT NULL DEFAULT '0',  
    position_id       int(10) NOT NULL DEFAULT '0',  
    photo             longblob,  
    country_id        int(10) NOT NULL DEFAULT '0',  
    height            int(10),  
    birthday          datetime,
```

☐ Open Object Editor ☒ Copy Data

4.3.2 Duplicate Selected Object

Within the [Duplicate Object](#) window you can duplicate a selected object fast and with some modifications.

It is available from the corresponding link of the object's popup menu at the [Database Explorer](#).

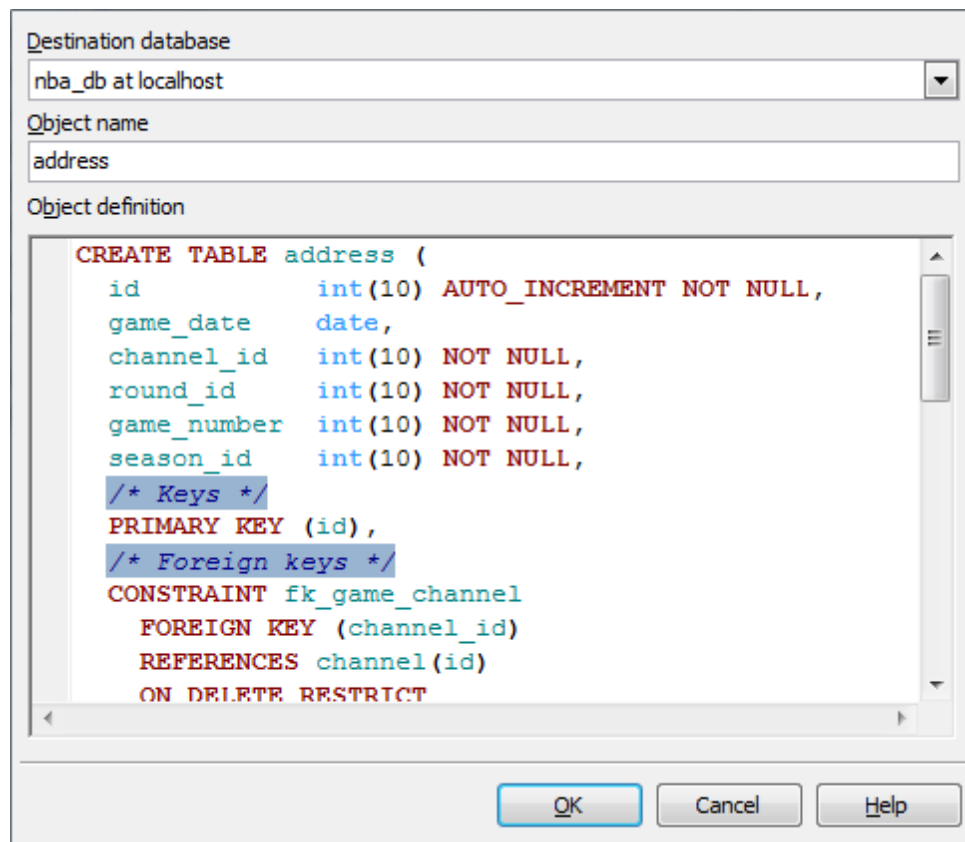

Select the [database](#) for a new object from the list of connected databases first.

Enter the [name](#) for the new object.

Note: the name of the object must be unique among all the object names in its container. Moreover, all the objects that are source of data need unique names among themselves. You can use any identifier that is allowed by database server.

You can also edit the SQL [definition](#) of the object if necessary (add or remove fields, change field types, etc.).

4.3.3 Copy, Paste and Drag-n-Drop features

AnySQL Maestro provides you with an ability of copying database objects within the database or even from one database to another (in this case you should connect to both the source and the destination databases first).

To copy an object, just drag the object in a source window (such as [Database Explorer](#), [Object Manager](#), [Object Browser](#)) and drop it to the target container in another window. You also can use the [Edit | Copy](#) and the [Edit | Paste](#) main menu items or the **Ctrl+C**/**Ctrl+V** hot keys combinations respectively. Copying several objects at a time is also available.

It is also possible to drag and drop objects between [Database Explorer](#), [Object Manager](#), [Object Browser](#) and [SQL Editor or SQL Script Editor](#). This works as follows:

SQL Editor: after dropping the object you will get a query to retrieve object data (e.g. `SELECT * FROM table_name`) or the full name of the object if it doesn't contain data (domains, indexes, etc.).

SQL Script Editor: after dropping the object you will get its SQL definition if applicable.

See also: Database Explorer, Object Manager, and Object Browser

4.4 Browse Objects

AnySQL Maestro allows to browse objects stored in a Remote Server database in several ways:

- [Database Explorer](#)^[44]: objects are represented as a hierarchy (grouped by kind and listed under the according database node, provided with subobjects if exist)
- [Object Browser](#)^[47]: an extension of explorer with ability to sort, group, filter and multiple select objects.
- [Object Manager](#)^[49]: an extension of the explorer with ability to select several objects at a time (to copy, drop, etc.)

All tool allows you to drag-and-drop between them and to perform all necessary operations upon database objects.

4.4.1 Database Explorer

Database Explorer is the basic feature of AnySQL Maestro which allows you to perform practically all necessary operations upon databases and their objects. The Database Explorer area occupies the left side of the AnySQL Maestro main window. All the objects at the Explorer tree are grouped by kind and listed under the according database node.

To start working with a database you need to create its profile first. The conception of database profiles gives you an opportunity to connect to databases in one touch and work with the selected databases only.


See also: [Object Manager](#)^[49], [Object Browser](#)^[47]

Note: In case your databases have a large quantity of objects you can speed up the object search by typing first letters of the object name in the explorer area.

Note: [Explorer options](#)^[180] allow you to hide/display table subobjects, represent system objects in different color, etc.

The sections below describe each of these actions in detail.

- [What operation can I accomplish upon database profiles within the Explorer Tree?](#)^[45]
- [How can I connect to a database?](#)^[44]
- [How can I disconnect from a database?](#)^[46]
- [What operations can I accomplish upon database objects within the Explorer Tree?](#)^[46]
- [Can I copy a database object from one database to another?](#)^[46]
- [Can I filter Explorer content?](#)^[46]

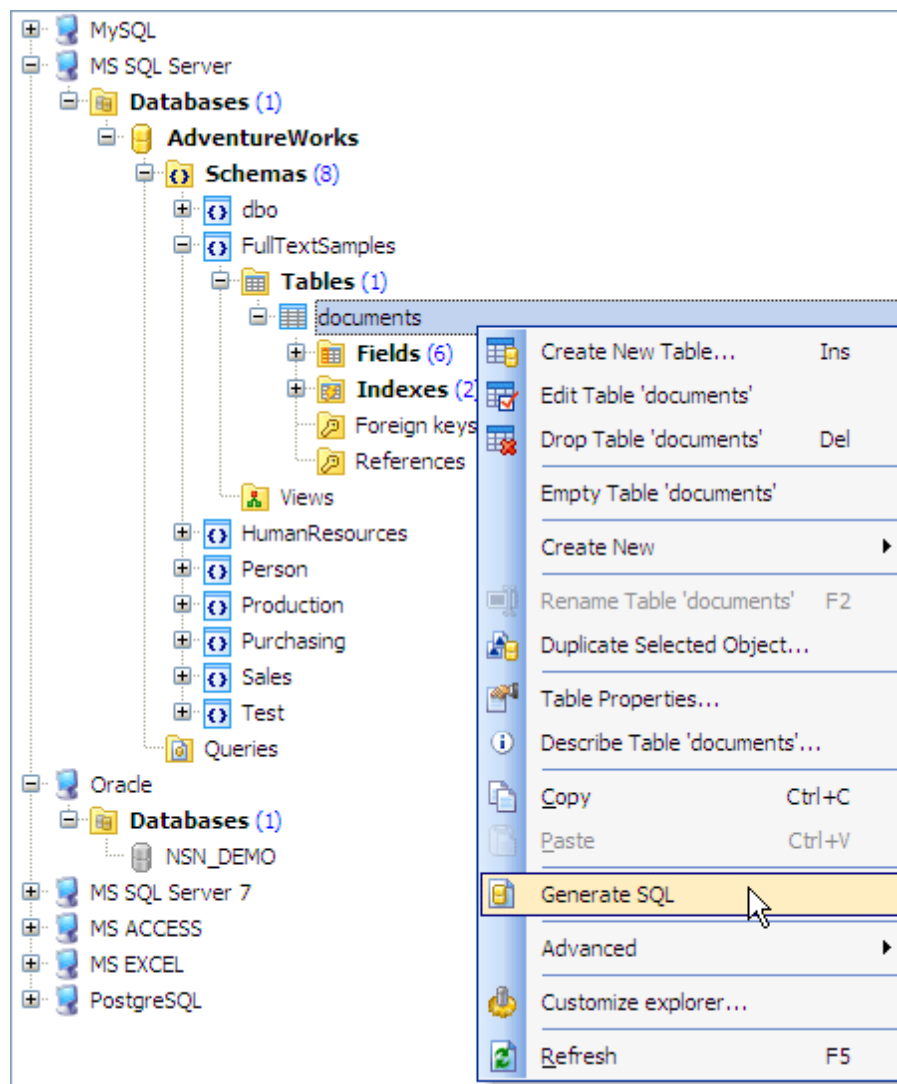

Operations upon database profiles in the Explorer Tree

Using popup menu of the Explorer area you can realize the following operations:

- [create new database profiles](#) (the Create Database Profiles... item);
- rename currently selected database profile (the Rename Database Profile... item);
- [edit currently selected database profile](#) (the Edit Database Profile... item);
- reorder existing database profiles (the Reorder Databases...item of Databases node's popup menu or using drag-n-drop);
- reorder servers (the Reorder Servers...item of a server's popup menu);
- remove currently selected database profile from the explorer tree (the Remove Database Profile item);
- remove all profiles of selected server (the Remove all Profiles item of Databases node's popup menu).

In addition to these operations, Database Explorer gives you an ability to reorder existing profiles by performing drag-and-drop operations within the explorer tree.

How can I connect to a database?

You can establish connection to a database in Database Explorer by selecting the database profile and double-clicking it or pressing the Enter key (alternatively, you may use the Shift+Ctrl+C hot key combination). The same operation is also available through the Connect to Database item from the explorer popup menu, or through the Database | Connect to Database main menu item.

How can I disconnect from a database?

You can abort connection from a database in Database Explorer by selecting the database profile and pressing the Shift+Ctrl+D hot key combination. The same operation is also available through the Disconnect from Database item from the explorer popup menu, or through the Database | Disconnect from Database main menu item.

Operations upon database objects

Database Explorer allows you to perform the following operations with database objects using its popup menu (note that the popup menu contains object-specific items only when some database object is currently selected in the explorer tree):

- create a new database object (the Create New Object... item);
- edit currently selected database object (using the Edit Object... item, pressing the Enter key or double-clicking the database object);
- drop the selected object from the database (the Drop Object... item);
- rename the selected database object (the Rename Object... item);
- edit the database object properties (the Object properties ... item);
- duplicate the selected object (the Duplicate Object... item).
- run the Object Browser tool (the Browse ... item).

Can I copy a database object from one database to another?


Database Explorer provides you with an ability of copying database objects from one database to another. To perform this operation, you should connect to both the source and the destination databases first. After the connection is established, simply drag and drop an object to copy from the source database to the corresponding node (Tables, Queries, etc.) of the destination database.

Note: You also can use the Edit | Copy and the Edit | Paste main menu items to copy/paste a database object using Windows clipboard (alternatively, you may use the Ctrl+C/Ctrl+V hot keys combinations respectively).

4.4.1.1 Filtering explorer content

AnySQL Maestro allows you to reduce the number of represented objects in the explorer tree. To hide seldom usable objects, filter your explorer content.

Filter Panel is available through the View | Show Filter Panel main menu item.

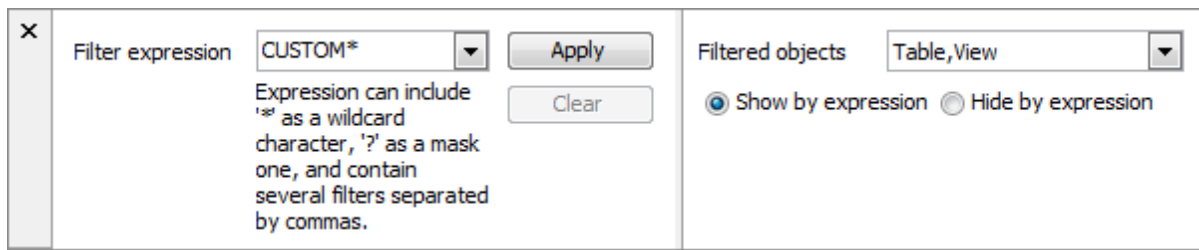


- Specify the Filter expression. The expression can contain any part of object name combined with an asterisk ('*') as a wildcard character and a question-mark ('?') as a mask character.
- Define the Filtered objects, object types for filtering in the explorer tree.
- Check the according radio button (Show by expression, Hide by expression) to define whether database objects will be shown or hidden in accordance with the filter expression.
- Click Apply button.

Note: A filter expression, if applied to the content of Database Explorer, is applied to the content of [Object Manager](#)^[49] and [Object Browser](#)^[47] as well.

4.4.2 Object Browser

[Object Browser](#) is a tool for operating on database objects designed as an extension of [Database Explorer](#)^[44] with ability to *sort*, *group* and *filter* the database objects. It also provides such operation as multiple selecting of objects (for *copying*, *dropping*, etc.) and the ability of using drag-and-drop operations between [Object Browser](#) and [Database Explorer](#). To open [Object Browser](#) select the [Object | Object Browser](#) main menu item.

Note: At least one connection to a database should be established to make [Object Browser](#) available.

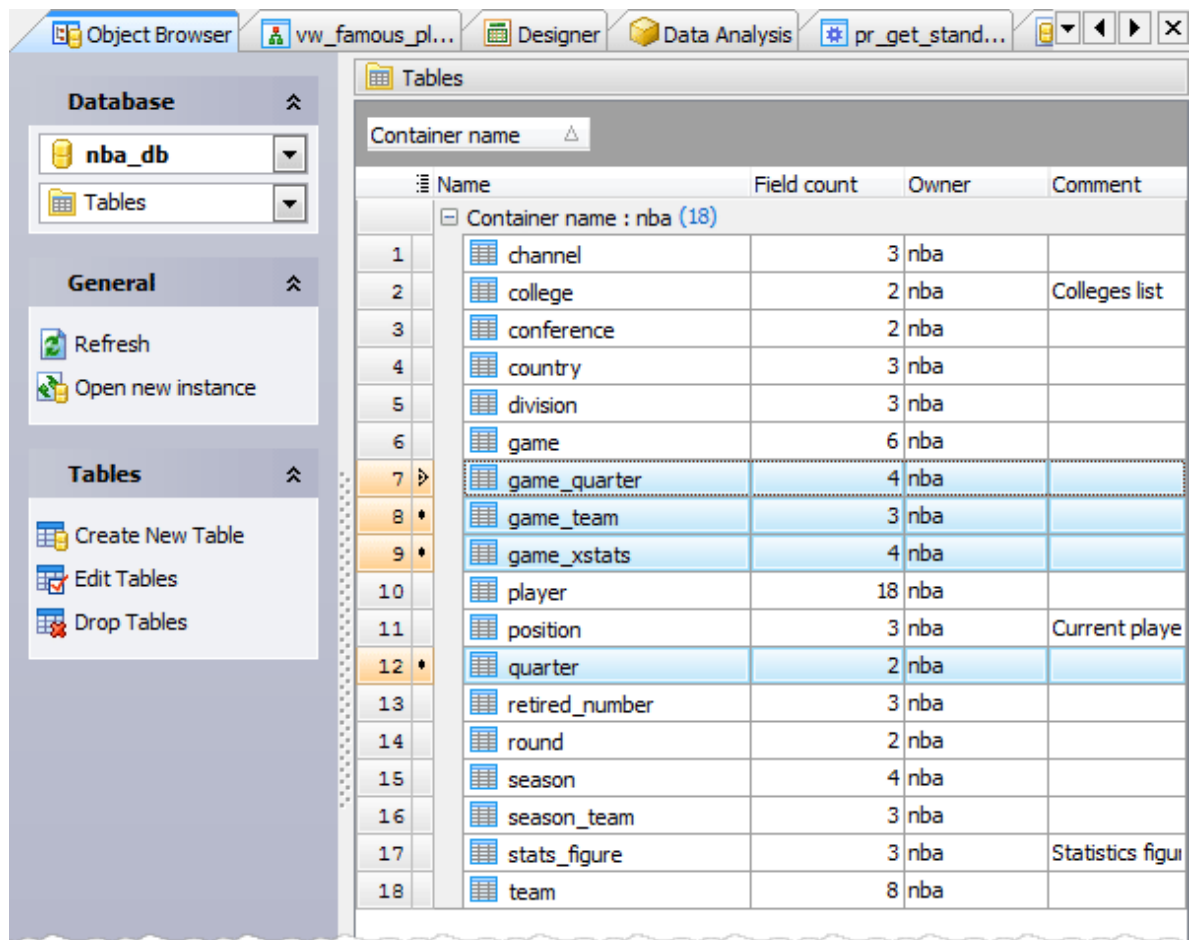

Sorting database objects

Object Browser represents database objects in a grid. The object kind to display is defined on the top of the **Navigation bar**. The columns correspond to the objects properties and rows correspond to the objects. Click the column caption to sort objects by the values of this column in the ascending or descending mode. The navigation buttons allow you to open current object editor, create new or drop the existing one.

As **Object Manager** the browser allows you to operate on several objects at a time. You have an opportunity to select a batch of objects and after the object group is selected, you can operate on it (e.g. *drop several objects at once*) as if it were a single object.

The unique feature of the AnySQL Maestro is an opportunity of drag-and-drop operations between **Object Browser** and **SQL Editor**, **SQL Script Editor**. After the action objects are represented in **SQL Editor** as SQL queries (if they contain data) or as their full name in the database otherwise. **SQL Script Editor** displays the objects as SQL definition.

Grouping database objects

You can group grid objects by any of the columns by dragging the column header to the destination area. Now all the records are displayed as subnodes to the grouping row value as shown in the picture. To reverse grouping, just drag the column name from the upper area back.

Filtering database objects

You can filter objects in the grid using one of the following methods:

- use the drop-down button in the column caption area to filter objects by the value of the selected column
- click the drop-down button in the column caption area, then select the [Custom](#) item and build a simple filter within the dialog in the following way: select a logical operator for checking the column values (like is less than, is greater than, etc) and set the value to be checked by this operator in the neighboring box; then set the second condition if necessary in the following way and set the relation between these two conditions, whether both of them should be matched or just one of them; use the '_' character to represent any single symbol in the condition and the '%' character to represent any series of symbols in the condition


After you set a filter, the filtering panel becomes visible at the bottom of the grid where you can see the active filtering condition and easily enable or disable it by clicking the check box on the left. Using this panel you can also customize your filter in a more complicated way by clicking the [Customize](#) button and building your filter within the Filter Builder dialog.

See also: [Object Manager](#)^[49], [Data View](#)^[98]

4.4.3 Object Manager

[Object Manager](#) is a tool for operating on database objects designed as an extension of the [Database Explorer](#)^[44] with advanced features, such as multiple selecting of objects (for *copying*, *dropping*, etc.) and the ability of using drag-and-drop operations between [Object Manager](#) and [Database Explorer](#) as well as between two instances of the [Object Manager](#). To open [Object Manager](#) select the [Object | Object Manager](#) main menu item.

Note: At least one connection to a database should be established to make [Object Manager](#) available.

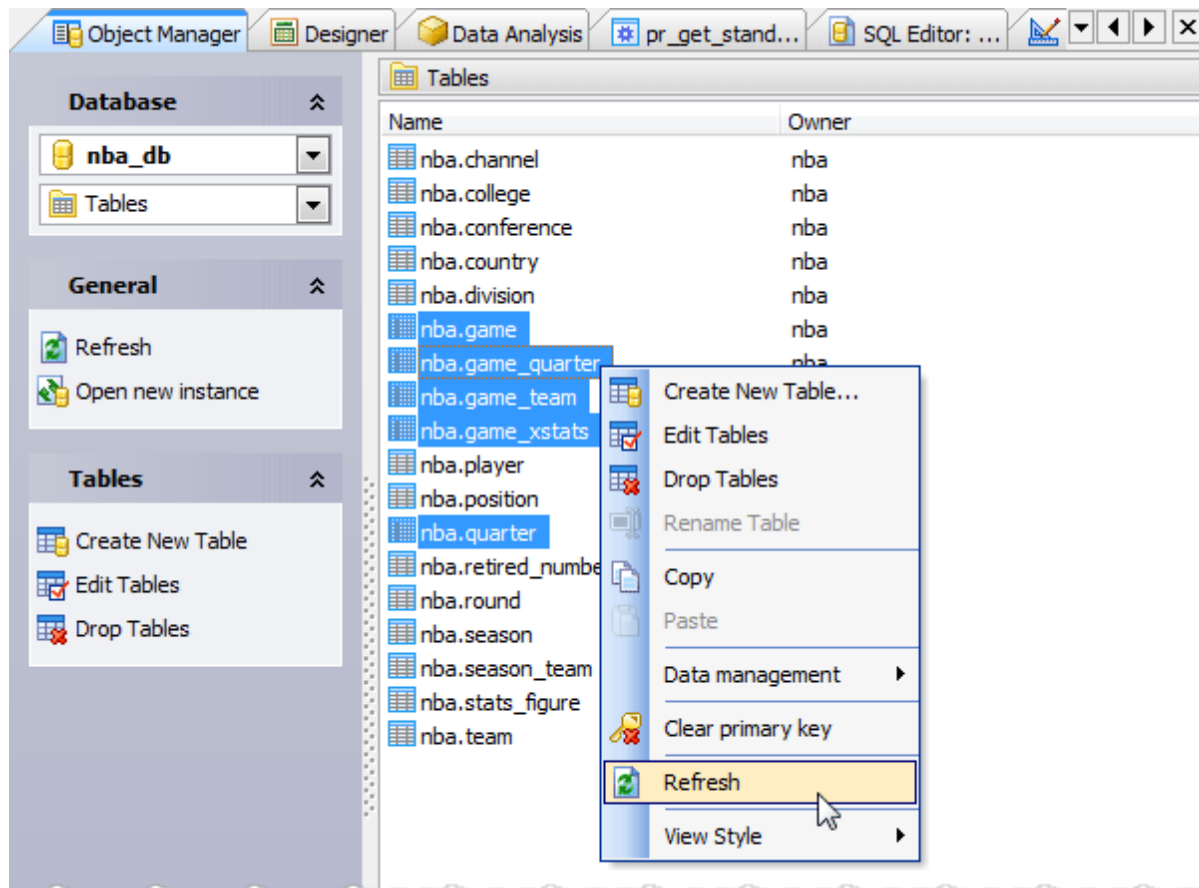

Using popup menu

The popup menu of [Object Manager](#) may have different content depending on the current selection. The common menu items allow you to switch the object list view between four standard modes (*large icons*, *small icons*, *list* and *report*), refresh the current view, and select all the objects in the view. If none of objects are currently selected, other menu items are unavailable to use, except of the one for creating a new object. If one or more objects are selected, clipboard operations (such as copy and paste) become available as well as the items for editing and dropping selected object(s).

Multiple selecting of database objects

[Object Manager](#) allows you to operate on several objects at a time. You have an opportunity to select a batch of objects and after the object group is selected, you can operate on it (e.g. *drop several objects at once*) as if it were a single object.

See also: [Object Browser](#) 

4.4.4 Filter Builder Dialog

FilterBuilderDialog allows to limit represented objects according to specified conditions. It may be useful for filtering records in data grids of Table Editors, SQL Editor or Visual Query Builder as well as to filter database objects in Object Browser, and on setting a condition on anew view creating. All these cases are similar, see how it works on the following example.

5 Database Objects

The following list contains database objects supported by AnySQL Maestro. To work with database objects you should [connect to the database](#) first.

- [Schemas](#)
- [Tables](#)
- [Views](#)

5.1 Schemas

Schemas are a purely logical structure and the privilege system determines whether one can access them. A database is a collection of schemas and the schemas contain tables, views, etc. The full hierarchy is: server, database, schema, table (or some other kind of object).

In OracleA schema is a collection of database objects. A schema is owned by a database user and has the same name as that user. Schema objects are the logical structures that directly refer to the database's data. [Schemas](#) are being implemented in PostgreSQL Server version 7.3 and higher. [Schemas](#) are being implemented in Microsoft Server 2005.

■ How can I add a new schema?

New schemas are created within [Create Schema Wizard](#)⁵⁴. In order to run the wizard you should either

- select the [Object | Create Database Object...](#) main menu item;
 - select the [Schema](#) icon in the [Create Database Object](#) dialog
- or
- select the [Schemas](#) list or any object from that list in the explorer tree;
 - select the [Create New Schema...](#) item from the popup menu
- or
- open the database in [Database Editor](#) and the [Schemas](#) tab there;
 - press the **Insert** key or select the [Create New Schema](#) item from the popup menu (alternatively, you may use the corresponding link of the [Navigation Bar](#)).

To create a new schema with the same properties as one of the existing schemas has:

- select the [Object | Duplicate Database Object...](#) main menu item;
- follow the instructions of [Duplicate Object Wizard](#).

■ How can I edit an existing schema?

Schemas are edited within [Schema Editor](#)⁵⁵. In order to run the editor you should either

- select the schema for editing in the explorer tree (type the first letters of the schema name for quick search);
 - select the [Edit Schema...](#) item from the popup menu
- or
- open the database in [Database Editor](#) and the [Schemas](#) tab there;
 - select the schema to edit;
 - press the **Enter** key or select the [Edit Schema](#) item from the popup menu (alternatively, you may use the corresponding link of

the [Navigation Bar](#)).

You can change the name of the schema using the [Rename Schema](#) dialog. To open the dialog you should either

- select the schema to rename in the explorer tree;
 - select the [Rename Schema](#) item from the popup menu
- or
- open the database in [Database Editor](#) and the [Schemas](#) tab there;
 - select the schema to rename;
 - select the [Rename Schema](#) item from the popup menu (alternatively, you may use the corresponding link of the [Navigation Bar](#)).

How can I drop an existing schema?

To drop a schema:

- select the schema to drop in the explorer tree;
 - select the [Drop Schema](#) item from popup menu
- or
- open the database in [Database Editor](#) and the [Schemas](#) tab there;
 - select the schema to drop;
 - press the **Delete** key or select the [Drop Schema](#) item from the popup menu (alternatively, you may use the corresponding link of the [Navigation Bar](#))

and confirm dropping in the dialog window.

5.1.1 Create Schema Wizard

[Create Schema Wizard](#) guides you through the process of creating a new database schema.

The basic principles of Create Object Wizards in AnySQL Maestro are explained in a [separate topic](#)^[34]. Below you will find a description of wizard steps that are unique for the current object.


Schema options

[Owner \(if allowed\)](#)

Use the field to specify the owner of the new schema. The default owner is the user who have created the schema. By default, only the owner of an object can perform various operations with the object. In order to allow other users to operate it, privileges must be granted. (However, users that have the superuser attribute can always access any object.)

[Comment](#)

The box allows you to set optional text describing the new schema.

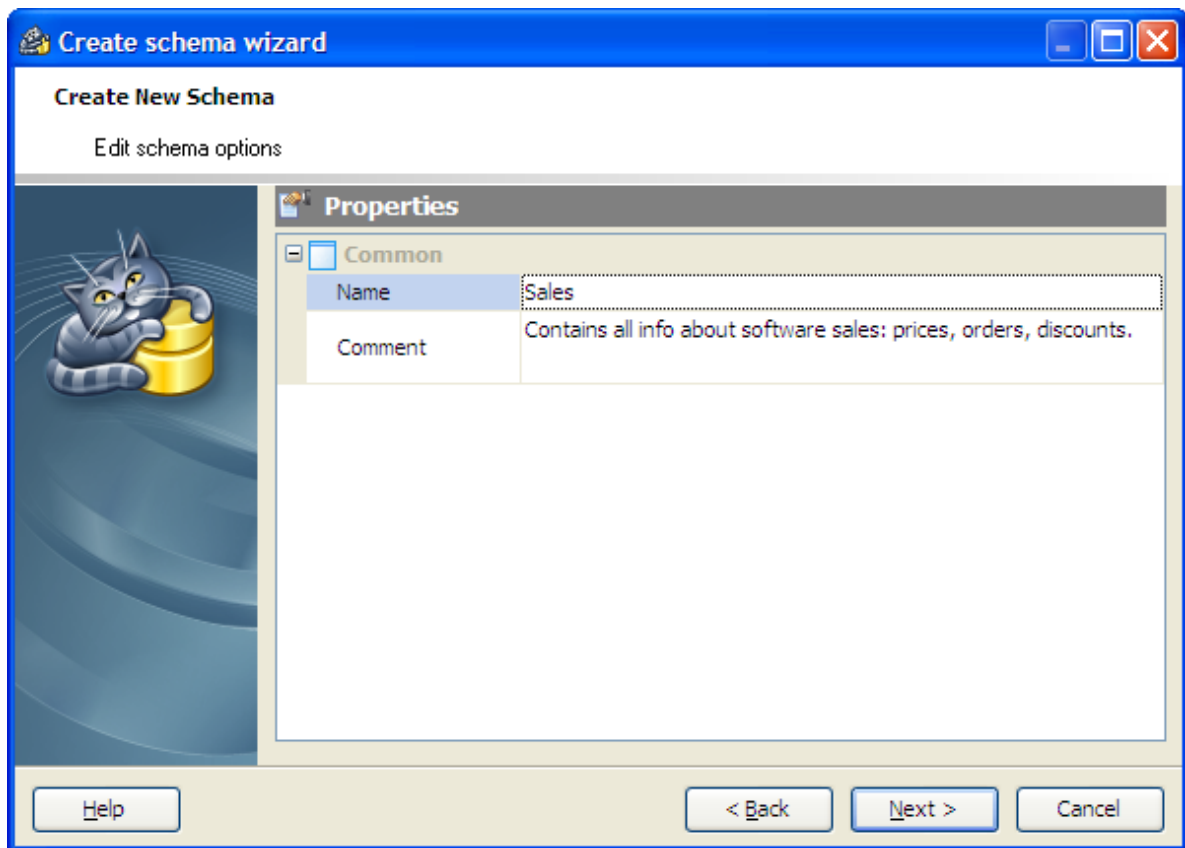


Adding schema content

This wizard step allows you to create the new schema along with schema content. To add an object to the new schema:

- Open the corresponding tab ([Tables](#) - to manage schema tables, [Views](#) - to manage schema views);
- Use the [Create Object Wizard](#) link of the tab's pop-up menu or press **Insert**;
- Complete the corresponding create object wizard. To find out the wizards description, read the corresponding topics:

[Create Table Wizard](#) 


[Create View Wizard](#) 

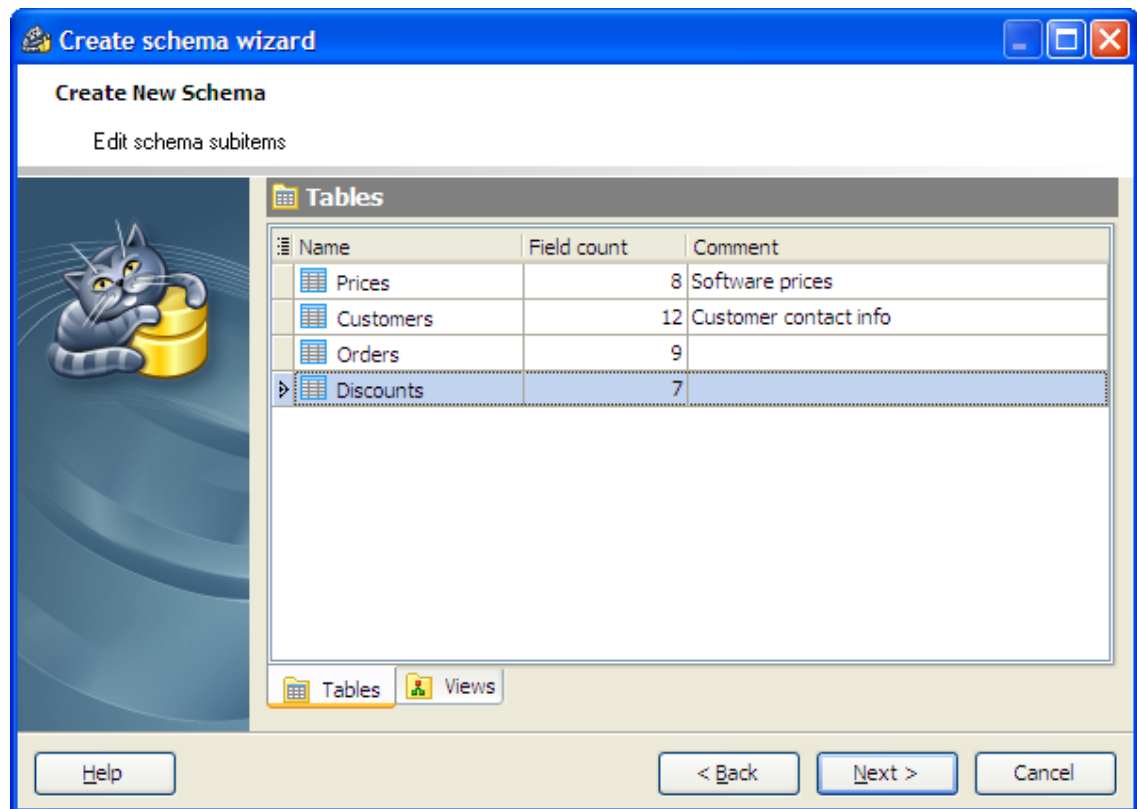

5.1.2 Schema Editor

Schema Editor allows you to browse schema content, manage users permissions on the schema objects, and see the SQL definition of this schema. To open the editor, use the corresponding items of popup menus of the [Explorer_Tree](#)^[44], [Object_Manager](#)^[48] or [Object Browser](#)^[47].

The basic principles of Object Editors in AnySQL Maestro are explained in a [separate topic](#)^[37]. Below you will find a description of editor tabs that are unique for the current object.

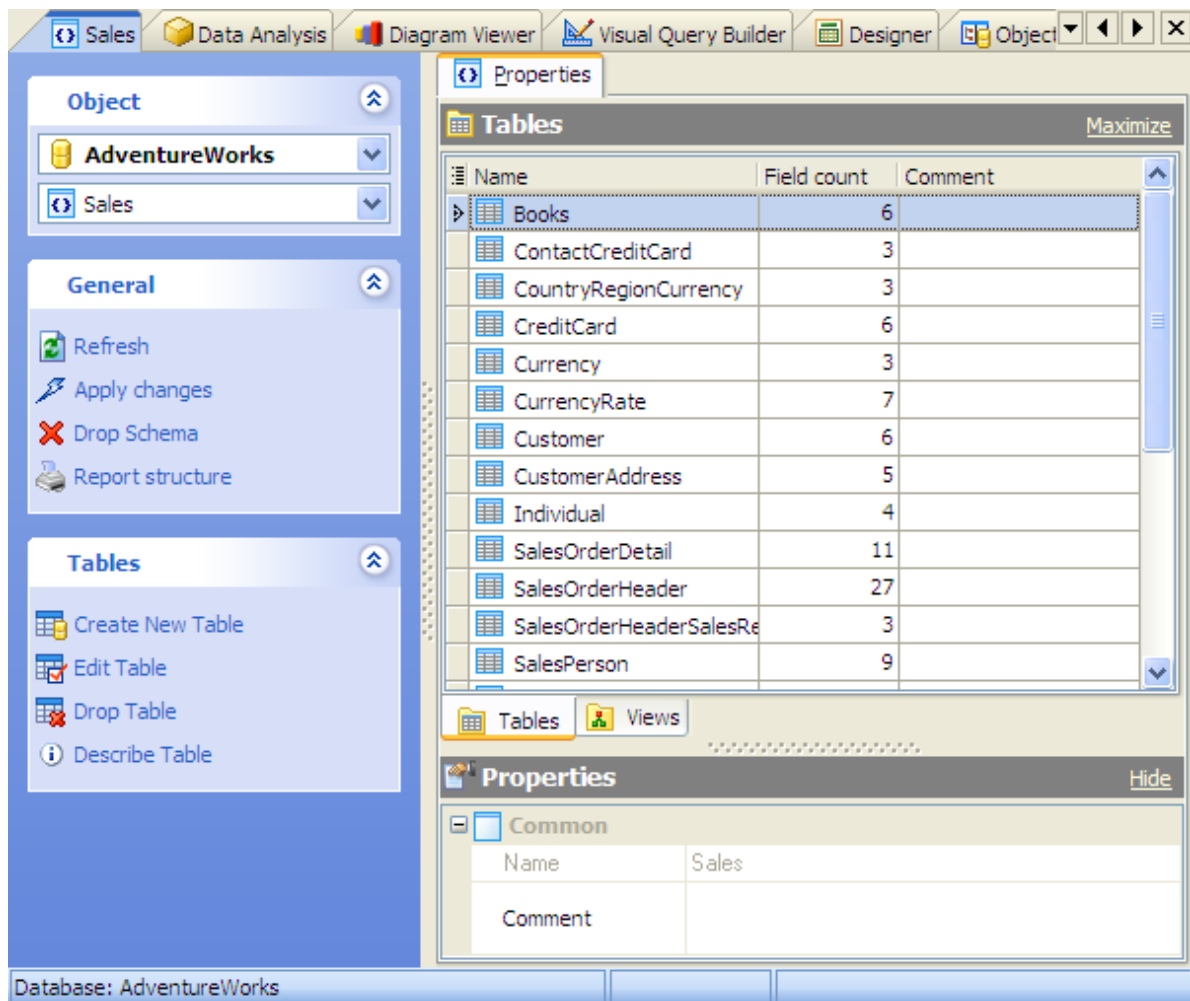

The **Properties** tab allows you to view schema options and to browse schema content divided into groups according to their types (*tables, views, etc.*). The popup menu of each tab allows you to create new, edit, copy or drop the appropriate schema object. The grid allows you to operate with several objects at a time. For this purpose select objects with the **Shift** or the **Ctrl** key pressed. After a group of objects is selected you can operate with them, e.g. *delete several objects* at once, as if it is a single object.

Name

Here you can view the schema name.

Use the **Comment** field to set the schema description.

To apply the changes, select the **Apply Changes** item in the **Navigation bar** or use **Ctrl + F9** or **Ctrl + F7** shortcut keys.

It is also possible to modify object properties without opening the object editor: use the **Object Properties** item of the popup menu of the selected object from the explorer tree.

5.2 Tables

AnySQL Maestro allows you to manipulate tables with easy: add new tables to the database, modify existing ones, browse table options and data. The sections below describe each of these actions in detail.

■ How can I add a new table?

New tables are created within [Create Table Wizard](#). In order to run the wizard you should either

- select the **Object | Create Database Object...** main menu item;
- select the **Table** icon in the **Create Database Object** dialog

or

- select the **Tables** list or any object from that list in the explorer tree;
- select the **Create New Table...** item from the popup menu.

To create a new table with the same properties as one of the existing tables has:

- select the **Object | Duplicate Database Object...** main menu item;
- follow the instructions of **Duplicate Object Wizard**.

■ How can I work with an existing table?

Tables can be edited within [Table Editor](#). In order to run the editor you should either

- select the table for editing in the explorer tree (type the first letters of the table name for quick search);
- select the **Edit Table...** item from the popup menu

or

- open **Schema (Database) Editor** and the **Tables** tab there;
- select the table to edit;
- press the **Enter** key or select the **Edit Table** item from the popup menu (alternatively, you may use the corresponding link of the **Navigation Bar**).

You can also view and edit table properties without launching **Table Editor**:

- select the table for editing in the explorer tree (type the first letters of the table name for quick search);
- select the **Table Properties...** item from the popup menu;
- edit table properties within the **Table Properties** dialog.

You can change the name of the table using the **Rename Table** dialog. To open the dialog you should either

- select the table to rename in the explorer tree;

- select the [Rename Table](#) item from the popup menu
- or
- open [Schema \(Database\) Editor](#) and the [Tables](#) tab there;
 - select the table to rename;
 - select the [Rename Table](#) item from the popup menu (alternatively, you may use the corresponding link of the [Navigation Bar](#)).

■ How can I drop the existing table?

To drop a table:

- select the table to drop in the explorer tree;
 - select the [Drop Table](#) item from the popup menu
- or
- open [Schema \(Database\) Editor](#) and the [Tables](#) tab there;
 - select the table to drop;
 - press the **Delete** key or select the [Drop Table](#) item from the popup menu (alternatively, you may use the corresponding link of the [Navigation Bar](#))

and confirm dropping in the dialog window.

5.2.1 Create Table Wizard

[Create Table Wizard](#) guides you through the process of creating a new database table. The basic principles of Create Object Wizards in AnySQL Maestro are explained in a [separate topic](#)^[34]. Below you will find a description of wizard steps that are unique for the current object.

Name

The name of the table being created as it was specified at the previous step.

Comment


Set the optional text to describe the new table.

Adding table subitems

On this step of the wizard you can fulfill the new table with fields, indexes, and foreign keys. To add a new object:

- Choose the necessary page ([Fields](#) - to add table fields, [Indexes](#) - table indexes, and so on);
- Follow the corresponding link of the tab's pop-up menu;
- Specify properties of the new object. To find the description of [field](#)^[64], [foreign_key](#)^[65], and [index](#)^[66], follow the according link.

The popup menu of each tab allows to edit, drop, reorder, and rename specified objects, etc.

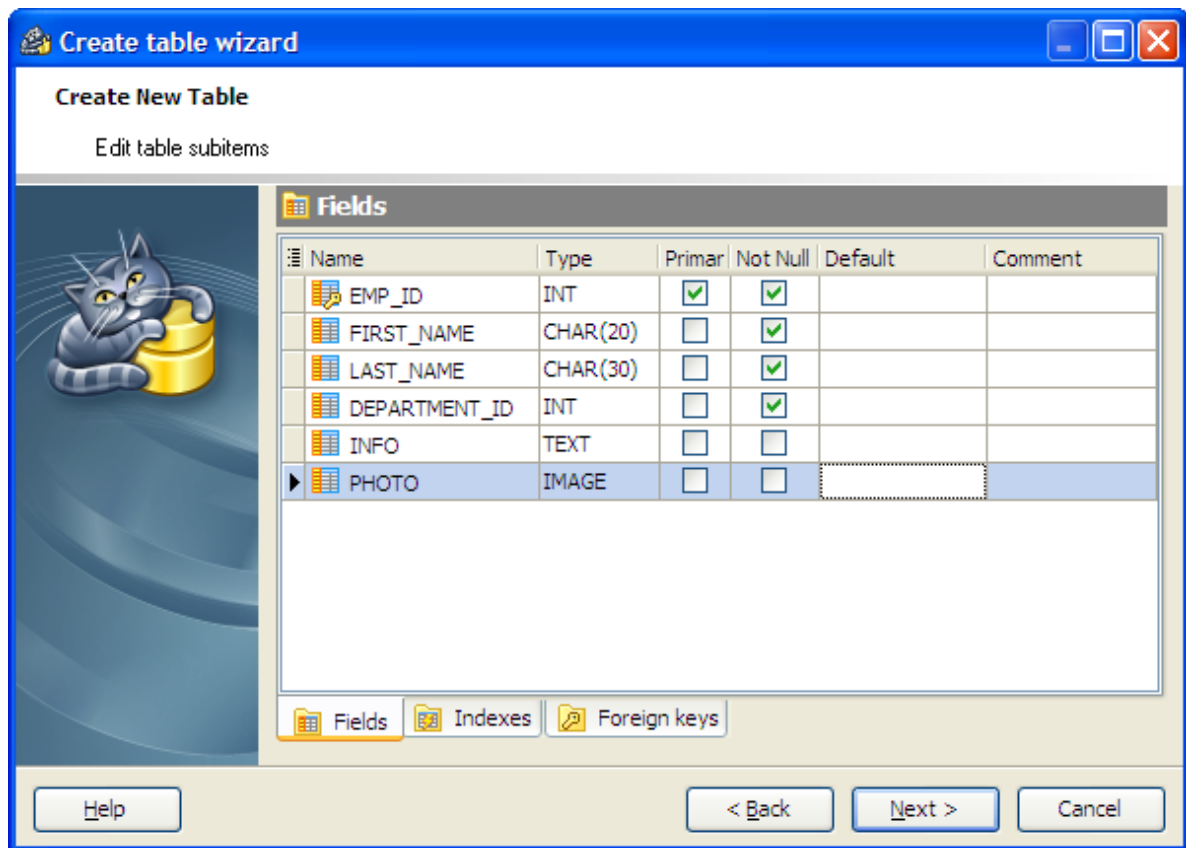

Click [Add All](#) or [Add](#) to include table(s) to table definition. Use the [Remove](#) or [Remove All](#) items to exclude table(s) from the list.

5.2.2 Table Editor


[Table Editor](#) allows you to create, edit and drop table fields, indexes, manage table data and other table subobjects. It can be opened automatically after the table is created and is available on editing the table. To open [Table Editor](#), double-click the corresponding node at the [Explorer Tree](#) or [Object Manager](#).

The basic principles of Object Editors in AnySQL Maestro are explained in a [separate topic](#). Below you will find a description of editor tabs that are unique for the current object.

- [Editing table properties](#)
- [Viewing table data](#)

5.2.2.1 Editing table properties

The [Properties](#) section allows you to view general table properties and also to modify .

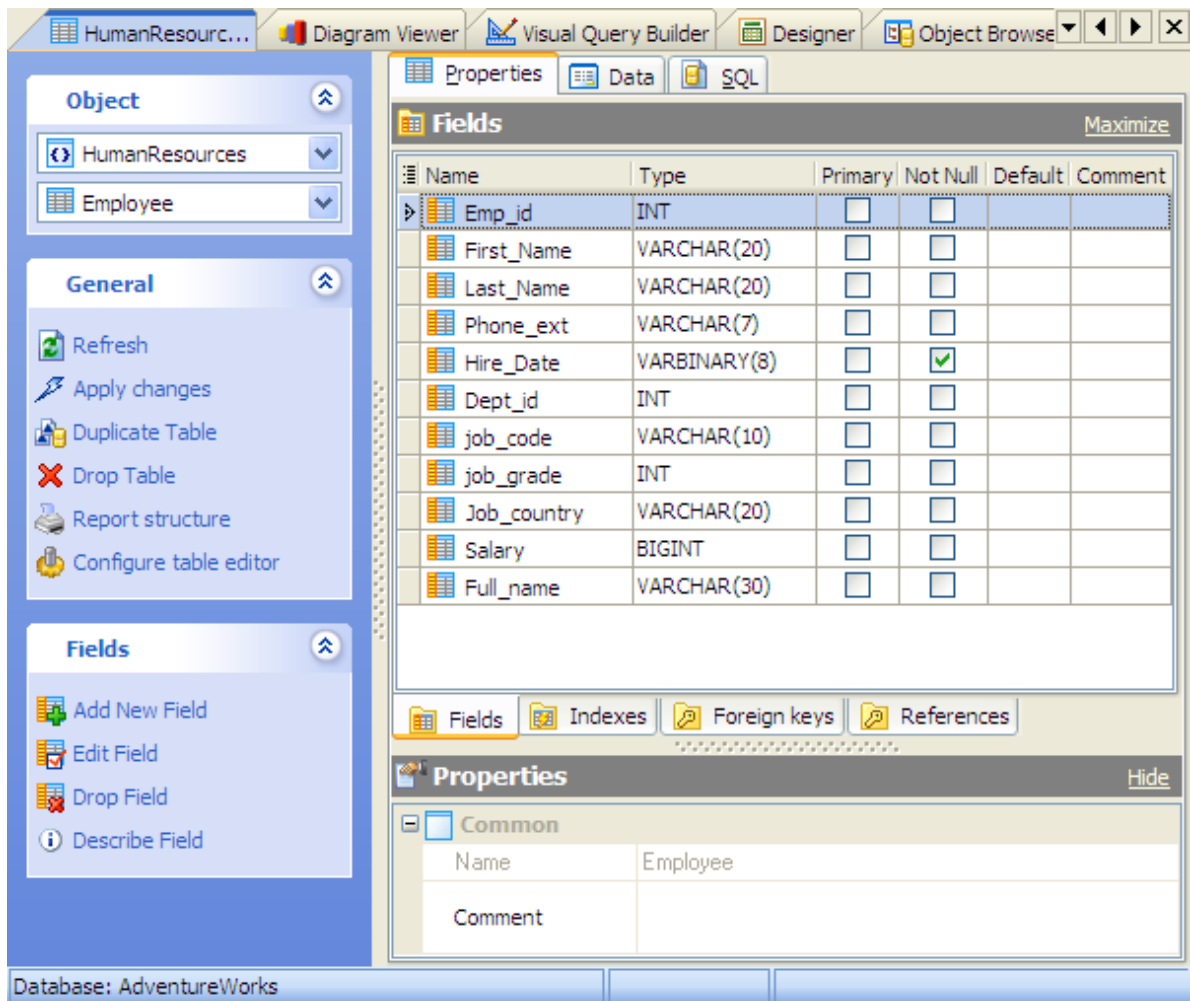

Subitems

Every tab is intended for work with defined **objects** (*fields, indexes, etc.*). To modify any object, double click it or use grid's popup menu. The menu also allows you to add new, rename, describe, copy/paste, and drop selected objects. To operate with several objects at a time, select them with the **Shift** or the **Ctrl** key pressed. After a group of objects is selected you can operate with it, e.g. *delete several objects at once*, as if it is a single object.

See also: [Fields](#)^[64], and [Indexes](#)^[66].

To apply the changes, select the **Apply Changes** item in the **Navigation bar** or use **Ctrl+F9** or **Ctrl+F7** shortcut keys.

It is also possible to modify object properties without opening the object editor: use the **Object Properties** item of the popup menu of the selected object from the explorer tree.

5.2.2.2 Managing table data

The **Data** tab displays the table data as a grid or as info cards (see [Data View](#)^[98] for details). To edit/add a table record, use **Data Input Form** or type the new data directly

in the grid (card). To export/import/get SQL dump of the table data, invoke corresponding modules from the grid's popup menu. To view and edit the content of BLOB columns, run [BLOB Editor](#)^[109].

Lookup editors

Lookup editor displays the content of parent table's columns within the drop-down window. AnySQL Maestro enables a lookup editor for a column linked by a foreign key with a single column from another table. To get the corresponding data, double click the field or use **F2** shortcut and press **Alt+Down Arrow Key**.

| 1 | 7 | LINDA | WILLIAMS | LINDA.WILLIAMS@sakilacustomer.org | 1 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|------------|--|----------------|----------|------------------------------------|---|------------|---------|----------|---------|-------------|---|----------------|----------|-----|-------|---|------------------|------------|-----|-------|---|-------------------|--------|----|-------|---|------------------|----------|-----|-------|---|-----------------|--------|-----|-------|----|---------------------------------|-------|-----|-------|----|------------------------------------|----------------|-----|-------|----|----------------|----------|-----|-------|
| 2 | 8 | BARBARA | JONES | BARBARA.JONES@sakilacustomer.org | 1 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 9 | ELIZABETH | BROWN | ELIZABETH.BROWN@sakilacustomer.org | 1 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 2 | <table><thead><tr><th>address_id</th><th>address</th><th>district</th><th>city_id</th><th>postal_code</th></tr></thead><tbody><tr><td>5</td><td>1913 Hanoi Way</td><td>Nagasaki</td><td>463</td><td>35200</td></tr><tr><td>6</td><td>1121 Loja Avenue</td><td>California</td><td>449</td><td>17886</td></tr><tr><td>7</td><td>692 Joliet Street</td><td>Attika</td><td>38</td><td>83579</td></tr><tr><td>8</td><td>1566 Inegl Manor</td><td>Mandalay</td><td>349</td><td>53561</td></tr><tr><td>9</td><td>53 Idfu Parkway</td><td>Nantou</td><td>361</td><td>42399</td></tr><tr><td>10</td><td>1795 Santiago de Compostela Way</td><td>Texas</td><td>295</td><td>18743</td></tr><tr><td>11</td><td>900 Santiago de Compostela Parkway</td><td>Central Serbia</td><td>280</td><td>93896</td></tr><tr><td>12</td><td>478 Joliet Way</td><td>Hamilton</td><td>200</td><td>77948</td></tr></tbody></table> | | | | | address_id | address | district | city_id | postal_code | 5 | 1913 Hanoi Way | Nagasaki | 463 | 35200 | 6 | 1121 Loja Avenue | California | 449 | 17886 | 7 | 692 Joliet Street | Attika | 38 | 83579 | 8 | 1566 Inegl Manor | Mandalay | 349 | 53561 | 9 | 53 Idfu Parkway | Nantou | 361 | 42399 | 10 | 1795 Santiago de Compostela Way | Texas | 295 | 18743 | 11 | 900 Santiago de Compostela Parkway | Central Serbia | 280 | 93896 | 12 | 478 Joliet Way | Hamilton | 200 | 77948 |
| address_id | address | district | city_id | postal_code | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 5 | 1913 Hanoi Way | Nagasaki | 463 | 35200 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 6 | 1121 Loja Avenue | California | 449 | 17886 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 7 | 692 Joliet Street | Attika | 38 | 83579 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 8 | 1566 Inegl Manor | Mandalay | 349 | 53561 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 9 | 53 Idfu Parkway | Nantou | 361 | 42399 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 10 | 1795 Santiago de Compostela Way | Texas | 295 | 18743 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 11 | 900 Santiago de Compostela Parkway | Central Serbia | 280 | 93896 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 12 | 478 Joliet Way | Hamilton | 200 | 77948 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 2 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 21 | DONNA | THOMPSON | DONNA.THOMPSON@sakilacustomer.org | 1 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |

Master-Detail Data View

To get data in the [master-detail](#) view mode (multiple detail pages are displayed for a single master row), use the [Show/Hide details](#) link at the editor's navigation bar. This mode allows you add/edit/delete data of detail pages. To open/close the appropriate detail page click the +/- icon or use +/- shortcuts.

| | | | | | | | |
|--|---|-------|----------------------------|-----------|-------|---------|-------|
| 6 | + | 710 | Mountain Bike Socks, L | SO-B909-L | White | 3,3963 | 9,5 |
| 7 | + | 711 | Sport-100 Helmet, Blue | HL-U509-B | Blue | 13,0863 | 34,99 |
| 8 | - | 712 | AWC Logo Cap | CA-1098 | Multi | 6,9223 | 8,99 |
| 1 SalesOrderDetail (ProductID) | | | | | | | |
| SalesOrderID SalesOrderDetailID OrderQty ProductID UnitPrice UnitPriceDisc | | | | | | | |
| Click here to define a filter | | | | | | | |
| 1 | | 71938 | 113283 | 1 | 712 | 5,394 | |
| 2 | | 71897 | 112902 | 4 | 712 | 5,394 | |
| 3 | | 71858 | 112375 | 3 | 712 | 5,394 | |
| 4 | | 71902 | 112962 | 3 | 712 | 5,394 | |
| 5 | | 71797 | 111053 | 6 | 712 | 5,394 | |
| 6 | | 71816 | 111457 | 4 | 712 | 5,394 | |
| 7 | | 71784 | 110761 | 10 | 712 | 5,394 | |
| 8 | | 71783 | 110748 | 11 | 712 | 5,2142 | |
| 9 | | 71782 | 110670 | 10 | 712 | 5,394 | |
| 9 | + | 713 | Long-Sleeve Logo Jersey, S | LJ-0192-S | Multi | 38,4923 | 49,99 |
| 10 | + | 714 | Long-Sleeve Logo Jersey, M | LJ-0192-M | Multi | 38,4923 | 49,99 |
| 11 | + | 715 | Long-Sleeve Logo Jersey, L | LJ-0192-L | Multi | 38,4923 | 49,99 |

Import from Clipboard

AnySQL Maestro supports data import from clipboard. It is supposed that columns within the data block are separated by the tabulation symbol, records are separated by newlines and the first line of the data block contains column headers.

Example:

ColHeader1 ColHeader2

R1C1 R1C2

R2C1 R2C2

The same data format is supported by a lot of other applications, so the ability allows you to copy data from MS Excel, another table or view, or even from a data set from a different DBMS especially if it is opened with an appropriate our product.

Uploading files as BLOBs

AnySQL Maestro allows you to upload files as BLOBs into a table. For this purpose the file names must contain the information on the record they need to be placed to: the files need to be named in the same manner and include content of one or several table columns that can uniquely identify each row. To import files, specify the file name template using file name tags (i.e. %id%, %user%, where 'id' and 'user' are the fact table columns). You can also set the default file to be uploaded to NULL fields.

Example:

Suppose we have a table 'employee' with Non-Blob data as follows:

Id User

1 Max

2 July

And we need to import the 1.jpg and 2.jpg files to a BLOB column of the table. The files are stored in the "D:\Images" directory. In this case we need to specify the "D:\Images\%Id%.jpg" file name template.

5.2.3 Fields

Table columns are created and edited within the [Field Editor](#).

■ How to add a new column to a table?

To add a new table column, you should either:

- open the table in [Table Editor](#) and the [Fields](#) tab there;
- press the **Insert** key or select the [Add New Field...](#) item from the popup menu (alternatively, you may use the corresponding link of the [Navigation Bar](#))

or

- select the table in the explorer tree and use the [Create New Field](#) popup menu item

or

- select the table [Fields](#) node or any field within the table in the explorer tree and use the [Add New Field...](#) popup menu item.

■ How to edit an existing table field?

Table fields are edited within the [Field Editor](#)⁶⁴ dialog window. In order to open the dialog you should either

- open the table in [Table Editor](#) and the [Fields](#) tab there;
- press the **Enter** key or select the [Edit Field](#) item from the popup menu (alternatively, you may use the corresponding link of the [Navigation Bar](#))

or

- select the field to edit in the explorer tree and use the [Edit Field](#) popup menu item.

You can change the name of the field using the [Rename Field](#) dialog. To open the dialog you should either

- select the field to rename in the explorer tree;
- select the [Rename Field](#) item from the popup menu


or

- open the table in [Table Editor](#) and the [Fields](#) tab there;
- select the field to rename;
- select the [Rename Field](#) item from the popup menu (alternatively, you may use the corresponding link of the [Navigation Bar](#)).

■ How to drop an existing table field?

To drop the table field:

- select the field to drop in the explorer tree;
 - select the [Drop Field](#) item from the popup menu
- or
- open the table in Table Editor and the [Fields](#) tab there;
 - press the **Delete** key or select the [Drop Field](#) item from the popup menu (alternatively, you may use the corresponding link of the [Navigation Bar](#))
- and confirm dropping in the dialog window.

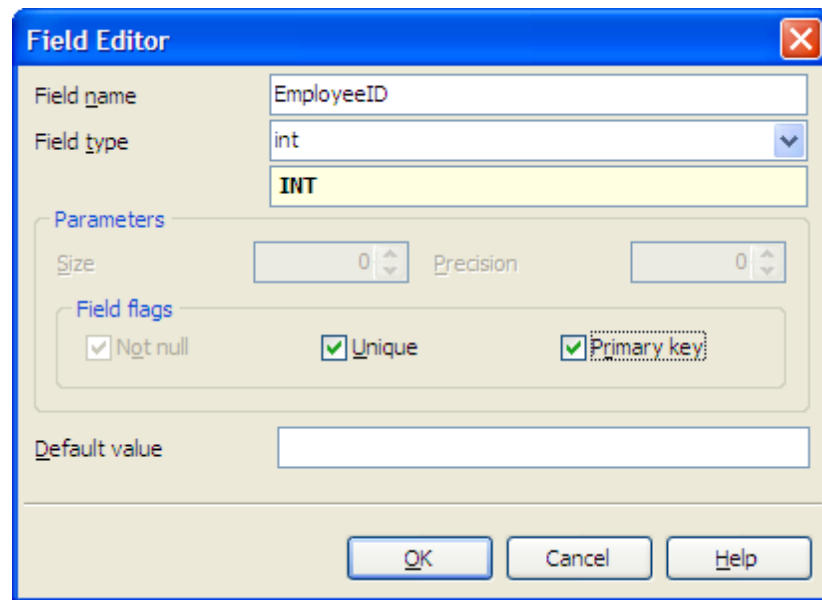The image shows a 'Field Editor' dialog box with a blue title bar and a close button (X) in the top right corner. The dialog is divided into several sections. The top section has two text boxes: 'Field name' containing 'EmployeeID' and 'Field type' containing 'int'. Below 'Field type' is a yellow-highlighted box containing 'INT'. The middle section is titled 'Parameters' and contains two spin boxes: 'Size' set to '0' and 'Precision' set to '0'. Below these is a 'Field flags' section with three checked checkboxes: 'Not null', 'Unique', and 'Primary key'. The bottom section has a 'Default value' text box which is empty. At the very bottom are three buttons: 'OK', 'Cancel', and 'Help'.

To specify the [Data Type](#), select it from the drop-down list.

Note: the name of the object must be unique among all the object names in the table. You can use any identifier that is allowed by database server.

Parameters

Use the [Size](#) edit box to define the length of the field value for integer, float, char and other data types and use [Precision](#) to define the precision of the field value, e.g. for *float* data type.

Field flags

☒ Not Null

Forbids the NULL values for the field.

☒ Unique

Includes the field into the unique key (index).

☒ Primary Key

With this option checked the field becomes the only field with a primary key. If you check this field, you will not be able to set this attribute for any other field in the table. Hence if you want to create a compound primary key, do not check this field but create

a primary key through the Indexes tab of [Table Editor](#) or the appropriate step of [Create Table Wizard](#).

Default value

Within the box you can assign a default value for the field column. The action is optional. If the default value was specified during the new row created and no values is specified for some of the columns, the columns will be filled with their respective default values.

The [Comment](#) box allows you to set optional text describing the field.

5.2.4 Indexes

[Indexes](#) are primarily used to enhance database performance (though inappropriate use may result in slower performance). The key field(s) for the index are specified as column names. Multiple fields can be specified if the index method supports multicolumn indexes.

■ How can I create a table index?

Table indexes are created within the [Index Properties](#) dialog window. In order to open the dialog you should either

- open the table in [Table Editor](#) and the [Indexes](#) tab there;
- press the **Insert** key or select the [Add New Index...](#) item from the popup menu (alternatively, you may use the corresponding link of the [Navigation Bar](#))

or

- select the table in the explorer tree and use the [Create New Index](#) popup menu item

or

- select the table [Indexes](#) node or any index within the table in the explorer tree and use the [Add New Index...](#) popup menu item.

■ How can I edit an existing index?

Table indexes are edited within the [Index Properties](#) dialog window. In order to open the dialog you should either

- open the table in [Table Editor](#) and the [Indexes](#) tab there;
- press the **Enter** key or select the [Edit Index](#) item from the popup menu (alternatively, you may use the corresponding link of the [Navigation Bar](#))

or

- select the index to edit in the explorer tree and use the [Edit Index](#) popup menu item.

You can change the name of the index using the [Rename Index](#) dialog. To open the dialog you should either

- select the index to rename in the explorer tree;
- select the [Rename Index](#) item from the popup menu

or

- open the table in [Table Editor](#) and the [Indexes](#) tab there;
- select the index to rename;
- select the [Rename Index](#) item from the popup menu (alternatively, you may use the corresponding link of the [Navigation Bar](#)).

■ How can I drop a table index?


To drop the table index:

- select the index to drop in the explorer tree;
- select the [Drop Index](#) item from the popup menu

or

- open the table in [Table Editor](#) and the [Indexes](#) tab there;
- press the **Delete** key or select the [Drop Index](#) item from the popup menu (alternatively, you may use the corresponding link of the [Navigation Bar](#))

and confirm dropping in the dialog window.

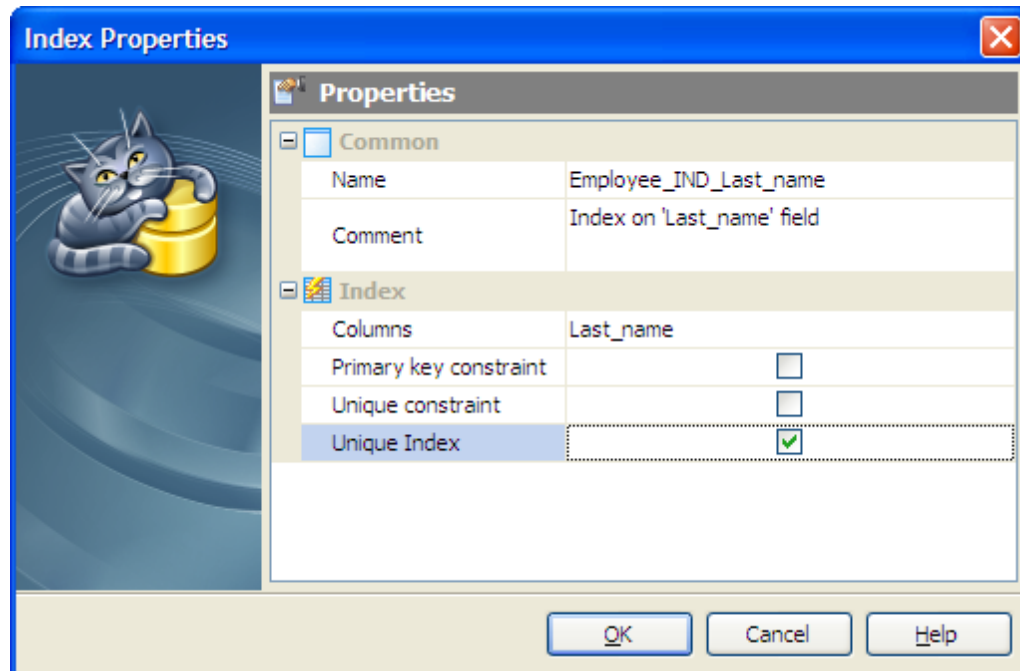

Use the [Columns](#) drop-down list to select a key field(s) for the index.

☑ Primary key constraint

With this option checked this field becomes a compound primary key. It is useful in case the table has more than one primary key.

Unique constraint

Check the option to permit no duplicate values. A unique column must also define the NOT NULL attribute. A table can have one or more unique keys.

Unique Index


If checked, creates a unique index for the table, i.e. the database system ensures that no two rows of the specified table have the same values in the indexed columns. In this way, if two rows both contain the NULL value for all columns of an index, the two index values are not considered to be identical. If at least one column does not contain the NULL value, two rows that have the same value in all non-NULL columns are considered to be identical.

5.2.5 Foreign Keys

A foreign key is a field (or collection of fields) in one table that uniquely identifies a row of another table. In other words, a foreign key is a column or a combination of columns that is used to establish and enforce a link between the data in two tables.

Note: To create a foreign key constraint, it is necessary to have this privilege for both the referencing and referenced tables.

How can I add a new foreign key?

Foreign keys are created within the [Foreign Key Properties](#)  dialog window. In order to open the dialog you should either

- open the table in [Table Editor](#) and the [Foreign Keys](#) tab there;
- press the **Insert** key or select the [Add New Foreign Key...](#) item from the popup menu (alternatively, you may use the corresponding link of the [Navigation Bar](#))


or

- select the table in the explorer tree and use the [Create New Foreign Key](#) popup menu item

or

- select the table [Foreign Keys](#) node or any foreign key within the table in the explorer tree and use the [Add New Foreign Key...](#) popup menu item.

How can I edit an existing foreign key?

Foreign Keys are edited within the [Foreign Key Properties](#)  dialog window. In order to open the dialog you should either

- open the table in [Table Editor](#) and the [Foreign Keys](#) tab there;
- press the **Enter** key or select the [Edit Foreign Key](#) item from the popup menu (alternatively, you may use the corresponding link of the [Navigation Bar](#))

or

- select the foreign key to edit in the explorer tree and use the [Edit Foreign Key](#) popup menu item.

You can change the name of the foreign key using the [Rename Foreign Key](#) dialog. To open the dialog you should either

- select the foreign key to rename in the explorer tree;
- select the [Rename Foreign Key](#) item from the popup menu

or

- open the table in [Table Editor](#) and the [Foreign Keys](#) tab there;
- select the foreign key to rename;
- select the [Rename Foreign Key](#) item from the popup menu (alternatively, you may use the corresponding link of the [Navigation Bar](#)).

■ How can I drop a foreign key?

To drop the foreign key:


- select the foreign key to drop in the explorer tree;
- select the [Drop Foreign Key](#) item from the popup menu

or

- open the table in [Table Editor](#) and the [Foreign Keys](#) tab there;
- press the **Delete** key or select the [Drop Foreign Key](#) item from the popup menu (alternatively, you may use the corresponding link of the [Navigation Bar](#))

and confirm dropping in the dialog window.


Set the Foreign Key [Name](#), select [Columns](#) from the [Available Fields](#) list to include into the foreign key, select the Foreign Table [Name](#) from the drop-down list and its fields from the list to include, set other foreign key properties and apply the changes by clicking the [OK](#) button.

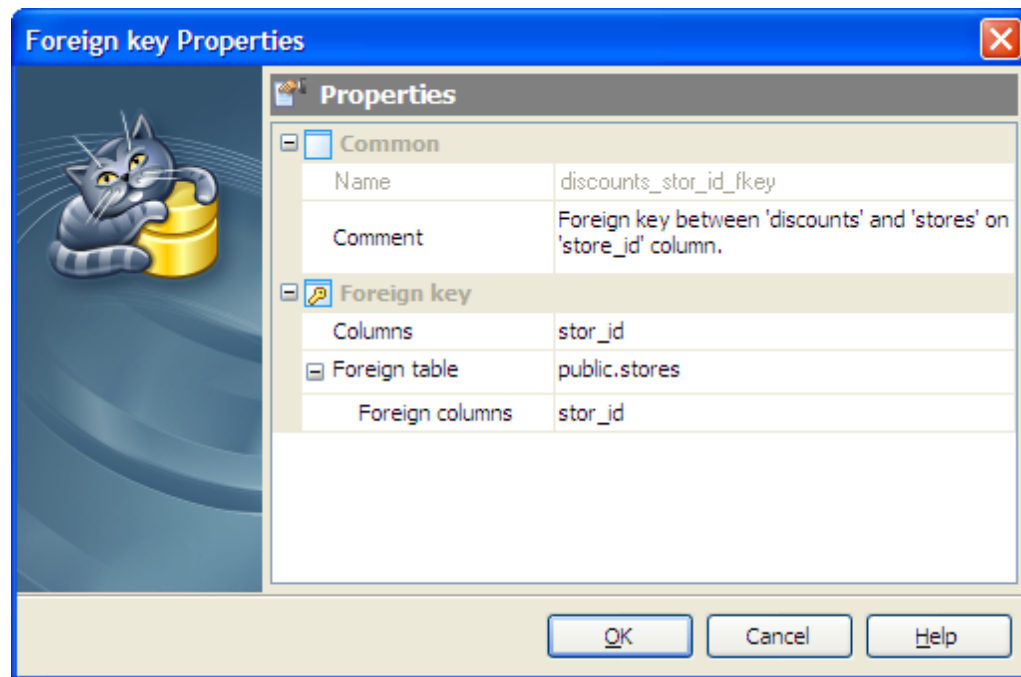

All the fields which are included into the Foreign Key must be included into indexes as well. See [Indexes](#) for details.

5.2.6 Foreign Key References

A foreign key specifies that the values in a column (or a group of columns) must match the values appearing in some row of another table. The [Foreign Key References](#) tab allows you to manage foreign keys created in other tables and reference for columns of the current one. Table objects are managed within the corresponding tab of [Table Editor](#). Unlike *tables* or *views*, Foreign Key References are actually not database objects. These are only references to foreign keys. They are designed specially for easy foreign keys management.

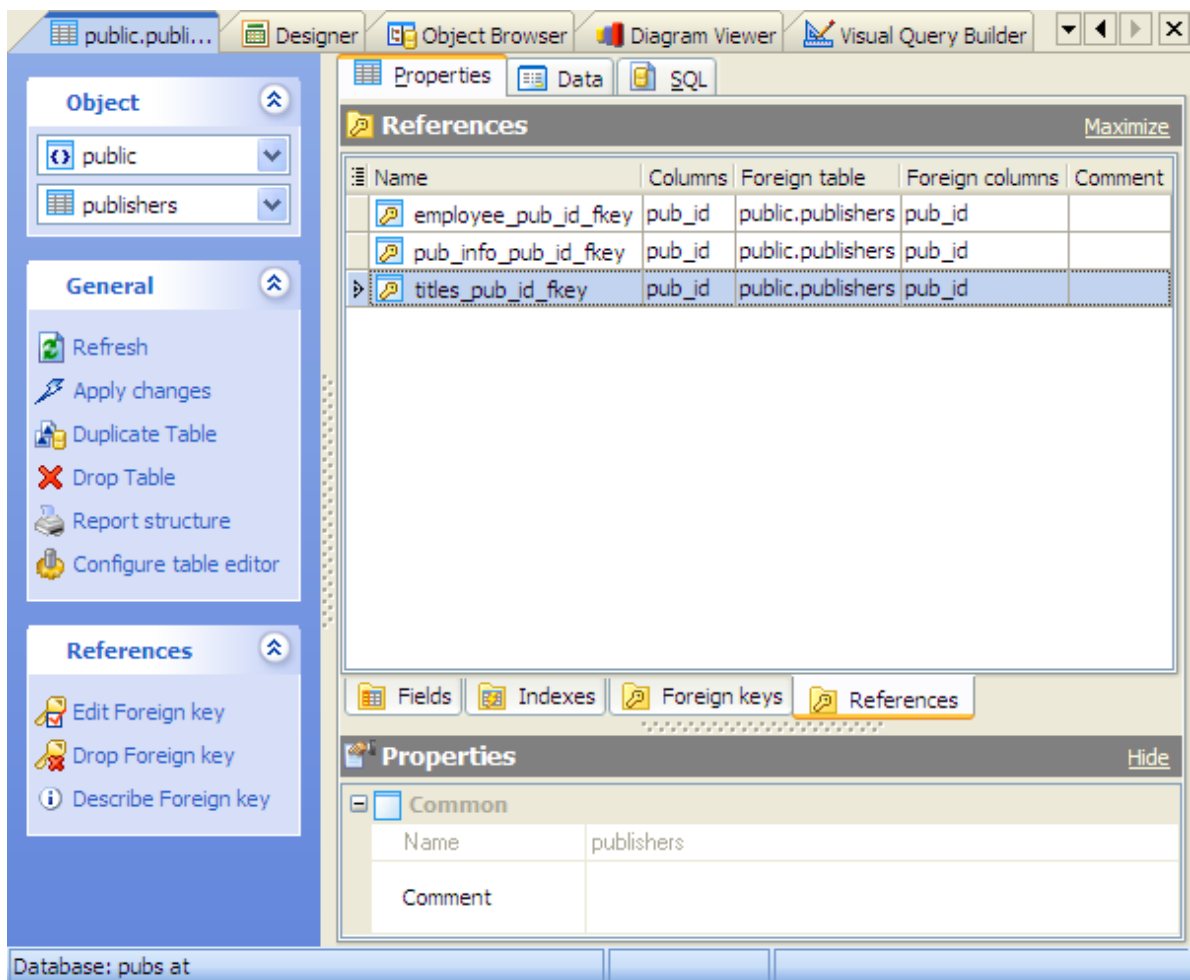

See also: [Foreign Keys](#)

■ How can I add a new foreign key reference?

Table foreign key references are edited within the [Foreign Key Editor](#) dialog window. In order to open the dialog you should either

- open the table in [Table Editor](#);
- open the [Subitems](#) item and the [Foreign Keys References](#) tab there;
- press **Enter** key or select the [Edit Foreign Key](#) item from the popup menu

or

- select the foreign key to edit in the appropriate table group of the explorer tree and use the [Edit Foreign Key](#) popup menu item.

■ How can I edit an existing foreign key reference?

Table foreign key references are edited within the [Foreign Key Editor](#) dialog window. In order to open the dialog you should either

- open the table in [Table Editor](#);
- open the [Subitems](#) item and the [Foreign Keys References](#) tab there;
- press **Enter** key or select the [Edit Foreign Key](#) item from the popup menu

or

- select the foreign key to edit in the appropriate table group of the explorer tree and use the [Edit Foreign Key](#) popup menu item.

■ **How can I drop a foreign key reference?**

To drop the foreign key reference:

- open the table in [Table Editor](#);
- open the [Subitems](#) item and the [Foreign Keys References](#) tab there;
- press **Delete** key or select the [Drop Foreign Key](#) item from the popup menu;

or

- select the foreign key to drop in the appropriate table group of the explorer tree and use the [Drop Foreign Key](#) popup menu item.

and confirm dropping in the dialog window.

5.3 Views

Views are useful for allowing users to access a set of relations (tables) as if it were a single table, and limiting their access to just that. Views can also be used to restrict access to rows (a subset of a particular table).

■ How can I create a new view?

New views are created within [Create View Wizard](#)^[74]. In order to run the wizard you should either

- select the **Object | Create Database Object...** main menu item;
 - select the **View** icon in the **Create Database Object** dialog
- or
- select the **Views** list or any object from that list in the explorer tree;
 - select the **Create New View...** item from the popup menu
- or
- open **Schema (Database) Editor** and the **Views** tab there;
 - press the **Insert** key or select the **Create New View** item from the popup menu (alternatively, you may use the corresponding link of the **Navigation Bar**).

To create a new view with the same properties as one of the existing views has:

- select the **Object | Duplicate Database Object...** main menu item.
- follow the instructions of **Duplicate Object Wizard**.

■ How can I edit an existing view definition?

Views can be edited within [View Editor](#)^[75]. In order to run the editor you should either

- select the view for editing in the explorer tree (type the first letters of the view name for quick search);
 - select the **Edit View...** item from the popup menu
- or
- open **Schema (Database) Editor** and the **Views** tab there;
 - select the view to edit;
 - press the **Enter** key or select the **Edit View** item from the popup menu (alternatively, you may use the corresponding link of the **Navigation Bar**).

You can change the name of the view using the **Rename View** dialog. To open the dialog you should either

- select the view to rename in the explorer tree;
 - select the **Rename View** item from the popup menu
- or
- open **Schema (Database) Editor** and the **Views** tab there;

- select the view to rename;
- select the [Rename View](#) item from the popup menu (alternatively, you may use the corresponding link of the [Navigation Bar](#)).

📌 **How can I drop a view?**

To drop a view:

- select the view to drop in the explorer tree;
- select the [Drop View](#) item from the popup menu

or

- open [Schema \(Database\) Editor](#) and the [Views](#) tab there;
- select the view to drop;
- press the **Delete** key or select the [Drop View](#) item from the popup menu (alternatively, you may use the corresponding link of the [Navigation Bar](#))

and confirm dropping in the dialog window.


5.3.1 Create View Wizard

[Create View Wizard](#) guides you through the process of creating a new view. See [How To Create View](#)^[73] to learn how to run this wizard.

The basic principles of Create Object Wizards in AnySQL Maestro are explained in a [separate topic](#)^[34]. Below you will find a description of wizard steps that are unique for the current object.

Selecting fields for a new view

Select a table or a view from the [Based on](#) drop-down menu. Then specify which fields will be used in the new view. Use [Add All](#) or [Add Selected](#) buttons to include field(s) into view definition. Use the [Remove Selected](#) or [Remove All](#) items to exclude field(s) from the view's field list. Click the [Next](#) button to proceed.

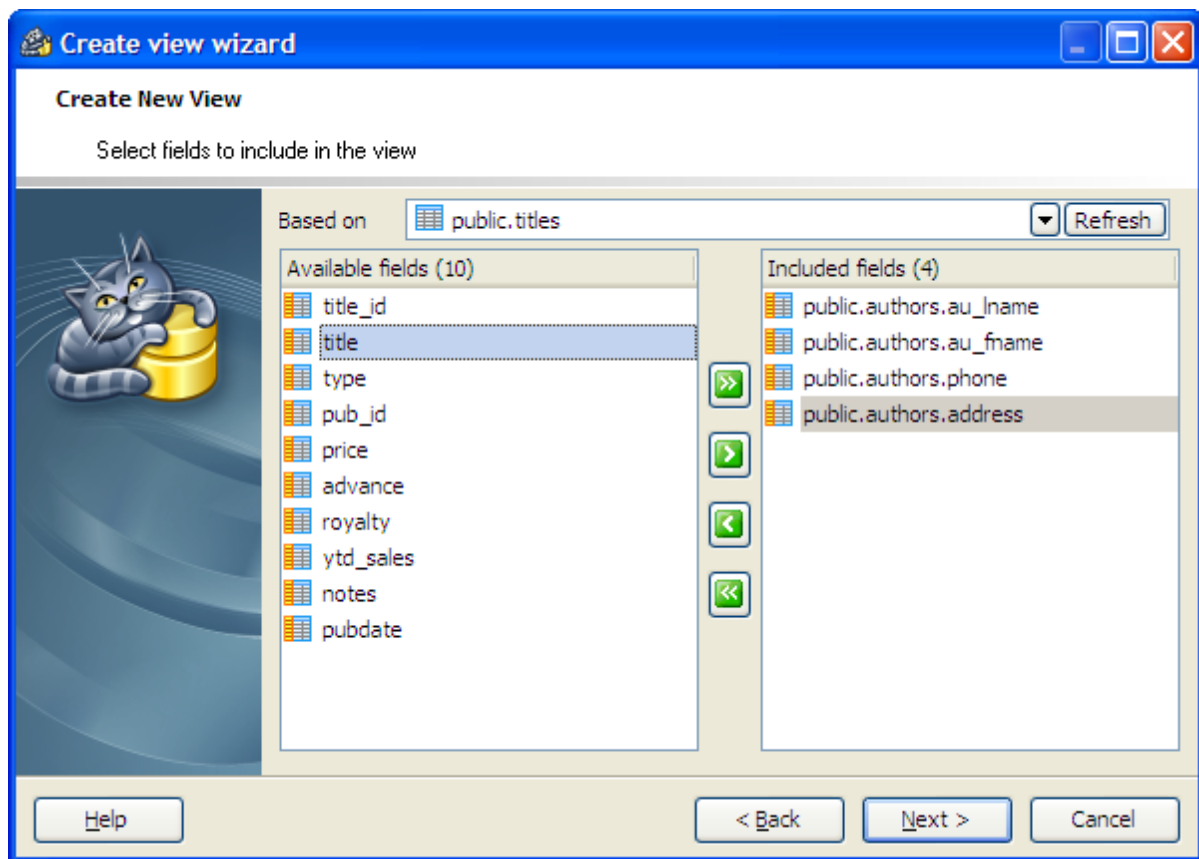


Specifying the WHERE condition

AnySQL Maestro provides the [Filter Builder](#) dialog to facilitate a creating of the WHERE condition.


■ Adding a new condition to the filter

Suppose we need to select orders from the sample table *Orders* made between 01.02.2010 and 10.02.2010. These criteria are applied to the *OrderDate* column. Press the button to add this condition. Alternatively, you can use the [Filter](#) button and select the [Add Condition](#) option from the drop-down menu.

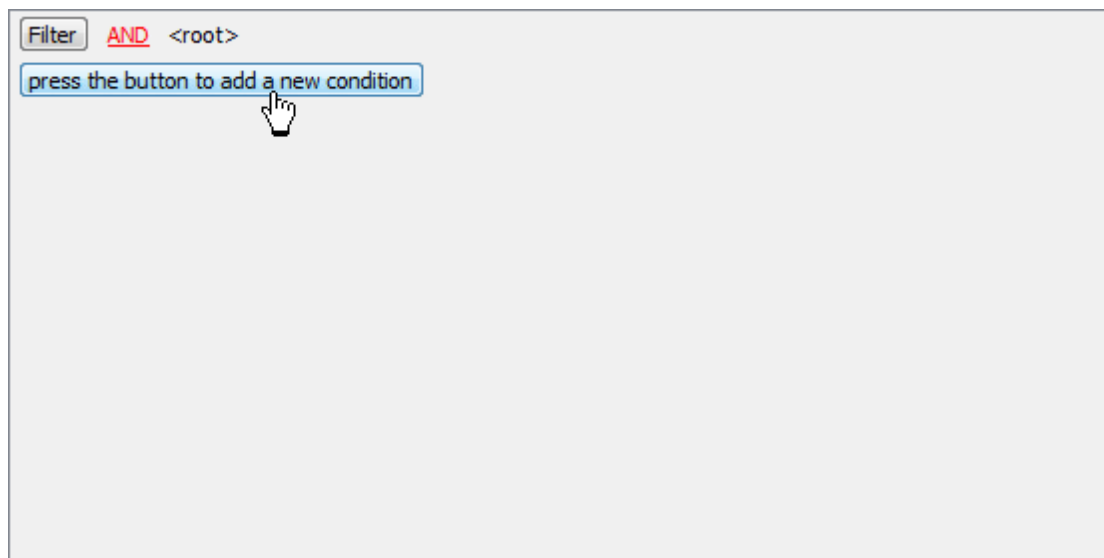


■ Setting a filter criteria in the condition

Select the *OrderDate* column in the drop-down list of the available columns.

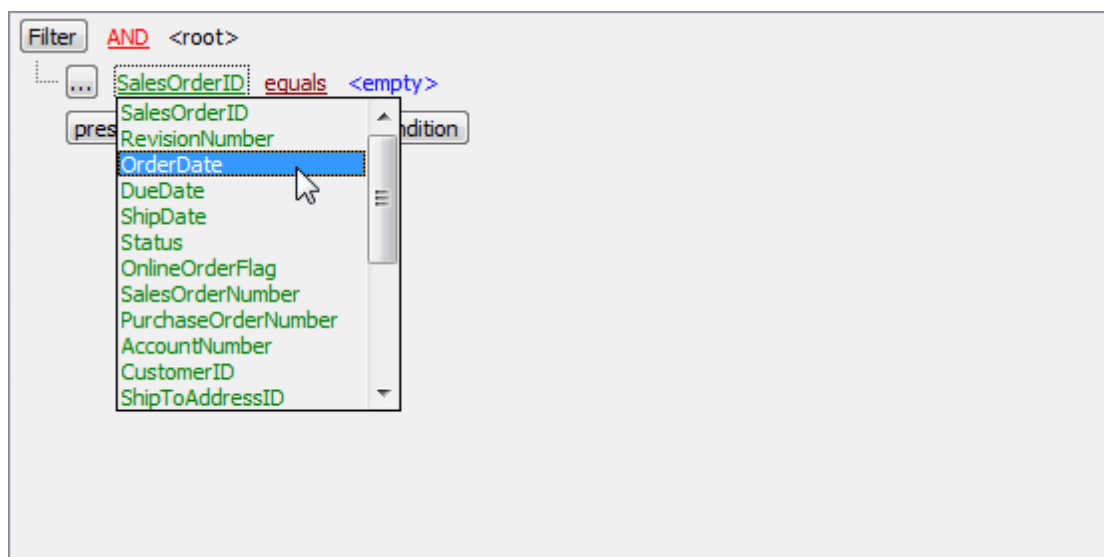

■ Setting an operator in the condition

Set the proper operator. In our example it is BETWEEN.

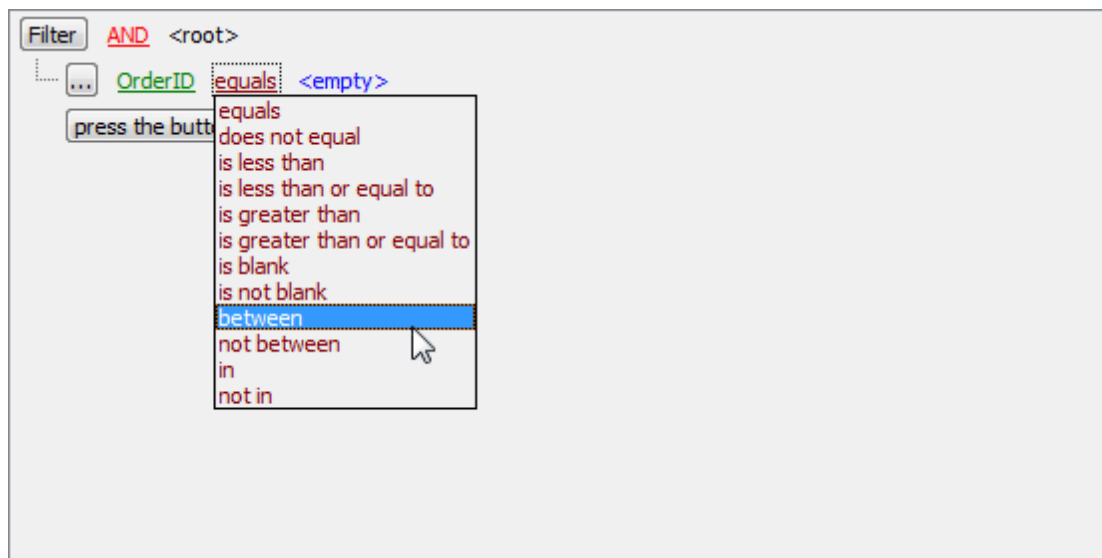

■ Setting criteria values in the condition

Next, you need to specify the range values for the selected operator. The editor used in value boxes is determined by the editor type assigned to the corresponding column.




Now use the [Apply](#) button to see the filter result.

You can add additional conditions to the same root level to be combined by the AND operator.


■ Adding a new group

Suppose we need to select orders made between 01.02.2010 and 10.02.2010 and paid via 'Visa' or 'American Express'. This is a complex filter condition combining

two simple conditions with the OR operator. Conditions from the same root level are combined by the AND operator. To add a condition combined with the previous one with the OR (NOT AND, NOT OR) operator, use a new group of conditions.

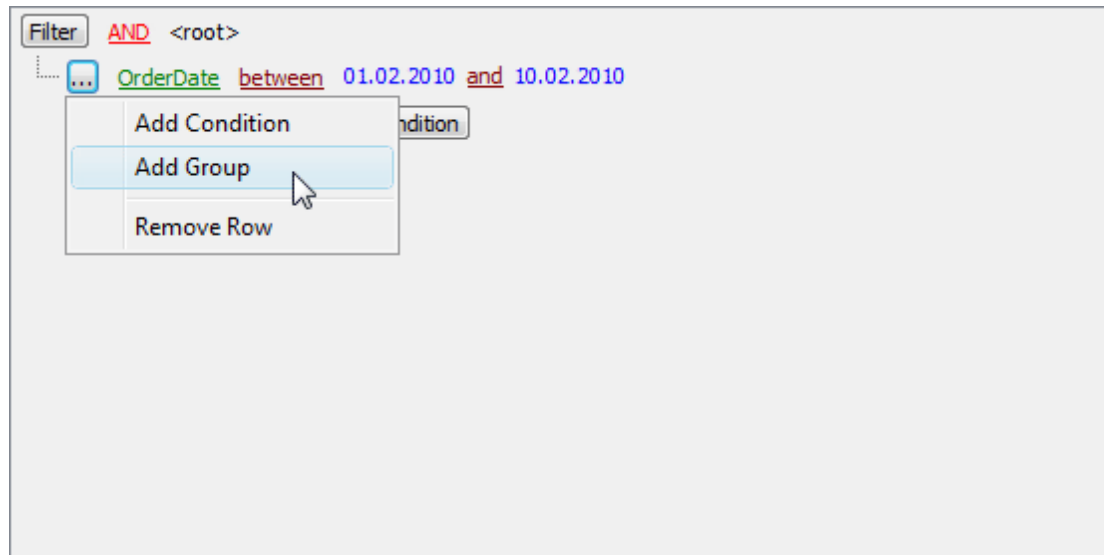

The next screen represents the finished filter conditions for this example.

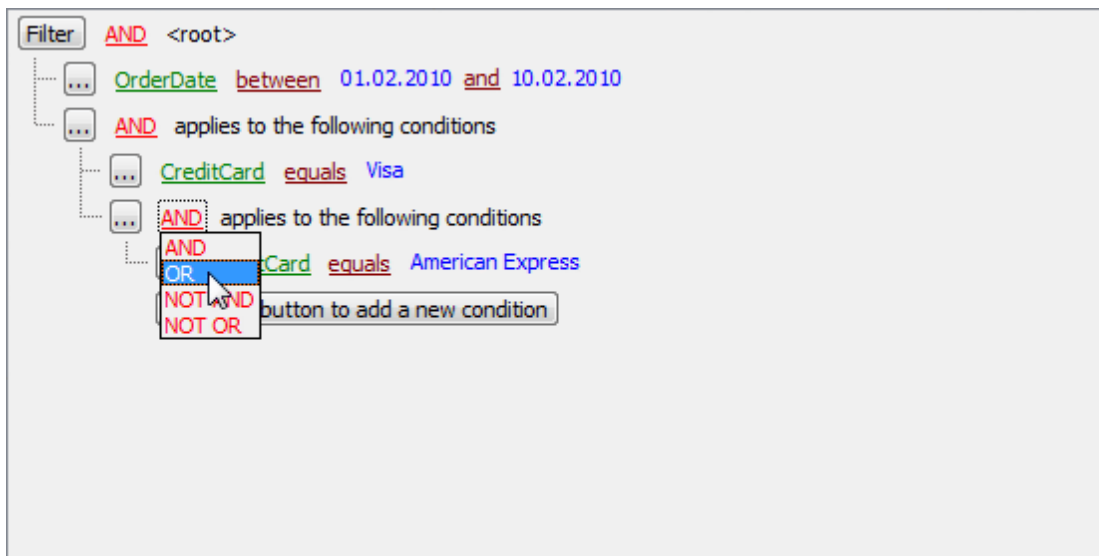

5.3.2 View Editor


View Editor allows you to edit the existing view definition (view name and the SELECT statement it implements).

The basic principles of Object Editors in AnySQL Maestro are explained in a [separate topic](#)³⁷. Below you will find a description of editor tabs that are unique for the current object.

- [Editing view properties](#)⁷⁹

- [Viewing data](#)⁸⁰

See also: [Create View Wizard](#)⁷⁴

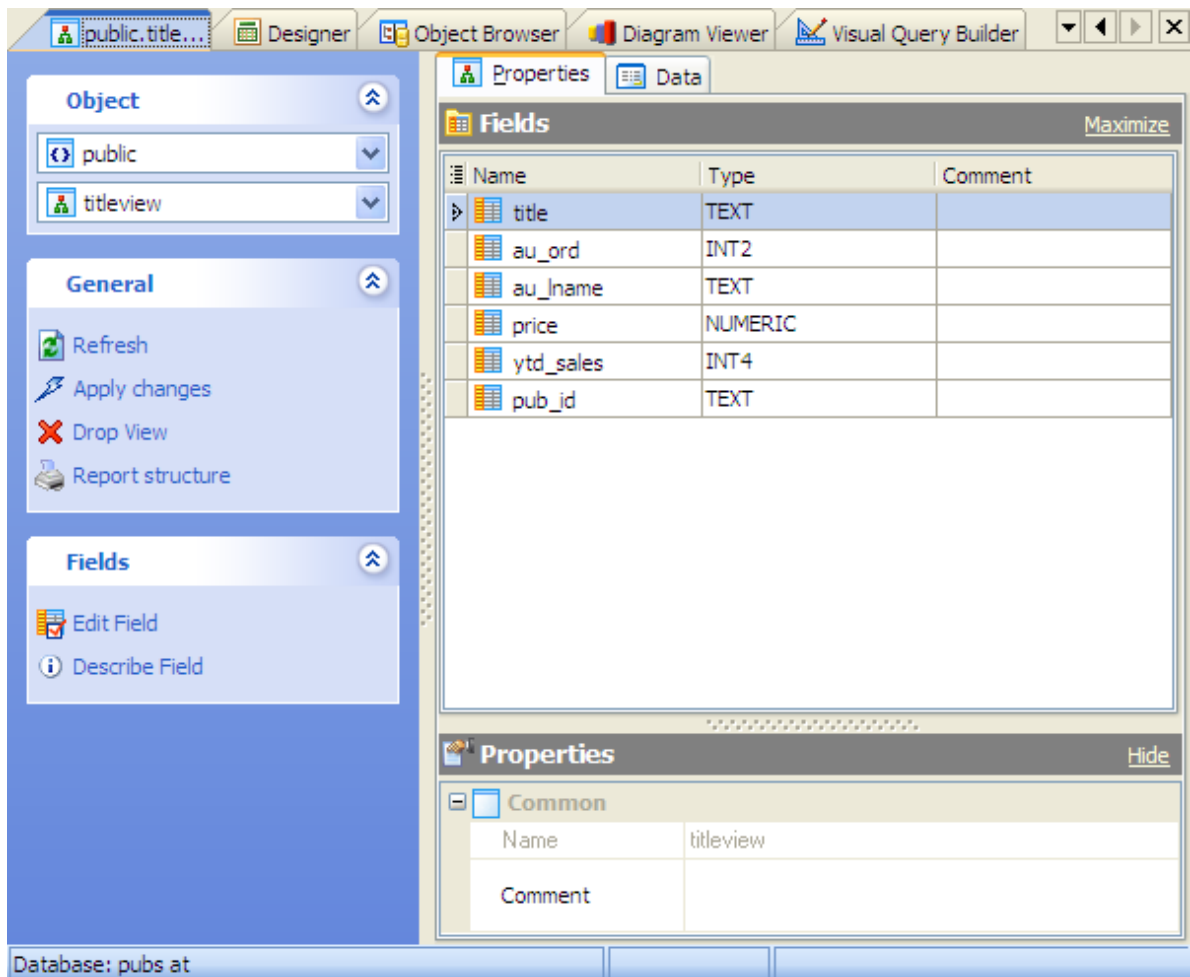

5.3.2.1 Editing view properties

View Editor provides you with an ability to edit view properties. The **Properties** tab allows you to change the view name.

Subitems

Every tab is intended for managing some view **subitems** (e.g. database provides only the one view subitem type - *fields*). Each object can be opened in its editor. Use grid's popup menu to create new, edit or drop the selected view subitems. Using the popup menu you can also copy the selected objects to clipboard or paste previously copied objects.

You can operate on several objects at a time. For this you have to select view objects with the **Shift** or the **Ctrl** key pressed. After a group of objects is selected you can operate on it, e.g. *delete several objects at once*, as if it were a single object.

See also: [Fields](#)⁶⁴

Note: the name of the object must be unique among all the object names in its


container. Moreover, all the objects that are source of data need unique names among themselves. You can use any identifier that is allowed by database server.

To apply the changes, select the [Apply Changes](#) item in the [Navigation bar](#) or use **Ctrl+F9** or **Ctrl+F7** shortcut keys.

It is also possible to modify object properties without opening the object editor: use the [Object Properties](#) item of the popup menu of the selected object from the explorer tree.

5.3.2.2 Viewing data

The [Data](#) tab displays the data represented in the view as a grid (see [Data View](#) for details). The popup menu of this tab and the Data Management navigation bar allow you to export data, get SQL dump, set the value of the selected record to *Null* or to *Now* (for [Date](#) values). In tables with BLOB fields you can also call BLOB Editor to view and edit the BLOB fields.

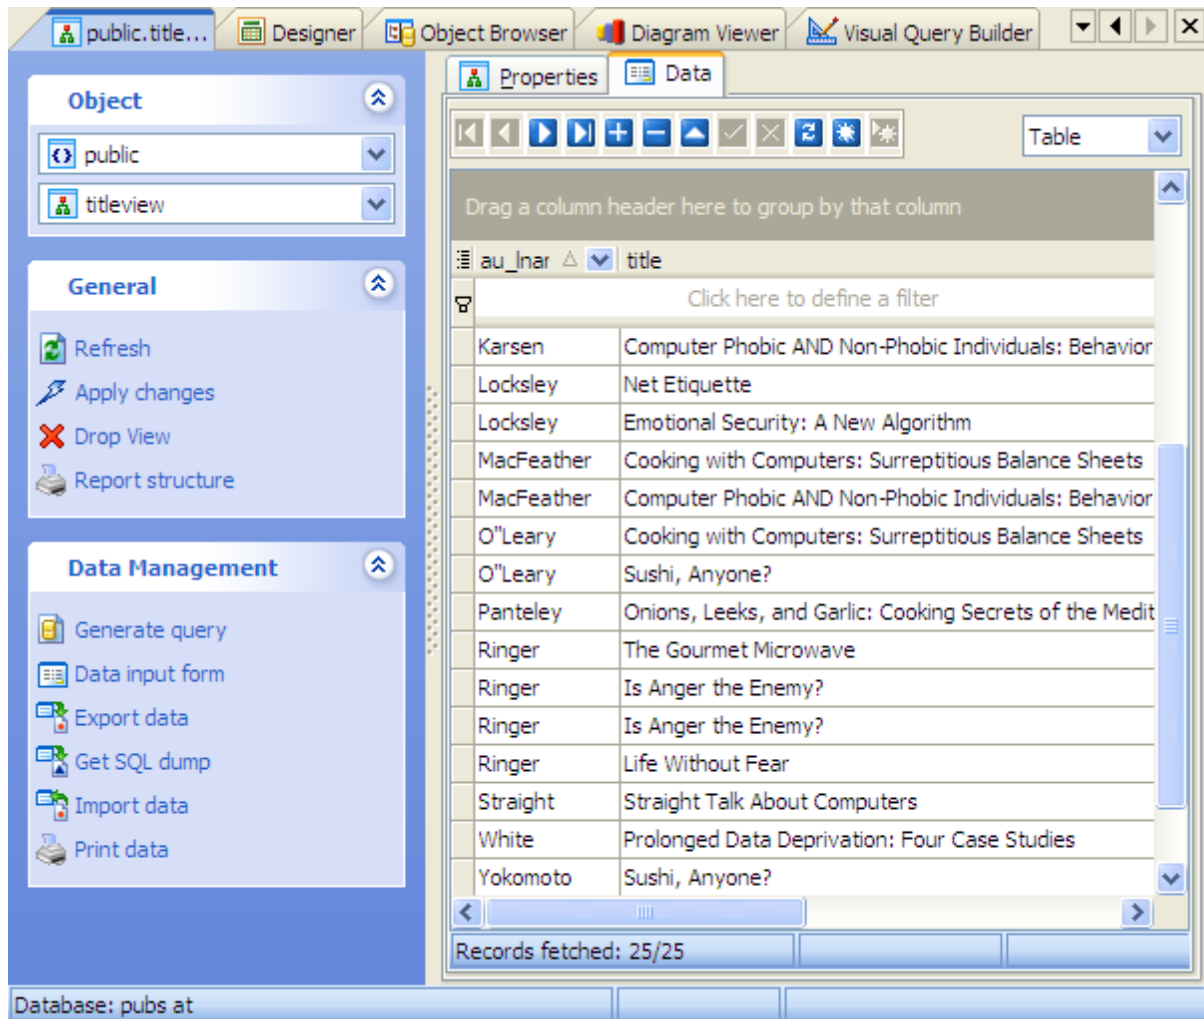

6 Queries

AnySQL Maestro provides several tools for working with SQL queries:

- [SQL Editor](#)^[88] for editing the query text directly and executing SELECT queries;
- [Visual Query Builder](#)^[88] for building SELECT, INSERT, UPDATE and DELETE queries visually;
- [SQL Script Editor](#)^[133] for executing SQL scripts.

Both SQL Editor and Visual Query Builder supports [parameters in queries](#)^[87]

Save frequently used queries to profiles and manage them in the same way as if they were database objects. This means that you can view queries in the explorer tree, in [Object Manager](#) and [Object Browser](#), use them in [BLOB Viewer](#) and [Diagram Viewer](#), perform drag-and-drop operation upon them, and copy them to clipboard like you copy an object.

How can I create a new SQL query?

New queries can be created either in [SQL Editor](#) or in [Visual Query Builder](#).

To create a new query in [SQL Editor](#):

- select the [Tools | SQL Editor](#) main menu item;
- select the [Create New Query](#) item from the navigation bar;
- edit the query text on the [Editor](#) tab of [SQL Editor](#).

To create a new query in [Query Builder](#):

- select the [Tools | Visual Query Builder](#) main menu item;
- build the query on the [Diagram](#) tab of [Visual Query Builder](#).

AnySQL Maestro also provides you with SQL Generator, a tool to create simple SQL statements.

How can I save a query to a file/profile?

To save an existing query from the editor:

- to save the query to profile, use the [Save to profile](#) link from the [Navigation bar](#).
- to save the current query to an *.sql file, select the [Save to file](#) item from the [Navigation bar](#);
- to save all the opened queries to one file, select the [Save all queries](#) item from the [Navigation bar](#);
- to save the designed diagram, select the [Save diagram](#) item from the [Navigation bar](#) of the [Diagram](#) tab of [Visual Query Builder](#).

How can I edit an existing SQL query?

Queries can be opened either in [SQL Editor](#) or in [Visual Query Builder](#).

You can open the query directly from the Explorer tree with a double click or using popup menu. By default it will be opened in [SQL Editor](#).

To edit a query from file, open SQL Editor (the [Tools | SQL Editor](#) main menu item) and use [Load From File](#) from the [Navigation Bar](#) of SQL Editor to load a query from an `*.sql` file.

To edit a query in [Query Builder](#), open the builder (the [Tools | Visual Query Builder](#) main menu item) and then perform one of the following operations:

- to edit a query from a profile, drag it from the [Explorer](#) and drop on the [Editor](#) tab;
- to load a previously saved diagram, use the [Load Diagram](#) item from the [Navigation Bar](#);
- to load a query from an `*.sql` file, open the [Editor](#) tab and select the [Load query](#) item from the [Navigation Bar](#).

On the Query Builder opening the [Diagram](#) tab contains the last edited query.

How can I execute an SQL query?

To execute a query:

- create a new query or open the existing one;
- select the [Execute Query](#) item from the navigation bar of [SQL Editor](#) or [Visual Query Builder](#) respectively;
- view/edit the returned data on the [Result](#) tab.

6.1 SQL Editor

[SQL Editor](#) is a tool for creating and executing SELECT queries. It allows you to create and edit SQL text for the query, prepare and execute queries, and view the results of execution. To open [SQL Editor](#), select the [Tools | SQL Editor](#) main menu item. The most popular query management actions (creating, editing, deleting) are covered by the corresponding [topic](#)^[81].

To use the editor for working with several queries, open new query tab with the [Create new query](#) link on the Navigation bar. With the tabs' popup menu you can create a new query, close existing one, save the query to profile, etc even if editor's navigation bar is closed. Queries' tabs [can be](#)^[181] displayed at the all sides of the editor (bottom, top, left or right).

For more information about query executing and working with query result see the [corresponding topic](#)^[86].

Working with query text

The [popup menu](#) of the editing area provides you with standard operations for working with text such as *Cut* (**Ctrl+X**), *Copy* (**Ctrl+C**), *Paste* (**Ctrl+V**), *Undo* (**Ctrl+Z**), *Redo* (**Shift+Ctrl+Z**) along with a possibility to convert selected text to different cases (*lower*, *UPPER*, and *NameCase*).

You can also comment/uncomment selected text (**Shift+Ctrl+.** and **Shift+Ctrl+,** shortcuts respectively). If no text is selected, the whole line will be commented. By the way, it is not necessary to select commented text to uncomment it, just press **Shift+Ctrl+.** having the cursor inside the commented text. Both kinds of comments (single-line and multi-line) are supported. [SQL Formatter](#)^[84] is also at your disposal.

SQL Editor allows you to use [Visual Query Builder](#)^[88] modal instance to design query visually and load the result query text directly in the editor area. For this purpose use the [Design query](#) link of the editor area's popup menu.

Code completion

AnySQL Maestro provides you with code completion (as on the screen below) to select from a list of tables, columns, views, or other objects without having to manually enter the object's name in the editor. You can activate the completion list by pressing the **Ctrl+Space** key combination.

Syntax highlighting

Database objects are highlighted in the text. You can open the proper object editor by clicking the object name in the text with the **Ctrl** key pressed or with the [Find Object](#) link on the [Navigation bar](#). To adjust the highlighting settings, use [SQL highlight options](#)^[201].

Line modification markers

Lines of code that have been edited during the current session are indicated with a yellow line in the left margin of the editor. When you save the file, the yellow markers turn green. Thus at any time, yellow markers show changed but unsaved



lines of code, and green markers show changes in this session that have been saved.

Find and replace text

Use find and replace to search for, and optionally, replace text in the [SQL Editor](#). To open [Find text/Replace text](#) window, use [Edit | Find/Replace](#) main menu item, corresponding link of popup menu, or **Ctrl+F/Ctrl+H** shortcut. You can also use the [Search again](#) link to apply recent Find text dialog.

Managing the query text

To load query from .sql file, use the corresponding link on the Navigation bar. You can also find there links allowing you to save query text to file, export the contents of the editor to RTF and HTML formats (to file or to clipboard), copy the selected text from to clipboard as a ready-to-use string written in one of the following programming languages: C#, C++, Delphi (Object Pascal), and Java, and also print/preview the contents of the editor.

See also: [Visual Query Builder](#), SQL Script Editor, [SQL Editor Options](#)

6.1.1 SQL Formatter

AnySQL Maestro provides you with [SQL Formatter](#) for DML statements (*SELECT*, *INSERT*, *UPDATE* and *DELETE*). It can be invoked through the [Format SQL](#) link on the [SQL Editor](#)'s navigation bar (**Ctrl+Alt+D** shortcut).

The following options allows you to tune up SQL scripts according to your preferences.

- Cases (for keywords, functions, and identifiers);
- Format type and column length for *INSERT/UPDATE*, and *SELECT* statements;
- *AND* and *OR* operators format.

| Cases | |
|-----------------|------------|
| Keyword case | Upper case |
| Function case | Upper case |
| Identifier case | Upper case |

| Select statements | |
|-------------------|-----------------|
| Format type | Stacked columns |
| Column length | 80 |

| Insert/Update statements | |
|--------------------------|-----------------|
| Format type | Stacked columns |
| Column length | 80 |

| Where condition | |
|---------------------------------------|------------------------------|
| AND operator format | Break line after the keyword |
| OR operator format | Break line after the keyword |
| Add space to comparisons if necessary | <input type="checkbox"/> |

6.1.2 Executing query

SQL Editor provides you with several variants of the query executing.

- To execute all statements of the text area with result data, click the [Execute query](#) item of the Navigation bar or use **F5**, **F8**, or **F9** shortcuts. Statements of each tab of SQL Editor are executed together in a separate thread in order to continue your work with the software while the query is executing.
- You can also [execute query as script](#) (**Shift+F5**, **Shift+F8**, **Shift+F9**). In this case the query does not return data.
- To execute only a selected part of the query text, use [Execute selected only](#) or the **Alt+F5**, **Alt+F8**, **Alt+F9** shortcuts.
- There is also a possibility to execute a statement at the cursor position. For this purpose, use the [Execute at cursor](#) link at the Navigation bar or use the **Ctrl+F5**, **Ctrl+F8**, or **Ctrl+F9** shortcuts.

If the query text is correct, the query is executed, and if the query statement is supposed to return data (e.g. SELECT statement), the [Result](#) tab opens with the data returned by the query. If an error occurs while executing the query, execution stop is stopped and the appropriate error message is displayed in the Information tab.

The [Result](#) area displays the result data in grid. All principles of working with data you can find in [Data Management](#) ⁹⁷ section.

The screenshot displays the AnySQL Maestro application interface. The top toolbar includes buttons for SQL Editor, BLOB Viewer, Dependency tracker, Visual Query Builder, and a database selector set to 'GAME@'. The left sidebar contains four main sections: Database (with a dropdown for 'sdb_demo at sun'), General (with options like 'Execute query', 'Execute as script', etc.), Query management (with options like 'Create new query', 'Delete current query', etc.), and Files (with options like 'Load from file', 'Save to file', etc.). The main window is divided into two panes. The top pane shows a SQL query:

```
SELECT
  NBA.GAME.GAME_DATE,
  HOME_TEAM.CAPTION AS HOME_TEAM,
  (SELECT
    SUM(NBA.GAME_QUARTER.SCORE) AS FIELD_1
  FROM NBA.GAME_QUARTER
  WHERE
    (NBA.GAME_QUARTER.GAME_ID = NBA.GAME.ID)
    (NBA.GAME_QUARTER.TEAM_ID = HOME_TEAM.ID)
  (SELECT
    SUM(NBA.GAME_QUARTER.SCORE) AS FIELD_2
  FROM NBA.GAME_QUARTER
```

The bottom pane shows the results of the query in a table format. The table has three columns: GAME_DATE, HOME_TEAM, and HOME_TEAM_SCORE. The first row is highlighted, showing '28.10.2008' for the date and 'Boston Celtics' for the team. Below the table, it indicates 'Records fetched: 1315'. At the bottom of the interface, there is a status bar showing 'Database: sdb_demo at sun' and a tab for 'RESULT_LIST'.

| | GAME_DATE | HOME_TEAM | HOME_TEAM_SCORE |
|----|------------|------------------------|-----------------|
| 1 | 28.10.2008 | Boston Celtics | |
| 2 | 28.10.2008 | Chicago Bulls | 1 |
| 3 | 28.10.2008 | Los Angeles Lakers | |
| 4 | 29.10.2008 | Philadelphia 76ers | |
| 5 | 29.10.2008 | Orlando Magic | |
| 6 | 29.10.2008 | Washington Wizards | |
| 7 | 29.10.2008 | New York Knicks | 1 |
| 8 | 29.10.2008 | Detroit Pistons | 1 |
| 9 | 29.10.2008 | Minnesota Timberwolves | |
| 10 | 29.10.2008 | Oklahoma City Thunder | |
| 11 | 29.10.2008 | San Antonio Spurs | |

Records fetched: 1315

Information
1315 rows fetched (0,56 sec)


RESULT_LIST Query 5 Query 1

Database: sdb_demo at sun

6.1.3 Query Parameters

Both [SQL_Editor](#)^[88] and [Visual_Query_Builder](#)^[88] admit to using parameters inside the query text. A parameter is a kind of variable. Its value can be specified just before the query execution in the [Parameters](#) window. In the query text the parameter should appear as an identifier with a colon (':') at its beginning, e.g. `:param1`.

The [Parameters](#) dialog is used to specify the query parameters as well as values of the input parameters of procedures or functions before the execution. Enter parameter values and click the [OK](#) button to apply the values and execute the query or use the [Cancel](#) button to abort the execution.

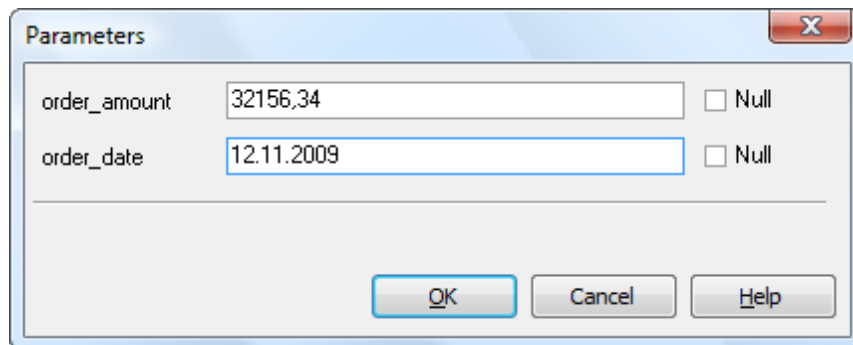

Note: To allow use parameters in query text, check the corresponding option at the [Tools](#)^[178] tab of AnySQL Maestro Options.

6.2 Visual Query Builder

[Visual Query Builder](#) is provided for building data manipulation statements visually. It allows you to create and edit queries without knowledge of SQL, prepare and execute queries, and view the results of the execution. Builder can produce *INSERT*, *UPDATE* and *DELETE* statements as well as the *SELECT* statements containing subqueries and/or *UNIONS*. One instance of the builder can be used only for one query at a time. To open [Visual Query Builder](#), select the [Tools | Query Builder](#) main menu item.


The most popular query management actions (creating, editing, deleting) are covered by the corresponding [topic](#)^[81].

Builder consists of 3 tabs:

- [Diagram](#)^[89] - to create a query from a graphical interface,
- [Editor](#)^[94] - to modify the query text before its executing,
- [Result](#)^[95] (appears after the query executing) - for working with data the query returns.

The builder also allows you to create a view based on the prepared query. For this purpose after the query creating and possibly testing use the Create view from SQL link at the Navigation bar to invoke the corresponding window, and specify [view properties](#)^[74].

See also: [SQL Editor](#)^[83], [Visual Query Builder Options](#)^[183], [Query Parameters](#)^[87]

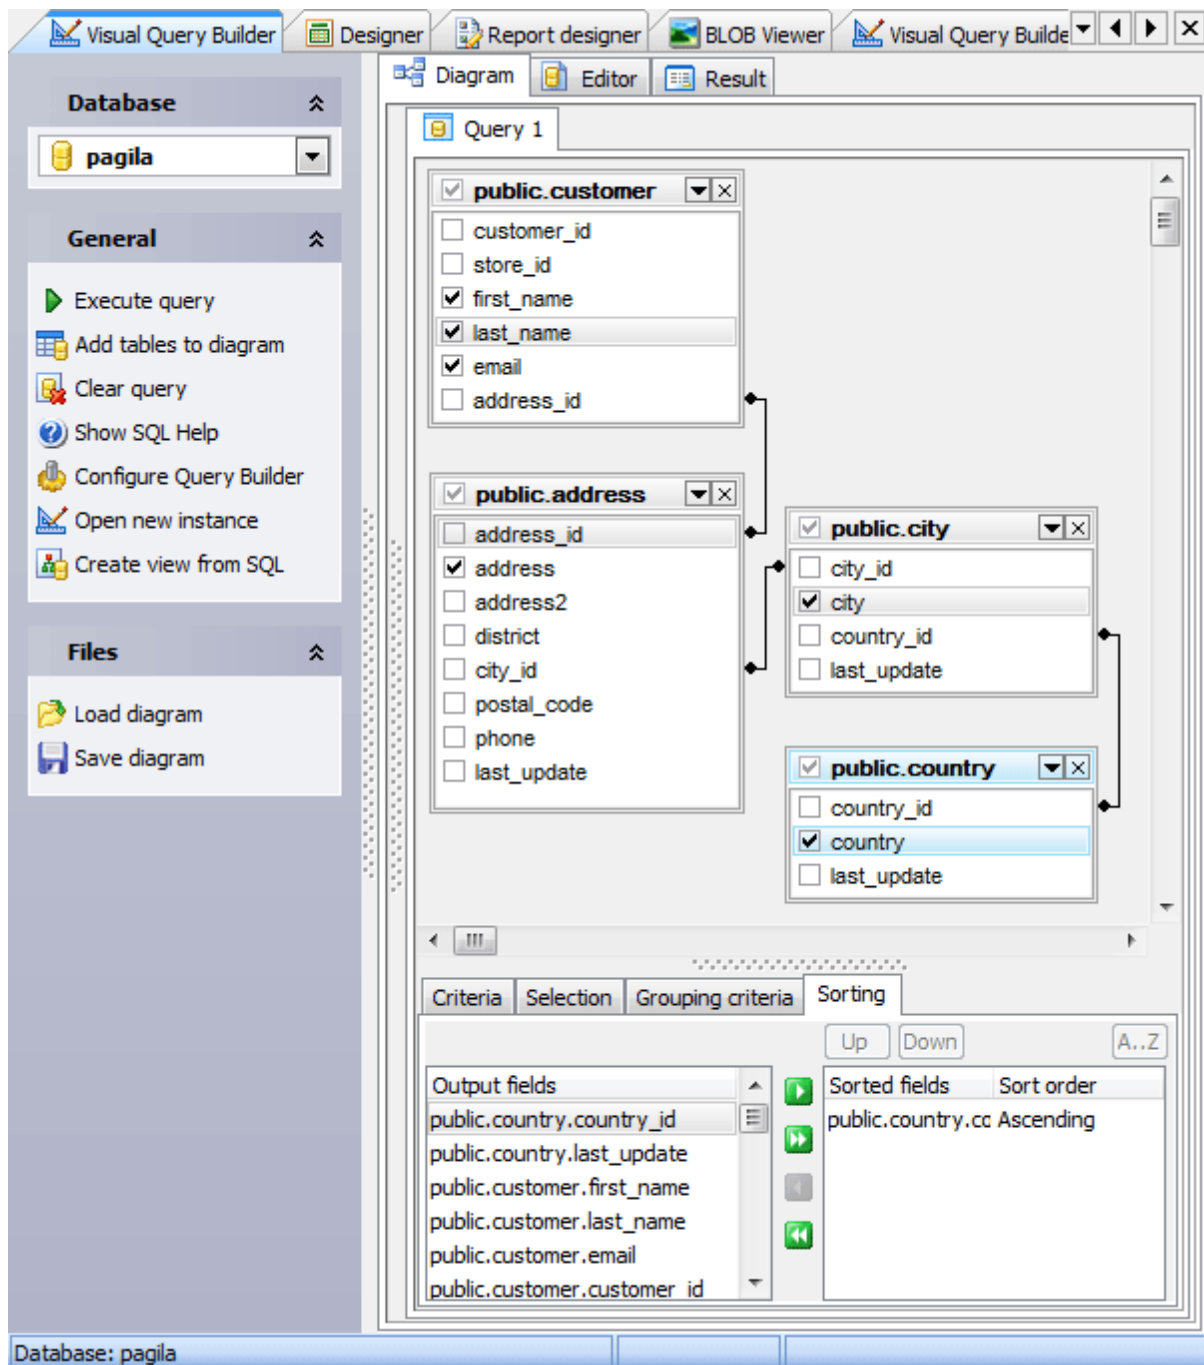

6.2.1 Creating query diagram

The **Diagram** tab is the main area of Visual Query Builder. Using its graphical interface you can select tables and views, join or select columns, and add conditions to the statement.

The **Query Explorer** field occupies the left side of Visual Query Builder main window. All the queries included in the result query (unions, subqueries) are represented at the Query Explorer for prompt access. They are grouped by kind and listed under the according node.

Below step-by-step description of query diagram creating.

- **Select the statement type** from the drop-down list at the top of the [Diagram](#) tab (*SELECT, INSERT, UPDATE, DELETE*).

■ **Add required tables to the Diagram area.**


Use the [Add Table\(s\)](#) link of the area popup menu and select tables from the opened window (Use **Ctrl** or **Shift** pressed to select several tables).

To add only one table, simply drag it from the [Database Explorer](#) or from [Object Manager/Browser](#) to the [Diagram](#) area.

To remove the object, close its window or select the object and press the **Delete** key.

■ **Pick up columns with data to output**

To include a table field to the query, tick off the option box to the left of the field name in the list or double-click it to see the blue icon next to the field name.




To include all the table fields, tick off the option box to the left of the table caption. In case none fields is included, the SQL statement is generated as `SELECT * FROM <Table_Name>`, i.e. all the fields are selected.

To remove the fields from the query, uncheck the corresponding boxes.


■ **Join tables if necessary**

Visual Query Builder supports *INNER JOIN*, *LEFT OUTER JOIN*, and *RIGHT OUTER JOIN*. To associate database objects by two fields, drag a field from the first object's field list to a field from another object's field list. This will set a link between these objects by the selected fields. After you finish dragging, a line will appear between the linked fields. By default *INNER JOIN* syntax will be used.

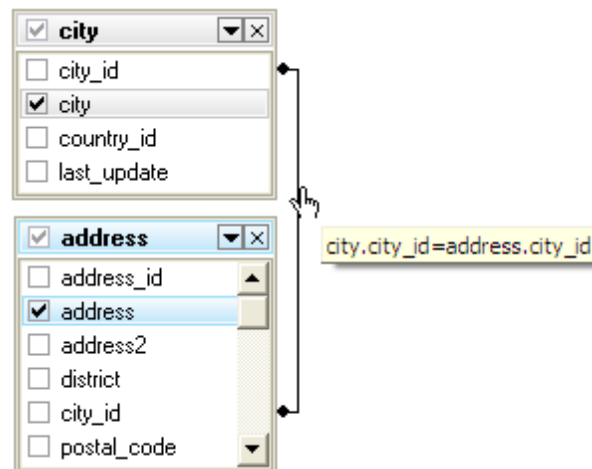

You can view the properties of the object association from the query tab directly. Just set the cursor to the link line. A hint containing the association condition will appear.

To edit the properties, select the [Properties](#) item from the popup menu. A dialog window will appear, there you can change the association condition by selecting it from the list (`=`, `>`, `<`, `>=`, `<=`, `<>`). To create *LEFT OUTER JOIN* / *RIGHT OUTER JOIN* statements, check [All rows from first_table](#)/[All rows from second_table](#) from the window.

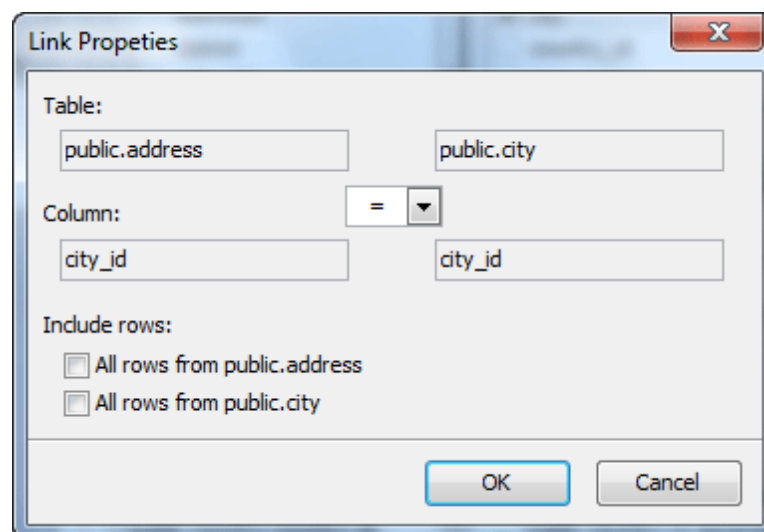

To remove a link between objects, select the [Delete Link](#) item from the popup menu.


To delete all the links of an object, click the '-' button next to the object alias. To insert a point to the link line, select the [Insert Point](#) item from the popup menu, and the new point will appear. Using the point you can move the link line. It does not cause any changes in the query but makes the diagram performance vivid and the visual building more obvious.

Specify WHERE condition

Criteria tab allows you to set the selection conditions. To add a condition, click the button on the left and select the [Add condition](#) item in the popup menu. Edit the condition by clicking its parts and setting their values. Clicking the button to the left of the condition string activates the popup menu which allows you to add a new condition of the same enclosure level, add a new enclosure level, delete the current condition, open or close the condition if it is composite.

A simple condition string contains three fields: an argument, a condition and a second argument (if required for the condition). Clicking each field allows you to set its value. Clicking the argument field make it possible to edit the argument as a text field. You can set a table name or a definite value in this field. The popup menu of the field in the editing mode which contains the [Insert Field](#) function (also called by the **Shift+Enter** hot keys combination).

This function allows you to choose a field from the list of all the table fields available in the query. The popup menu of the condition field allows you to specify the condition you need. The way of proceeding the condition is set in the upper string of the area (*All, Any, None, or Not all* of the following are possible variants). Click the underlined word to modify it.

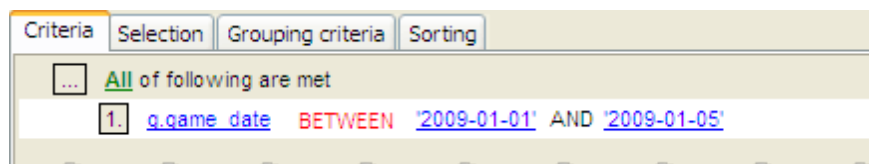

Create subquery if necessary

You can add one or more subqueries to further limit the tables and records returned from a *SELECT* statement when setting a *WHERE* condition in the query builder. To add subquery:

- open [Criteria](#) tab;
 - click the button on the left and select the [Add condition](#) item in the popup menu;
 - right click on an argument field and use the [Insert query](#) link of the popup menu;
 - build the subquery in the new query tab that have appeared in the [Diagram](#) area,
- or
- open [Selection](#) tab;
 - use the [Insert query](#) link of the popup menu;
 - build the subquery in the new query tab that have appeared in the [Diagram](#) area.

Use column aliases

You can set/edit the object alias directly from the query tab by double-clicking the object caption.

| Criteria | Selection | Grouping criteria | Sorting |
|---|----------------------|-------------------|----------|
| <input type="checkbox"/> Select only unique records | | | |
| Source field name | Name of output field | Aggregate | Grouping |
| nba.game.game_date | Game_date | | |
| home_team.caption | caption | | |
| (SELECT SUM(nba.game_quarter.score) | Home_team_score | | |
| (SELECT SUM(nba.game_quarter.score) | Away_team_score | | |
| away_team.caption | caption | | |
| nba.channel.short_caption | short_caption | | |

In case the alias is used as the expression's column name use the [Selection](#) tab displays the output fields of the query. It allows you to edit the names of the query or CASE output fields, set their displaying order and set the aggregate functions (*SUM*, *MIN*, *MAX*, *AVG*, etc.) for each field.

| | |
|---------------------|--|
| <i>AVG</i> | Returns the average of the values in a group |
| <i>BIT_AND</i> | Returns the bitwise AND of all bits in the expression. |
| <i>BIT_OR</i> | Returns the bitwise OR of all bits in the expression. |
| <i>COUNT</i> | Returns the total number of items in a column. This function does not ignore NULL values when calculating results. |
| <i>GROUP_CONCAT</i> | Returns a string result with the concatenated non-NULL values from a group. |
| <i>MAX</i> | Returns the maximum value for the column. |
| <i>MIN</i> | Returns the minimum value for the column. |
| <i>STD</i> | Returns the population standard deviation of the expression. |
| <i>STDDEV</i> | Returns the sample standard deviation of a numeric expression evaluated over a set. |
| <i>SUM</i> | Returns the sum of all the values in the expression. |
| <i>VARIANCE</i> | Returns the population standard variance of the expression. |

To remove the field from the list, select the [Delete current row](#) item from the popup menu of the field row.

To modify the input query field, double-click it and then type the field name or select one from the drop-down list.

To modify the output query field name, double-click it and enter the field name.

DISTINCT option

To specify removal of duplicate rows from the result set, open the [Selection](#) tab and check the [Select only unique records](#) box.

Add HAVING statement

Set the conditions to be included into the HAVING statement within the [Grouping Criteria](#) tab. They are set in the same way as the *WHERE* conditions. To set the aggregate function for the field, double-click the field row in the [Aggregate](#) column and then type the function name or select one from the drop-down list.

ORDER BY clause

Set the way of sorting the query records within the [Sorting](#) tab. The field list on the left represents all the output query fields; the list on the right contains fields by which the query records will be sorted. To move the field from one list to another, drag the selected field or use the [Add](#) and [Remove](#) buttons. To change the sorting order, select a field in the right list and move it using the [Up](#) and [Down](#) buttons.

To change the sorting direction, select a field in the right list and switch the direction (*Ascending, Descending*) using the [A..Z/Z..A](#) button.

Create UNIONS

To combine the result from multiple `SELECT` statements into a single result set, use the [Add union](#) link of the Query Explorer popup menu.


Note: The column names from the first `SELECT` statement are used as the column names for the results returned.

Selected columns listed in corresponding positions of each `SELECT` statement should have the same data type.

6.2.2 Working with editor area

In the [Editor](#) area the query text is automatically generated while you are building the query.

You can edit this text according to the rules of SQL, and all the changes will be displayed on the [Diagram](#) page of [Visual Query Builder](#).

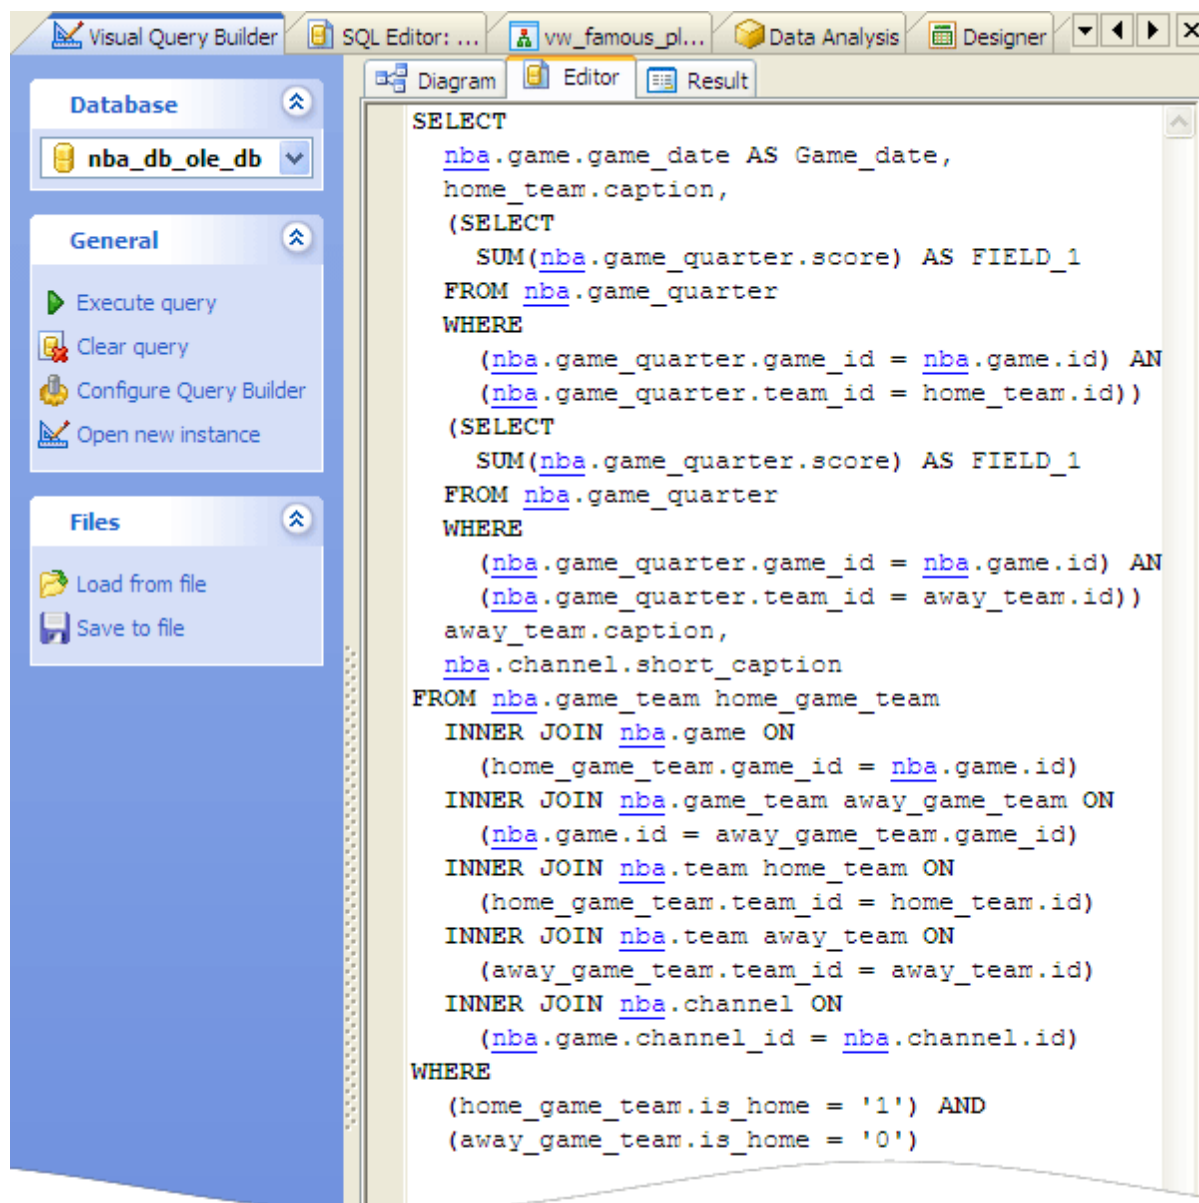

6.2.3 Executing query

To execute the query select the [Execute](#) item in the navigation bar. After that the [Result](#) tab is displayed. This page contains the result data returned by the query, as a grid (see [Data View](#) for details). The popup menu of this tab and the items of the navigation bar allow you to export data and get SQL dump.

Visual Query Builder Designer Report designer BLOB Viewer Visual Query Builder

Diagram Editor Result

Database

pagila

General

- Show SQL Help
- Configure Query Builder
- Open new instance
- Create view from SQL

Data Management

- Export data
- Get SQL dump
- Print data

Table

* country

| | * first_name | * last_name | email |
|------------------------------|--------------|-------------|--------------------------------------|
| | NULL | NULL | NULL |
| country : United Kingdom (9) | | | |
| 1 | ANNE | POWELL | ANNE.POWELL@sakilacustomer.org |
| 2 | APRIL | BURNS | APRIL.BURNS@sakilacustomer.org |
| 3 | ARMANDO | GRUBER | ARMANDO.GRUBER@sakilacustomer.org |
| 4 | CECIL | VINES | CECIL.VINES@sakilacustomer.org |
| 5 | DAN | PAINE | DAN.PAINE@sakilacustomer.org |
| 6 | GILBERT | SLEDGE | GILBERT.SLEDGE@sakilacustomer.org |
| 7 | MARSHALL | THORN | MARSHALL.THORN@sakilacustomer.org |
| 8 | MATTIE | HOFFMAN | MATTIE.HOFFMAN@sakilacustomer.org |
| 9 | SANDRA | MARTIN | SANDRA.MARTIN@sakilacustomer.org |
| country : United States (36) | | | |
| 1 | ALICE | STEWART | ALICE.STEWART@sakilacustomer.org |
| 2 | ANA | BRADLEY | ANA.BRADLEY@sakilacustomer.org |
| 3 | ASHLEY | RICHARDSON | ASHLEY.RICHARDSON@sakilacustomer.org |
| 4 | BETTY | WHITE | BETTY.WHITE@sakilacustomer.org |
| 5 | BILL | GAVIN | BILL.GAVIN@sakilacustomer.org |
| 6 | BRANDY | GRAVES | BRANDY.GRAVES@sakilacustomer.org |
| 7 | BRYAN | HARDISON | BRYAN.HARDISON@sakilacustomer.org |
| 8 | CAROLE | BARNETT | CAROLE.BARNETT@sakilacustomer.org |
| 9 | CAROLINE | BOWMAN | CAROLINE.BOWMAN@sakilacustomer.org |
| 10 | CASSANDRA | WALTERS | CASSANDRA.WALTERS@sakilacustomer.org |
| 11 | CLINTON | BUFORD | CLINTON.BUFORD@sakilacustomer.org |
| 12 | DIANA | ALEXANDER | DIANA.ALEXANDER@sakilacustomer.org |
| 13 | EVA | RAMOS | EVA.RAMOS@sakilacustomer.org |
| 14 | IAN | STILL | IAN.STILL@sakilacustomer.org |

Records fetched: 599

Information

599 rows fetched (0,19 sec)

Database: pagila

7 Data Management

Query results and table data are displayed on the [Data](#)^[61] or [Result](#)^[86] tabs of [Table Editor](#)^[60], [SQL Editor](#)^[83] or [Visual Query Builder](#)^[88].

Data are displayed as a grid (or as info cards) which provide a lot of useful features such as editing, grouping, sorting, filtering, etc. See [Data View](#)^[98] for details.

Navigation bars of these tabs as well as popup menus of their working areas places at your disposal the following functions for managing data:

- [Export Data](#)^[114] allows you to export data to various formats, including MS Excel, MS Access, RTF, HTML, PDF and more.
- [Get SQL Dump](#)^[121] exports data to the SQL script as a number of INSERT statements.
- [Import Data](#)^[124] provides you with possibility to import data from MS Excel, MS Access, DBF, XML, TXT, and CSV.
- [Edit BLOB](#)^[109] allows you to view and edit the content of BLOB and TEXT fields.

7.1 Data View

AnySQL Maestro represents all data (stored in tables and views, results of queries and procedures) in [grid](#)^[99] or in [info cards](#)^[104]. By default, data is displayed in a grid - tabular view of data. To change the type of the data representation, use the drop-down list at the top of the tab. Both of the data representations support UNICODE/UTF-8 data. The status bar displays the number of records in the current data set. To reset grid to default settings, open the Data tab when holding the **Ctrl** key.

| | CUST_NO | CUSTOMER | CONTACT_FIRST | CONTACT_LAST | PHONE_NO | ADDRESS |
|----|---------|---------------------------|---------------|---------------|-----------------|---------|
| 1 | 1001 | Signature Design | Dale J. | Little | (619) 530-2710 | 151 |
| 2 | 1002 | Dallas Technologies | Glen | Brown | (214) 960-2233 | P. 4 |
| 3 | 1003 | Buttle, Griffith and Co. | James | Buttle | (617) 488-1864 | 230 |
| 4 | 1004 | Central Bank | Elizabeth | Brocket | 61 211 99 88 | 66 |
| 5 | 1005 | DT Systems, LTD. | Tai | Wu | (852) 850 43 98 | 400 |
| 6 | 1006 | DataServe International | Tomas | Bright | (613) 229 3323 | 200 |
| 7 | 1007 | Mrs. Beauvais | NULL | Mrs. Beauvais | NULL | P.C |
| 8 | 1008 | Anini Vacation Rentals | Leilani | Briggs | (808) 835-7605 | 330 |
| 9 | 1009 | Max | Max | NULL | 22 01 23 | 1 E |
| 10 | 1010 | MPM Corporation | Miwako | Miyamoto | 3 880 77 19 | 2-6 |
| 11 | 1011 | Dynamic Intelligence Corp | Victor | Granges | 01 221 16 50 | Flo |
| 12 | 1012 | 3D-Pad Corp. | Michelle | Roche | 1 43 60 61 | 22 |
| 13 | 1013 | Lorenzi Export, Ltd. | Andreas | Lorenzi | 02 404 6284 | Via |

Records fetched: 15/15 LIMIT 1000 OFFSET 0

Navigation buttons

Both data representations are equipped with navigation buttons. They are represented at the top of the data tab and allow you to navigate between records and to accomplish common operations:

- To add a new record, use the *Plus* button or the **Insert** shortcut.
- To delete a new record, use the *Minus* button or the **Delete** shortcut.
- To edit an existing record, push the corresponding button or invoke the [Data Input Form](#)^[105] using popup menu of the necessary record, with **Ctrl+Alt+D** shortcut, or with the corresponding link at the Navigation bar. To edit a field value, click it and enter the new one inline.

The pagination option allows you to limit the number of browsed records. By default, the number of records represented in grid at once is 1000. To change the number of records represented in the current grid, enter the necessary value in the pagination bar. To specify the default one or to disable pagination, use the [data grid option](#)^[190].

Navigation bar

The Data management group of the Navigation bar allows to invoke [Data Input Form](#)^[105], [SQL Editor](#)^[83] with SELECT query, [Data Export](#)^[114], and [Data Import](#)^[124] modules using corresponding links, also get [SQLdump](#)^[121] of the current data set and print current data with enabled preview in WYSIWYG mode.

See also: [Table Editor](#)^[60], [SQL Editor](#)^[83], [Visual Query Builder](#)^[88]

7.1.1 Working with data grid

Our software offers two grid modes:

- the full grid mode is a fully functional data representation equipped with abilities to filter and to sort data;
- the simple grid mode is provided for working with large number of records. For speed-up data fetching, filtering and sorting abilities are not enabled in this mode. The notification bar at the top of the grid (see the picture below) announces that the grid has been switched to the simple mode.

Result 1 Result 2 Result 3

Table

The grid has been switched to the simple mode because of the query returned more than 4000 rows (you can customize this number in the [Options](#) dialog). Filtering, sorting and grouping features are not enabled in this mode.

Other actions:
[Switch to full mode now](#) | [Always use full mode](#) | [Dismiss this message](#)

| CNO | TITLE | FIRSTNAME | NAME | ZIP | ADDRESS |
|------|---------|-----------|-----------------|-------|---------------------------|
| 3000 | Mrs | Jenny | Porter | 10580 | 1340 N. Ash Street, #3 |
| 3100 | Mr | Peter | Brown | 48226 | 1001 34th St., APT.3 |
| 3200 | Company | NULL | Datasoft | 90018 | 486 Maple St. |
| 3300 | Mrs | Rose | Brian | 75243 | 500 Yellowstone Drive, #2 |
| 3400 | Mrs | Mary | Griffith | 20005 | 3401 Elder Lane |
| 3500 | Mr | Martin | Randolph | 60615 | 340 MAIN STREET, #7 |
| 3600 | Mrs | Sally | Smith | 75243 | 250 Curtis Street |
| 3700 | Mr | Mike | Jackson | 45211 | 133 BROADWAY APT. 1 |
| 3800 | Mrs | Rita | Doe | 97213 | 2000 Humboldt St., #6 |
| 3900 | Mr | George | Howe | 75243 | 111 B Parkway, #23 |
| 4000 | Mr | Frank | Miller | 95054 | 27 5th St., 76 |
| 4100 | Mrs | Susan | Baker | 90018 | 200 MAIN STREET, #94 |
| 4200 | Mr | Joseph | Peters | 92714 | 700 S. Ash St., APT.12 |
| 4300 | Company | NULL | TOOLware | 20019 | 410 Mariposa St., #10 |
| 4400 | Mr | Antony | Jenkins | 20903 | 55 A Parkway, #15 |
| 4401 | Company | NULL | MagicStrawberry | 78146 | 76 Highland Road, #120 |
| 4402 | Company | NULL | OrangeHand | 78609 | 212 Oak Avenue, #30 |

Records fetched: 4495

Information
 4495 rows fetched (2,00 sec)


By default, the grid automatically switches to the simple mode for queries returning more than 5000 records (the number can be customized in the [Options](#) ¹⁹⁰ dialog).

The following abilities are not available in the simple grid mode:


■ **Sorting data (only in the full grid mode)**

Click the column caption to sort data by the values of this column. To select sort order (ascending or descending), use popup menu of the column caption.

To sort data on a combination of grid columns, use the [Advanced sort...](#) link of the popup menu of the grid's header. The [Advanced sorting](#) window will be shown.

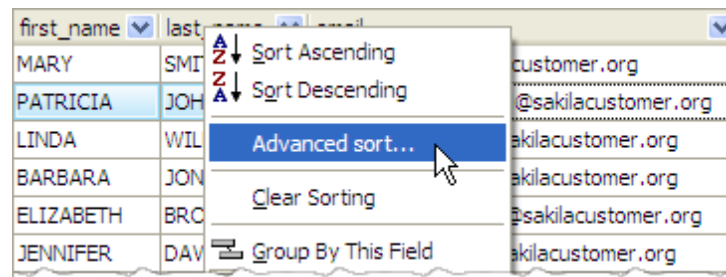

Select there the columns you want to sort from the [Available columns](#) list in the order of priority. Specify the sort order if necessary and click OK.

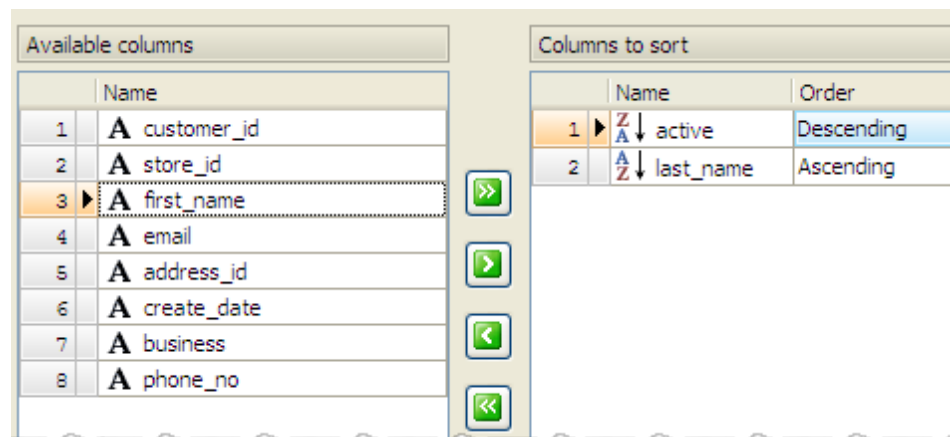


To cancel the sorting order, press **Ctrl** and click on the sorted column caption.

■ Filtering represented records (only in the full grid mode)

There are several ways to filter data represented in grid. See [the corresponding topic](#)^[106] to find out their descriptions.

■ Hiding selected columns

You can show/hide columns using a button in the left top corner of the grid. Just check/uncheck the column in the drop-down list.

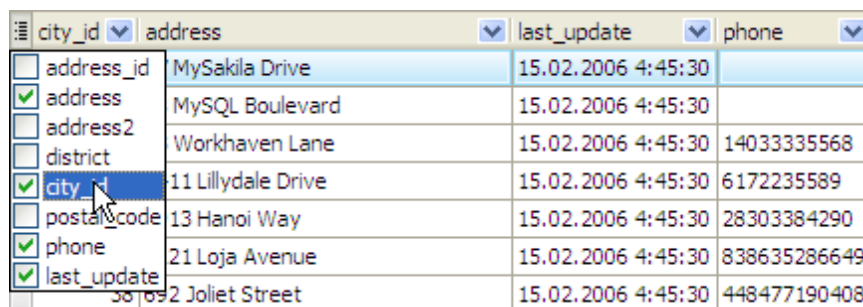

■ Columns reordering

To reorder columns, use drag-n-drop.

■ Grouping records

You can group grid data by any of the columns by dragging the column header to the destination area. Now all the records are displayed as subnodes to the grouping row value as shown in the picture. To reverse grouping, just drag the column name from the upper area back.

The screenshot shows the AnySQL Maestro interface with a data grid. The grid is grouped by 'round' and 'date'. The columns are ID, team1ID, team2ID, score1, score2, refereeID, and comments. The data is organized into a tree structure where rows are grouped by 'round' and then by 'date'.


| ID | team1ID | team2ID | score1 | score2 | refereeID | comments |
|-------------------|---------|---------|--------|--------|-----------|--|
| round : 1 | | | | | | |
| round : 2 | | | | | | |
| round : 3 | | | | | | |
| date : 24.08.2004 | | | | | | |
| date : 25.08.2004 | | | | | | |
| 24 | 6 | 2 | 3 | 0 | 8 | Jeffers brukte 34 minutter på å vinne |
| 22 | 1 | 4 | 3 | 0 | 17 | I den hundrede kampen i alle konkurranse |
| 29 | 16 | 5 | 1 | 2 | 19 | Southamptons slapp inn mål i sin 11. li |
| 27 | 9 | 13 | 0 | 2 | 0 | Fulhams første tap denne sesongen, |
| 28 | 14 | 18 | 2 | 2 | 18 | Newcastle skuffer i årets Premier League |
| 26 | 19 | 17 | 1 | 1 | 12 | Det ble uavgjort på Hawthornes etter |
| date : 30.08.2004 | | | | | | |
| 31 | 12 | 8 | 0 | 0 | 1 | Igjen skuffet Manchester United mot |
| date : 14.12.2004 | | | | | | |
| round : 4 | | | | | | |
| round : 5 | | | | | | |
| date : 11.09.2004 | | | | | | |
| date : 12.09.2004 | | | | | | |
| date : 13.09.2004 | | | | | | |
| round : 6 | | | | | | |

Records fetched: 380


Information
380 rows fetched (0,64 sec)

■ Using aggregate functions

To get a sum of column values, a min or a max value, an average column value or an amount of records, use **Data Grid Footer**. Select the **Footer** item at the grid caption's popup menu.

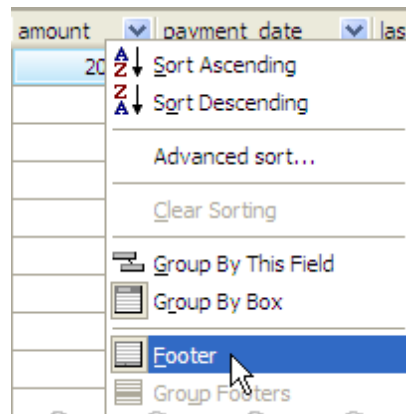

It will be shown at the bottom of the grid. The popup menu of the footer allows you to get an aggregate function result calculated with the corresponding column values.

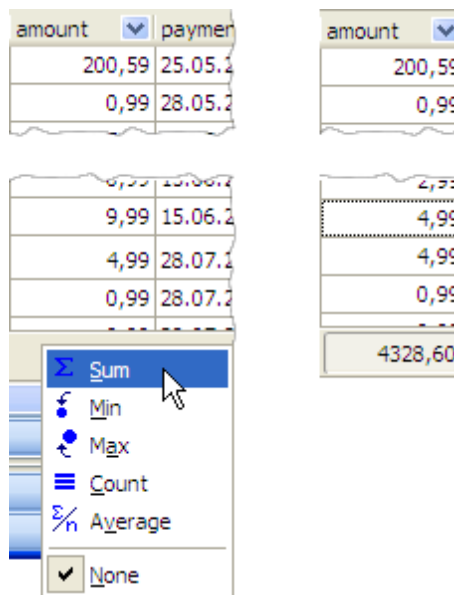


For grouped data use [Group Footers](#).

■ Data alignment

The grid's header popup menu allows to align column data. Use the [Alignment](#) link and select the alignment type.

■ Fixing columns

You can fix grid columns to view them permanently when working with other grid data. To fix a column, choose the corresponding item from the grid's header popup menu.

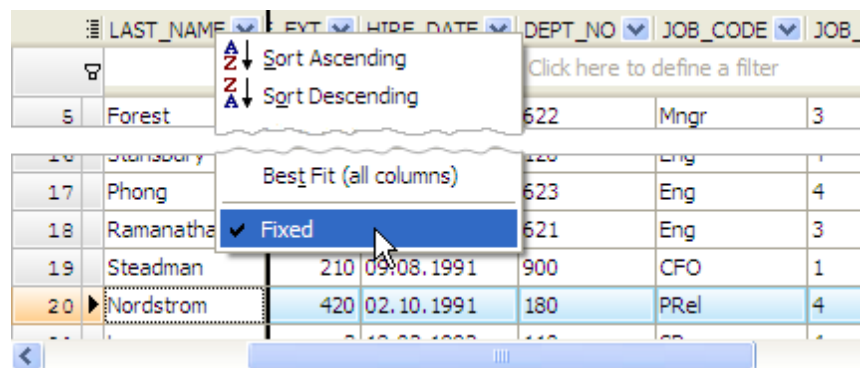


■ Row numbering

There is also a possibility to display row numbers in grids. You can [adjust](#)^[191] the corresponding column to your liking.

■ Inline images

It is possible to display images directly in the grid as on the picture below.

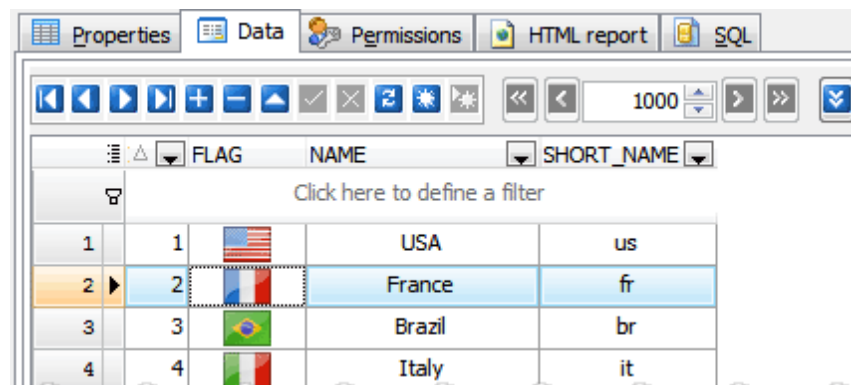

To enable/disable this view mode, open the *Enable inline images* window using the *Manage inline images* item of the column popup menu. The window options allow to set or change the image fitting and specify the row height. To add new images or change existing ones, use [BLOB Editor](#)^[109] (see below).

■ Working with BLOBs

To [edit a BLOB field](#)^[109], double click the field, or use the corresponding popup menu item. There are also possibilities to export all BLOBs stored in the table column to files and import BLOBs from a directory to the table columns. In this case you need to set the Target directory, specify the template to be used for file names and the column BLOBs to be exported from (imported to).

7.1.2 Working with info cards

Info cards correspond to the records. You can [filter records by custom conditions](#)^[106] and edit data directly in info cards or with [Data Input Form](#)^[105].

| id: | |
|--------------------|------------|
| first_name: | Gilbert |
| last_name: | Arenas |
| career_start_year: | 2001 |
| career_end_year: | 0 |
| position_id: | 6 |
| photo: | |
| country_id: | 1 |
| height: | 193 |
| birthday: | 06.01.1982 |
| weight: | 97,5 |
| college_id: | 15 |
| current_team_id: | 12 |
| current_number: | 0 |

| id: | |
|--------------------|------------|
| first_name: | Hilton |
| last_name: | Armstrong |
| career_start_year: | 2006 |
| career_end_year: | 0 |
| position_id: | 11 |
| photo: | |
| country_id: | 1 |
| height: | 211 |
| birthday: | 11.11.1984 |
| weight: | 106,6 |
| college_id: | 7 |
| current_team_id: | 27 |
| current_number: | 12 |

| id: | |
|--------------------|-----------|
| first_name: | Darrell |
| last_name: | Arthur |
| career_start_year: | |
| career_end_year: | |
| position_id: | |
| photo: | |
| country_id: | |
| height: | |
| birthday: | 25.03.198 |
| weight: | |
| college_id: | |
| current_team_id: | |
| current_number: | |

| id: | |
|--------------------|------------|
| first_name: | Trevor |
| last_name: | Ariza |
| career_start_year: | 2004 |
| career_end_year: | 0 |
| position_id: | 10 |
| photo: | |
| country_id: | 1 |
| height: | 203 |
| birthday: | 30.06.1985 |
| weight: | 95,3 |
| college_id: | 2 |
| current_team_id: | 5 |
| current_number: | 3 |

| id: | |
|--------------------|------------|
| first_name: | Ron |
| last_name: | Artest |
| career_start_year: | 1999 |
| career_end_year: | 0 |
| position_id: | 10 |
| photo: | |
| country_id: | 1 |
| height: | 201 |
| birthday: | 13.11.1979 |
| weight: | 117,9 |
| college_id: | 16 |
| current_team_id: | 22 |
| current_number: | 96 |

| id: | |
|--------------------|-----------|
| first_name: | D.J. |
| last_name: | Augustin |
| career_start_year: | |
| career_end_year: | |
| position_id: | |
| photo: | |
| country_id: | |
| height: | |
| birthday: | 10.11.198 |
| weight: | |
| college_id: | |
| current_team_id: | |
| current_number: | |

Records fetched: 67

7.1.3 Data input form

Use [Data Input Form](#) to add new records or edit existing ones. To invoke the dialog, use the corresponding link from the popup menu or **Ctrl+Alt+D** shortcut.

| language_id | * name | * last_update |
|-------------|----------|---------------|
| 1 | English | 15.02.2006 10 |
| 2 | Italian | 15.02.2006 10 |
| 3 | Japanese | 15.02.2006 10 |
| 4 | Mandarin | 15.02.2006 10 |
| 5 | French | 15.02.2006 10 |
| 6 | German | 15.02.2006 10 |

The dialog's fields contain the values of the current grid row. Use the **Insert** button to enter values of a new record and the **Post** button to update the current row. The **Cancel** button reverts all the field values within a form to their initial values (or to the last posted values). The **Previous** and **Next** buttons allow you to switch between grid records without closing the dialog.

Controls containing values of primary and foreign key columns are marked with the 'gold key' and 'silver key' images accordingly. Controls containing values of required (NOT NULL) columns are marked with a red asterisk.

There are possibilities to use lookup editors on working with columns linked with foreign keys, a calendar for *timestamp* columns and a calculator for *decimal* ones.

7.1.4 Data filtering

AnySQL Maestro support filtering records by the following methods:

- **Filter by a column value**

Select the **Use as Filter** item from the field popup menu to filter records by the current column value.

- **Filter by several column values**


Use the drop-down button in the column caption area to filter records by the selected column value(s) or enter the filter condition directly in [the filter row](#)¹⁹⁵.

Filter by two operators

Invoke simple filter dialog using the [Custom](#) item of the column caption area drop-down list. Select a logical operator for checking the column values (like "is less than", "is greater than", etc.) and set the value to be checked by this operator in the next box; then set the second condition if necessary in the following way and set the relation between these two conditions, whether both of them should be matched or just one of them; use the '_' character to represent any single symbol in the condition and the '%' character to represent any series of symbols in the condition.

Filter by any custom criteria

To filter data according to more difficult custom conditions, use the Filter Builder dialog. To invoke the dialog, use the [Set Filter](#) link of popup menu or click the [Customize](#) button on the [Filter](#) panel. This panel is visible if any filtering is already applied to the grid (you can use column header menu or grid menu for quick filtering).

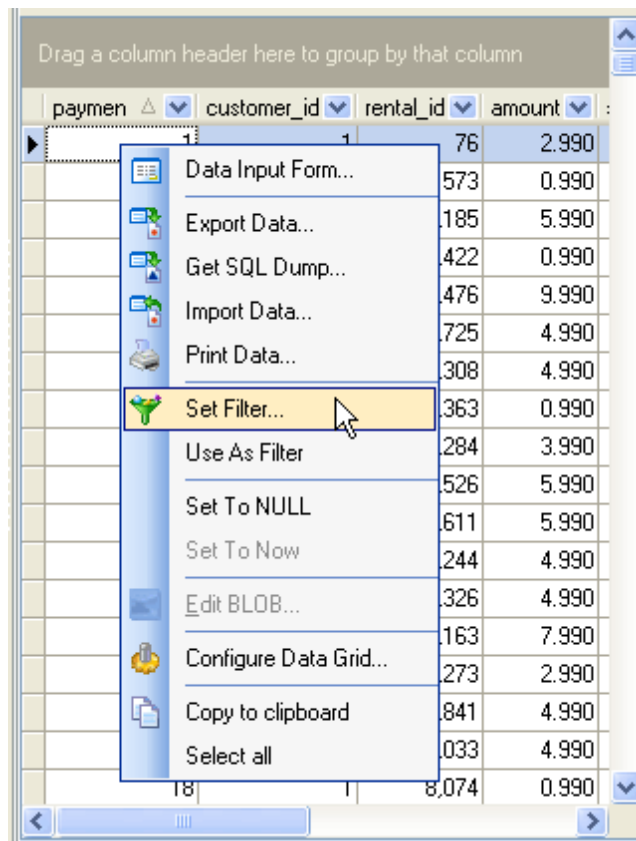

The dialog also allows to save filter criteria to an external file for future use.

After you set a filter, the filtering panel becomes visible at the top/bottom of the grid

where you can see the active filtering condition and easily enable or disable it by clicking the check box on the left. To customize the filtering process, use [filter options](#)^[195].

The [Copy current filter as SQL condition to clipboard](#) feature is useful in case the same compound filter is applied several times. Just once apply the filter, copy to clipboard as SQL condition, paste to [SQL Editor](#)^[83] and save as a query. You can also use [Generate query](#) link on the Navigation bar.

See also: [Data View](#)^[98], [Table Editor](#)^[60], [SQL Editor](#)^[83], [Visual Query Builder](#)^[88]

7.2 BLOB Editor


BLOB Editor is a tool to view and edit BLOB data in the following ways: [hexadecimal dump](#)^[110], [plain text](#)^[110], [graphical image](#)^[109], [HTML page](#)^[111], or [PDF document](#)^[112]. BLOB Editor is invoked from [data grid](#)^[98] of any [table editor](#)^[60] or the result tab of [SQL Editor](#)^[83] and [Visual Query Builder](#)^[88] by double clicking of the BLOB field to be edited or with the [Edit BLOB](#) link of the field's popup menu. The editor also can be called from [BLOB Viewer](#)^[137] with the [Edit current BLOB](#) button.

With BLOB Editor you can work with all BLOB columns of the grid. To switch between columns, select the necessary one from the [BLOB field](#) list.

[BLOB Editor](#) allows you to navigate between the grid records using the [Previous](#) and [Next](#) buttons. You can load the new BLOB content and save or clear it using corresponding buttons. After changes are made, click the [Post](#) button to apply the changes or the [Cancel](#) button to discard them.


7.2.1 Editing as image

The [Image](#) panel of BLOB Editor displays field data as graphical image. Use the [Save](#) and [Load](#) buttons to save the image to a file or load an image from a file. A graphical representation of BLOB data supports five image formats: BMP, Windows metafile, JPEG, GIF and PNG.

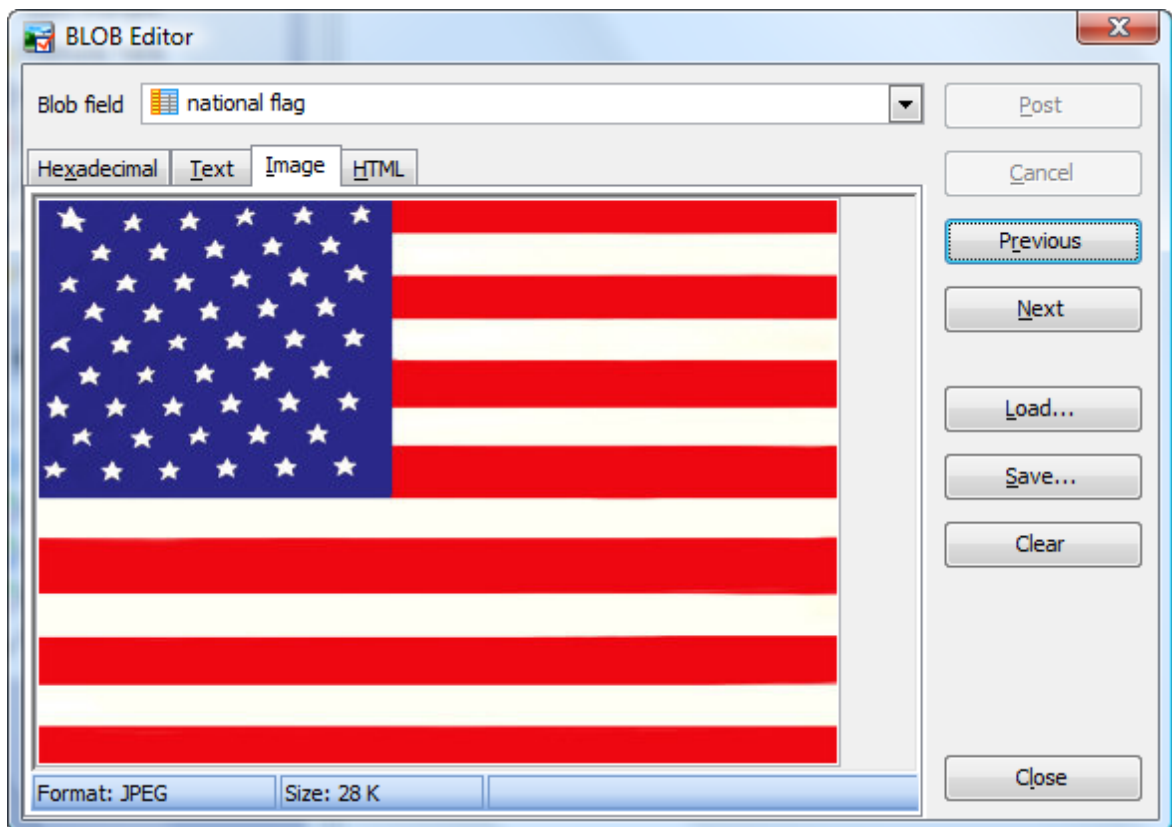


7.2.2 Editing as hexadecimal dump

The [Hexadecimal](#) panel allows you to edit data in hexadecimal mode. To load/save a hexadecimal dump from/to a file, use the corresponding buttons. Use the Insert key to switch between Insert and Overwrite modes.

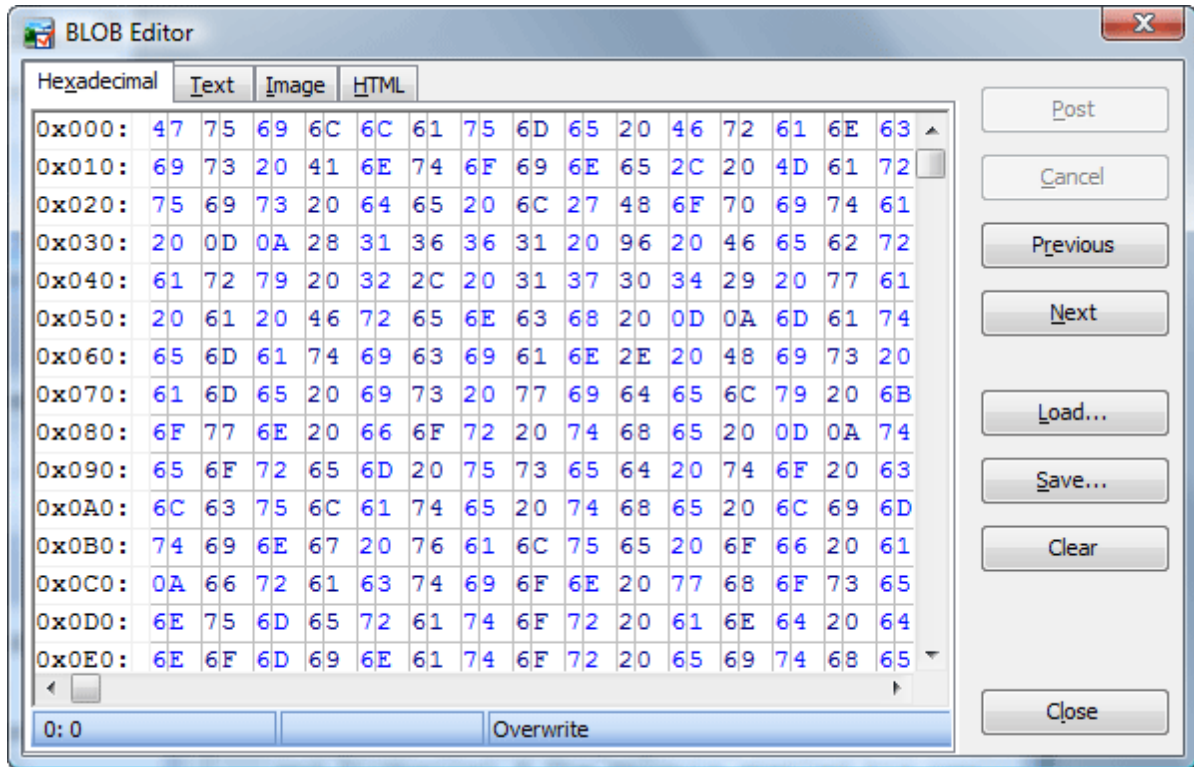


7.2.3 Editing as plain text

The [Text](#) panel allows you to edit data as a simple text. Several types of text highlighting are available (*Plain text, SQL, XML, Java, VBScript, JScript, Cmd batch, PHP, CSS, UnixShell Script, INI, and HTML*). The popup menu of the panel allows you to invoke [Find Text](#), [Replace Text](#) and [Go to line](#) dialogs.

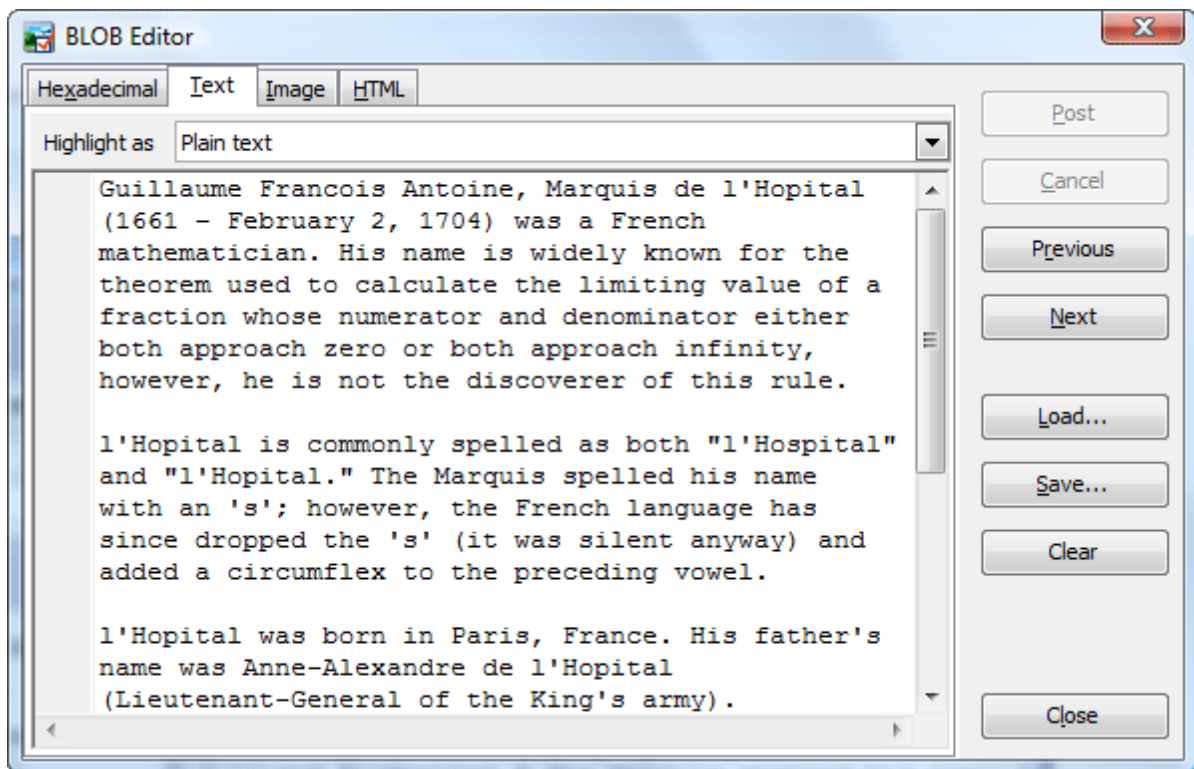


7.2.4 Editing as HTML

The [HTML](#) panel presents field data as HTML. You can load a new content of the current field from a .html file or type it manually within the [Text](#) tab of the editor.

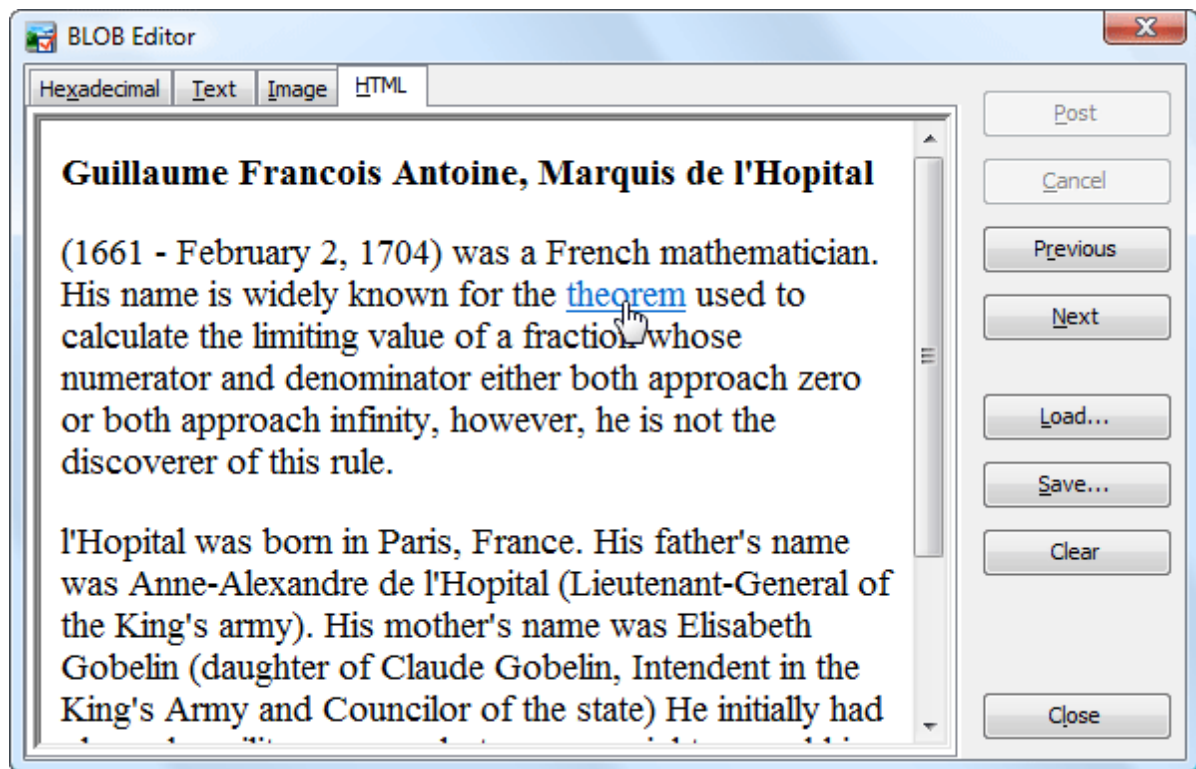

7.2.5 Editing as PDF document

The PDF panel presents field data as PDF document. To accomplish common operations with data, use the Adobe Reader toolbar.

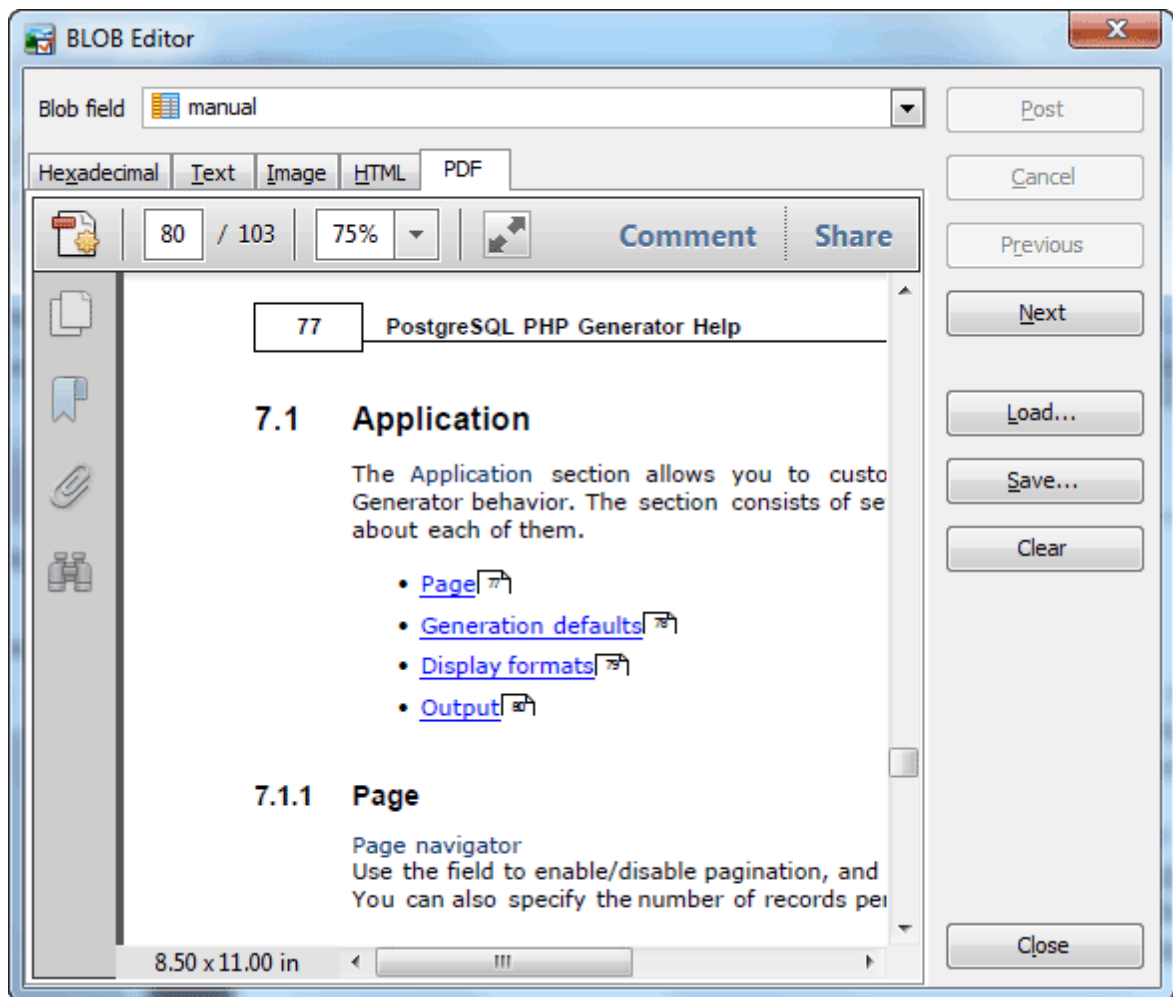

7.3 Export Data Wizard

Data Export wizard is a tool to save data from database tables, views, and queries to the most popular formats. It allows you to fully customize output files including header and footer, fonts, colors, and data formats.

Export Data tool supports:

- Microsoft Office Excel 97-2003, 2007
- CSV
- HTML
- XML
- Text
- Microsoft Office Word 97-2003, 2007
- Microsoft Office Access
- OpenDocument Spreadsheet
- OpenDocument Text
- DBF
- PDF
- RTF
- DIF
- SYLK
- LaTeX.

In order to run the wizard you should either

- open the table in [Table Editor](#);
- go on to the [Data](#) tab

or

- open and execute the query in [SQL Editor](#) or [Query Builder](#);
- proceed to the [Result](#) tab

and select the [Export Data](#) item from the [Navigation Bar](#).

To export your data,

- [Set the format and the name](#) ^[114] of the destination file;
- Specify such additional options of the result file as [header and footer](#) ^[115], [formats applied to exported data](#) ^[116] and [some format-specific options](#) ^[117];
- [Select columns](#) ^[116] you want to include into result files;
- [Specify other export options](#) ^[120].

See also: Get SQL Dump, [Import Data Wizard](#) ^[124]


7.3.1 Setting destination file name and format








Select one of the available destination formats and set the name for the result file. The file name extension in the [Destination file name](#) box varies according to the selected export type.

The file name may contain current timestamp with the %ts:TIMESTAMP_FORMAT% string. Examples of valid log file names:

dbname_export_%ts:yyyy_mm_dd%.log
export_%ts:yyyy_mm_dd_hh_mm%.log
%ts:yyyy_mm_dd_hh_mm_ss%.log


Destination format _____

 Select one of the available destination formats.

-  ☒ Microsoft Office Excel 97 - 2003
-  ☐ Microsoft Office Excel 2007 - 2010
-  ☐ Delimiter-separated values (CSV, DSV, TSV)
-  ☐ Text file (Fixed-width columns)
-  ☐ HTML
-  ☐ XML
-  ☐ Other

Microsoft Office Word 97 - 2003 ▼

Destination file _____


 Select or enter the result file name and specify the encoding if necessary. To add current timestamp to the result file name, use the %ts:TIMESTAMP_FORMAT% string (for example, %ts:yyyy_mm_dd%). Hint: you can set default directory for data export in the Edit Database Profile dialog.

File name Encoding

C:\Data\Excel\Customers.xls ... ANSI ▼


7.3.2 Setting header and footer

To specify the result file's header and footer, double click the corresponding button and complete fields of the [Header and Footer](#) window.

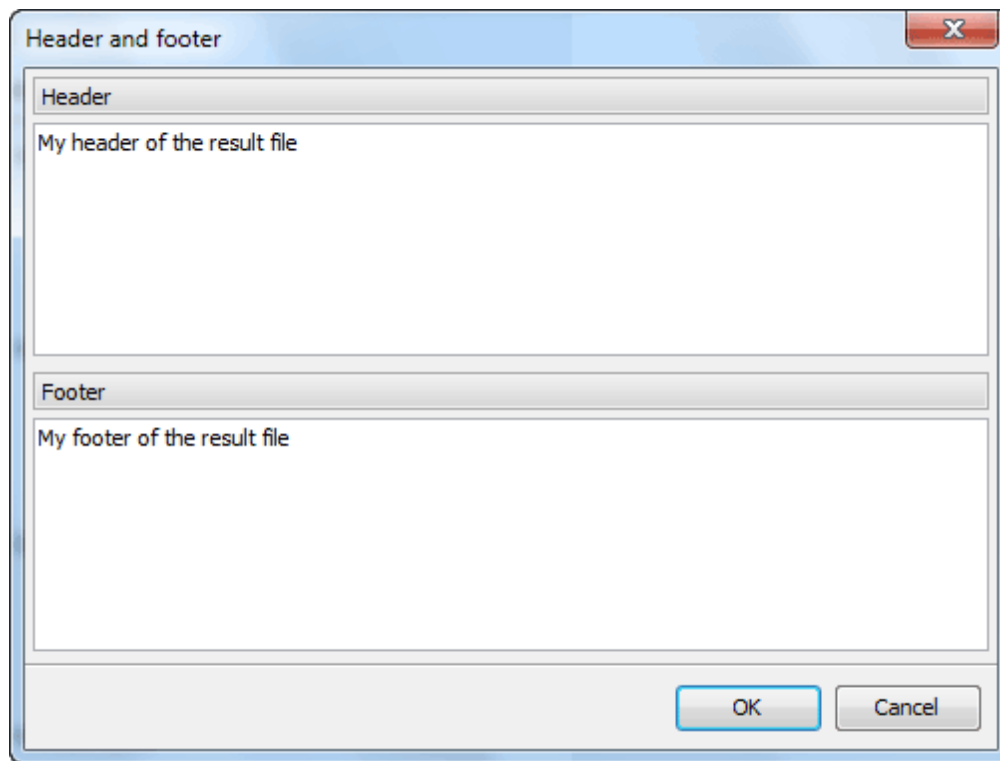


7.3.3 Selecting fields for export

Uncheck the Selected box to exclude the corresponding field from the export, specify a Caption to be used for the result column, and also width, and alignment for output columns (when applicable).

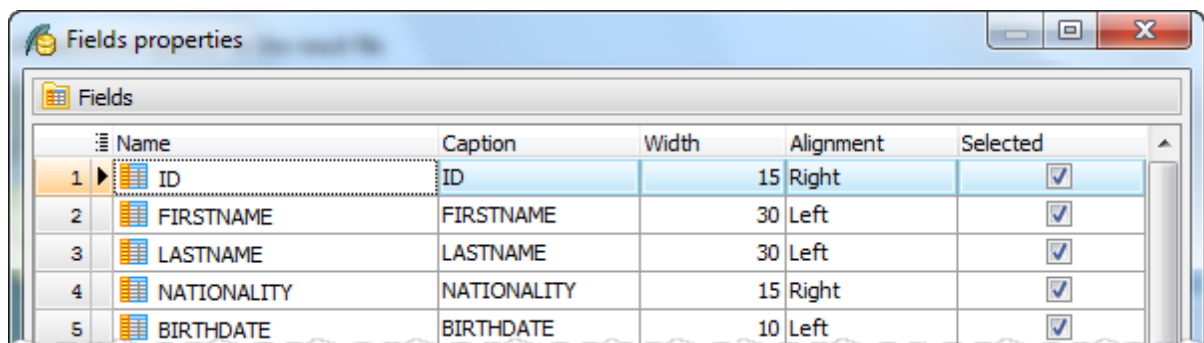

7.3.4 Adjusting data formats

This step allows you to customize formats applied to exported data. Edit the format masks to adjust the result format in the way you need.

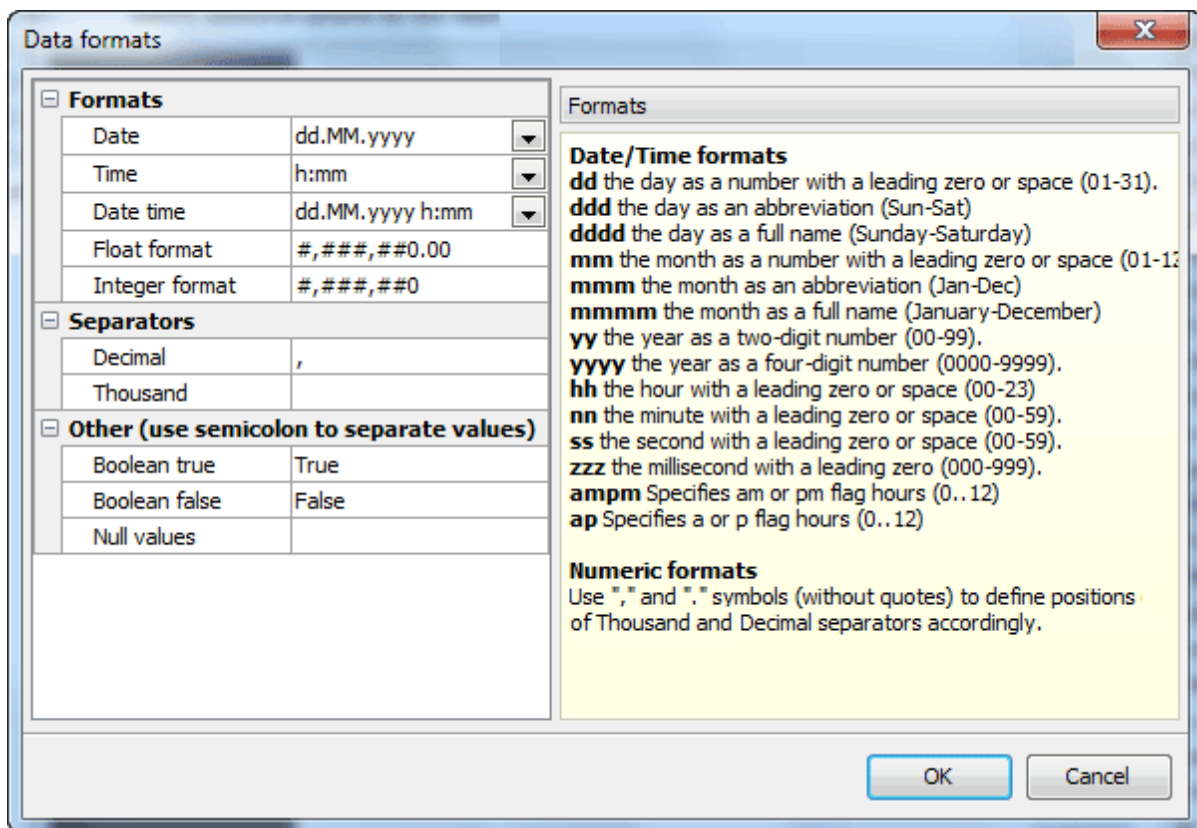

7.3.5 Setting format-specific options


Each format supposes corresponding additional export options. Use the wizard option to adjust export properties depending on the target file format you have selected earlier. The following formats are at your disposal: [Microsoft Excel](#)^[117], Microsoft Excel 2007, [CSV](#)^[118], [Text](#)^[119], [HTML](#)^[118], [XML](#)^[119], Microsoft Word, Microsoft Word 2007, Microsoft Access, OpenDocument Spreadsheet, OpenDocument Text, DBF, PDF, RTF, DIF, SYLK, and LaTeX.

Microsoft Excel

The [Data Format](#) tab contains general options, which allow you to adjust the format for each kind of Excel cells. This means that you can specify such parameters as font, borders, filling color and method, etc. for each entity (such as data field, header, footer, caption, data, hyperlink and so on) separately. Also it is possible to create styles to make target Excel file be striped by columns or rows (the [Styles](#) tab).

The [Extensions](#) tab provides a possibility to add hyperlinks and notes to any cell of target file. Click the [Plus](#) button to add a new hyperlink or note to target Excel sheet and adjust its parameters. Click the [Minus](#) button to delete added hyperlink or note.

The [Advanced](#) tab allows you to define page header, page footer and title for target Excel sheet.

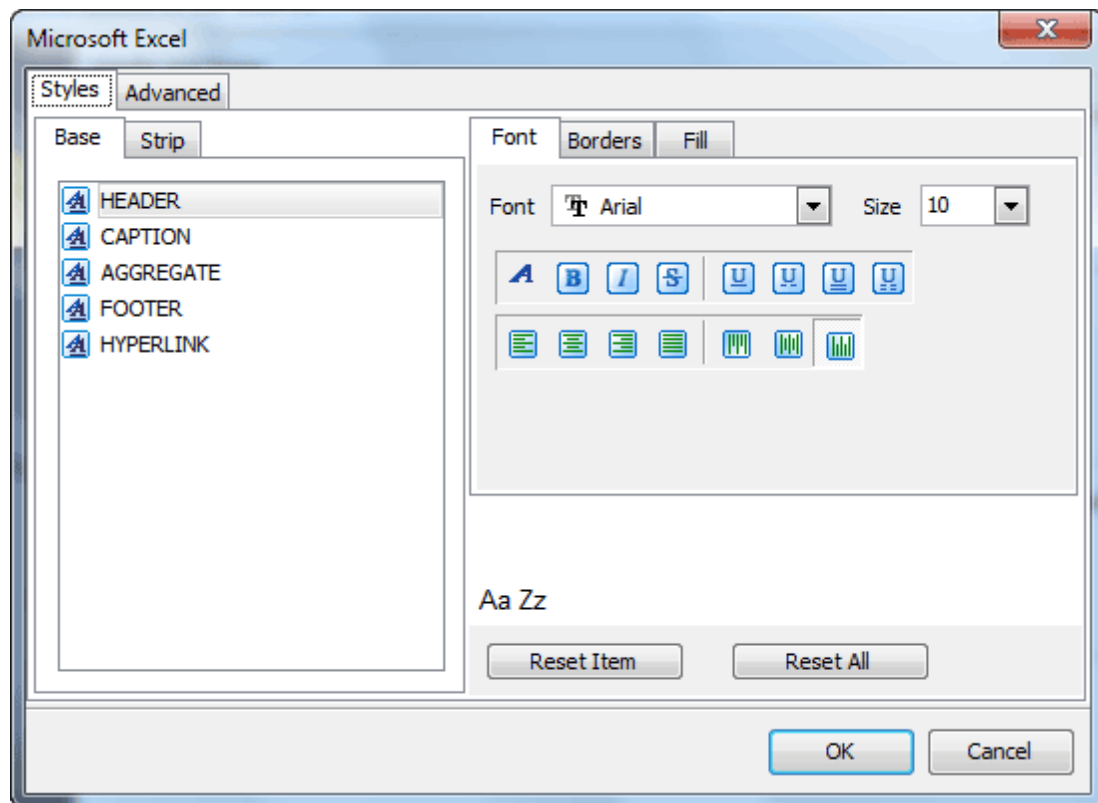


HTML

The **Preview** tab allows you to select the style of HTML file from a number of built-in templates provided by the **Templates** combo box. You can choose any of these templates, customize it by clicking on objects in the preview panel, and save it as a custom template using the **Save template** button. Use the **Load template** button to load previously saved custom templates from hard disk.

The **Basic** tab allows you to specify basic parameters of target HTML file, such as its title, cascade style sheet options, etc.


The **Multi-file** tab provides you with a possibility to split target HTML file into several separated files. This tab allows you to specify the record count for a single file, set an option to generate an index HTML file, and add an ability of navigation between each other to each of exported files.

The **Advanced** tab contains such HTML options as default font, background, cell padding and spacing, etc.

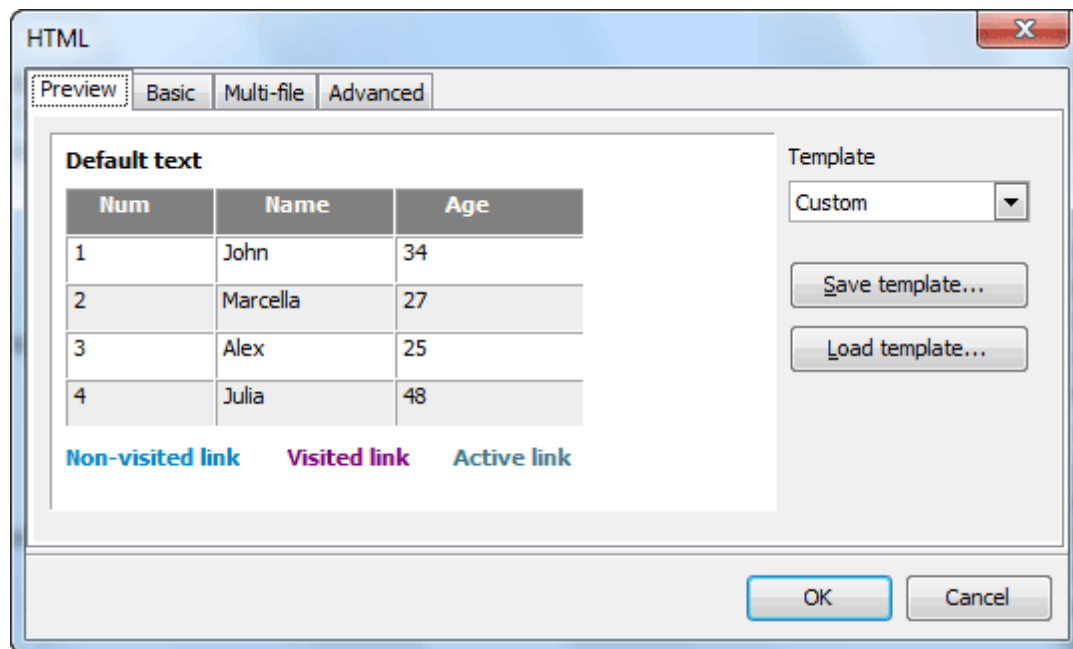


Text files

Set the [Calculate](#) column width options on if you want each column of target file to be adjusted to the maximum number of characters in it. The [Spacing](#) option specifies the number of spaces between columns in the target file.

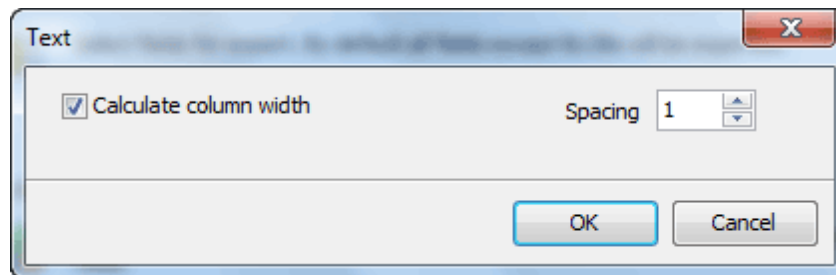


CSV files

You can specify column separator and optional values quote character for the target file on this step.

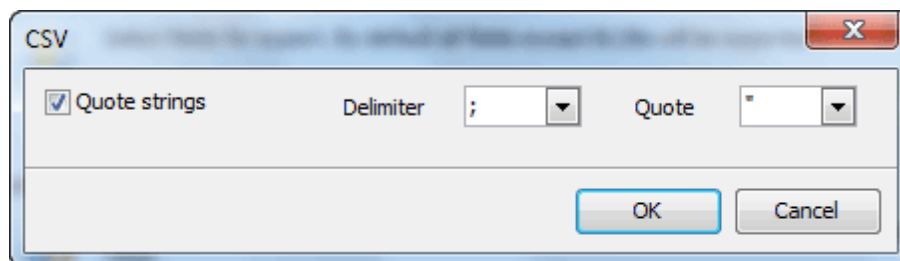

XML documents

Specify XML document encoding in the [Encoding](#) edit box and set the Standalone option on if you wish the target document to be standalone.

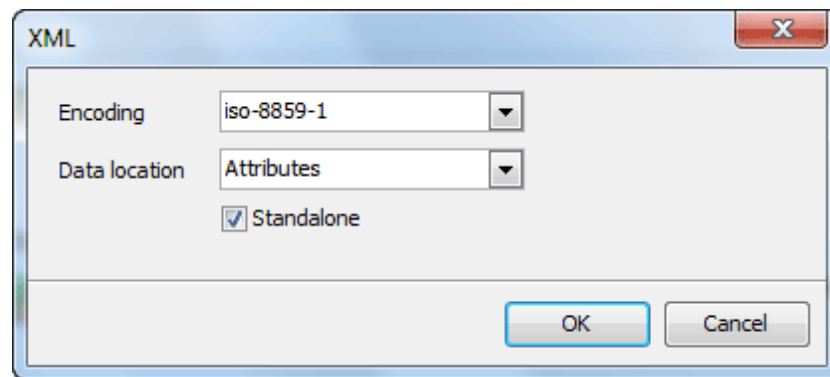

7.3.6 Setting common export options

Use this step to specify options to be applied to all exported data:

- Select the number of records to be exported from each table: a fixed number or all records.
- Specify actions to be executed after the export. To open the result files in the associated program (MS Excel, Notepad, default browser, etc), check the [Open file](#) box. To send the result files to the default printer, use the [Print file](#) checkbox.

A screenshot of a dialog box with two sections: 'Constraints' and 'Actions'. The 'Constraints' section has a printer icon and the text 'Specify the number of records to export.' It contains two radio buttons: 'Export all records' (selected) and 'Export only first' (unselected). Next to 'Export only first' is a numeric spinner set to '100' followed by the text 'record(s)'. The 'Actions' section has a folder and gear icon and the text 'Select actions to be executed after export.' It contains two checkboxes: 'Open file' (checked) and 'Print file' (unchecked).

7.4 Get SQL Dump

[Get SQL Dump Wizard](#) allows you to export data from a table or a query result to the SQL script as a number of INSERT statements.

In order to get a SQL dump from a table or a query:

- open the table in [Table Editor](#) or open and execute query in [SQL Editor](#) or [Query Builder](#);
- open the [Data](#) tab or the [Result](#) tab respectively;
- use the [Get SQL Dump](#) item of the [Navigation Bar](#).


- [Selecting fields to include in the result INSERT statement](#) ^[121]
- [Specifying dump options](#) ^[122]

See also: [Export Data Wizard](#) ^[114], [SQL Script Editor](#) ^[133]

7.4.1 Selecting fields

The first wizard step allows you to specify the table name as it will be included in the result script.

You can also select the fields to be included in the result *INSERT* statement. All the table fields are included into the [Selected fields](#) list by default. If you do not want some fields to be exported, move them back to the [Available fields](#) list. *Text*, *GUID*, *Date*, *Time*, and *DateTime* columns are included in the result *INSERT* statements according to the [Storage Options](#) of the [Database Profile](#)^[26].

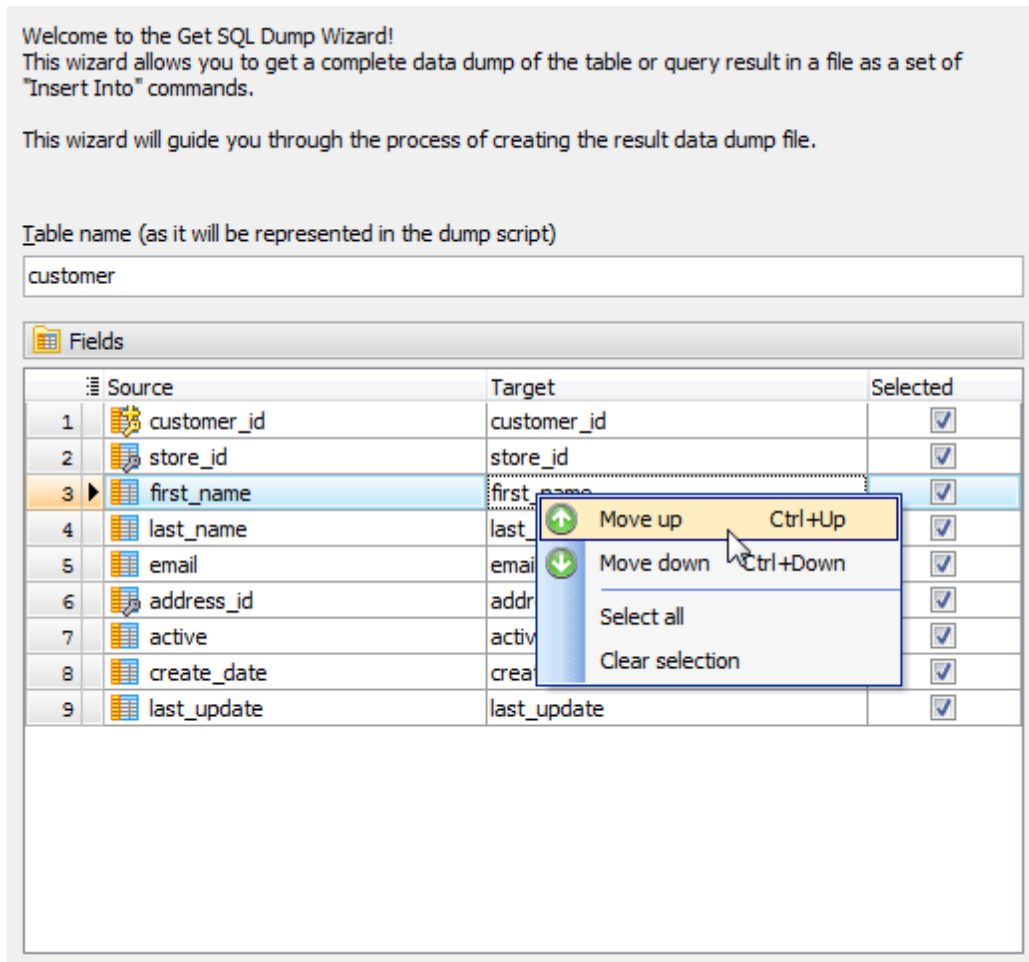

7.4.2 Specifying dump options


Select the data dump mode to be used ([Multi-row INSERT statements](#) or [separate single-row INSERT statements](#)) and specify commits' frequency.

To add the "CREATE TABLE" to the top of the dump, check the corresponding box.

Get SQL Dump Wizard allows you to send the result script to [SQL Script Editor](#)^[133] or to save it to a specified file. Select the [Send to script editor](#) option to load the result to the editor. To save the result to the file, enter the script file name (*.sql).

Click the [Ready](#) button to start the process.

Data script

 Specify the data dump options.

☒ Use multi-row INSERT statements



Record count per each statement

☐ Commit after each statement

☐ Use separate single-row INSERT statements

Commit after

Statement syntax

  dump

Output

☒ Send to script editor

☐ Save to file

File name ...

Encoding

Click "Ready" to dump your data.

7.5 Import Data Wizard

[Import Data Wizard](#) provides you with a graphical user interface to import data from the most popular files formats into existing database tables. It allows you to adjust data formats, empty target tables, execute custom SQL scripts, etc.

Import Data tool supports:

- Microsoft Office Excel 95-2003
- Microsoft Office Excel 2007
- Microsoft Office Access
- Microsoft Office Access 2007
- Delimiter-separated values (CSV, DSV, TSV)
- DBF
- Text files
- XML
- ODBC data sources (any database accessible via an ODBC driver or OLE DB provider, such as SQL Server, MySQL, Oracle, MS Access, Sybase, DB2, PostgreSQL, etc.)

In order to run the wizard you should

- open the table in [Table Editor](#);
- go on to the [Data](#) tab;
- select the [Import Data](#) item from the [Navigation Bar](#).

To import data,

- [Set the format](#)^[125] of the input data and the source file name;
- [Map source file columns and target table fields](#)^[127];
- [Specify other import options](#)^[130].

Source format

Select one of the available source formats.

- ☒ Microsoft Office Excel 97 - 2003
- ☐ Microsoft Office Excel 2007
- ☐ Microsoft Office Access
- ☐ Microsoft Office Access 2007
- ☐ Delimiter-separated values (CSV, DSV, TSV)
- ☐ Text file (Fixed-width columns)
- ☐ DBF
- ☐ XML
- ☐ ODBC data source

Source file

Select or enter the source file name and specify the encoding if necessary.

| | | |
|----------------------------|------------------------------------|------------------|
| File name | Password | Encoding |
| D:\Data\Excel\employee.xls | | ANSI |
| Connection string | Identifier quote characters | |
| | None (table_name) | |
| Data source | Data location | Delimiter |
| Employee_list | Attributes | |
| | | Quote |
| | | |

See also: [Export Data Wizard](#)

7.5.1 Setting source file name and format

1. Select the format of the source file.
2. Specify the file you want to import. The file name extension in the **File name** box varies according to the selected import type. The wizard allows you to import data from several files at a time.

To import data from multiple files with the same structure, set the mask of the file names to the corresponding field. To see the list of matching files, use with the button on the right.

Example 1:

Suppose, you need to import data from the following tables:


D:\Data\Excel\country1.xls

D:\Data\Excel\country2.xls

D:\Data\Excel\country3.xls

D:\Data\Excel\country4.xls

The mask for these file names is *D:\Data\Excel\country*.xls*.

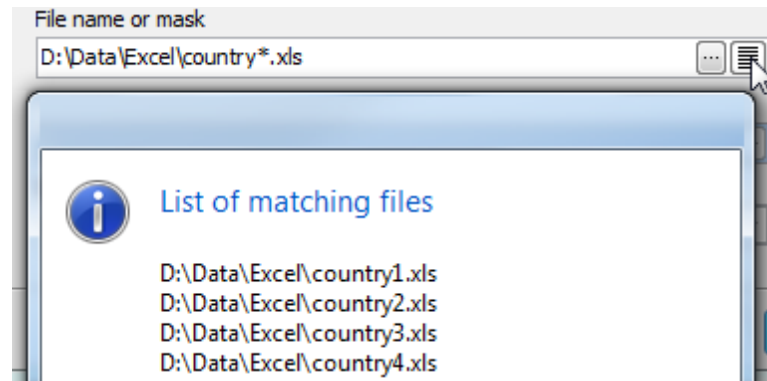

3. For ODBC data sources specify the [connection_string](#) to be used to connect to the data source.
4. Select the data source to import: a table of MS Access database or a spreadsheet of MS Excel.
5. Enter the password to the database (MS Access).
6. For CSV file set the delimiter and quote characters.
7. Select source file [Encoding](#).
8. For .XML files, define the [XPath](#) to the data to be imported to the selected table and select whether data is stored in Attributes or in Subnodes.

Example 2:

To import data from the following .xml file, use XPath=/Employees/Employee and Data location=Subnodes

```
<?xml version="1.0" encoding="utf-8"?>
<Employees>
  <Employee>
    <ID>1</ID>
    <FirstName>Klaus</FirstName>
    <LastName>Salchner</LastName>
    <PhoneNumber>410-727-5112</PhoneNumber>
  </Employee>
  <Employee>
    <ID>2</ID>
    <FirstName>Peter</FirstName>
    <LastName>Pan</LastName>
    <PhoneNumber>604-111-1111</PhoneNumber>
  </Employee>
</Employees>
```

Example 3:

To import data from the .xml file below, use XPath=DATAPACKET/Data/Item and Data location=Attributes

```
<?xml version="1.0"?>
```

```
<DATAPACKETVersion="2.0">
<Data>
  <Item ID="1" FirstName="Klaus" LastName="Salchner" PhoneNumber="410-727-
5112" />
  <Item ID="2" FirstName="Peter" LastName="Pan" PhoneNumber="604-111-1111" />
</Data>
</DATAPACKET>
```

7.5.2 Setting the accordance between source and target columns

The wizard provides you with several ways to map input data to the target table columns.
















- You can map columns automatically by order with the [Auto Fill](#) and [Auto fill all maps](#) buttons.
- You can do it manually using the drop-down list of [Source column](#) fields.
- To map columns visually, open [Map builder](#)^[128] with the [Build map](#) link.


It's useful to save a specified map to a file for further using it in the next wizard sessions. To save a map, use the [More...](#) button and follow the [Save map](#) link.


To see the 100 first rows of input file or output table, use the [More...](#) button and follow the [View source data](#) or [Preview results](#) links respectively.

You can also specify [Replacements](#) to be applied to the selected column before the import and [data format masks](#)^[129] used for the input file.

To exclude the first file row, use the [File contains column header](#) checkbox.

| Columns | | | | |
|---------|--|---------------|--------------|---|
| | Target field | Source column | Replacements | Empty values interpretation |
| 1 |  film_id | A | | |
| 2 |  title | B | | As Null  |
| 3 |  description | C | | As Null |
| 4 |  release_year | D | | |
| 5 |  language_id | E | | |
| 6 |  original_language_id | F | | |
| 7 |  rental_duration | G | | |
| 8 |  rental_rate | H | | |
| 9 |  length | I | | |
| 10 |  replacement_cost | J | | |
| 11 |  rating | K | | As Null |
| 12 |  last_update | L | | |
| 13 |  special_features | M | | As Null |
| 14 |  fulltext | | | As Null |












☐ File contains column headers

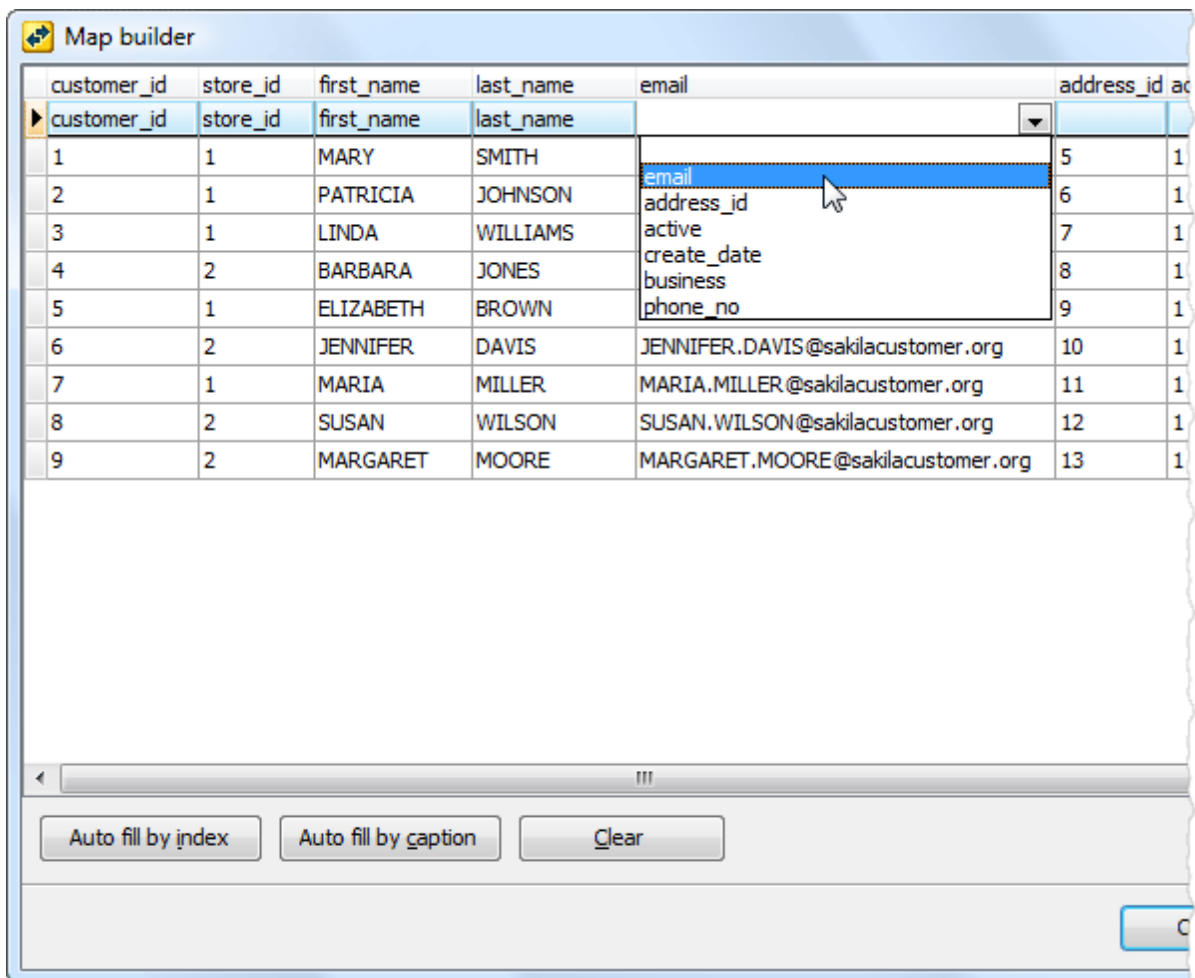7.5.2.1 Map builder

To specify the accordance between source and target columns visually, use popup menu of the upper row to map source file columns to target table fields.



For text files define columns bounds first. To add a bound, double-click near the column data in the builder area. To map a column to a target table field, select the field in the **Target field** list and then click between the bounds.

| | Target field | Offset | Width |
|---|---|--------|-------|
| 1 |  customer_id | 0 | 5 |
| 2 |  store_id | 5 | 6 |
| 3 |  first_name | 11 | 46 |
| 4 |  last_name | 57 | 46 |
| 5 |  email | 103 | 52 |
| 6 |  address_id | 155 | 6 |
| 7 |  active | 161 | 6 |
| 8 |  create_date | 167 | 6 |

| | 0 | 10 | 20 |
|---|-------|-------|------------|
| | custo | store | first_name |
| 1 | 1 | 1 | MARY |
| 2 | 1 | 1 | PATRICIA |
| 3 | 1 | 1 | LINDA |
| 4 | 2 | 2 | BARBARA |
| 5 | 1 | 1 | ELIZABETH |
| 6 | 2 | 2 | JENNIFER |
| 7 | 1 | 1 | MARIA |

7.5.2.2 Data formats

Use the window fields to indicate format masks of the source data imported to the table. It allows the application to import data correctly.

The components of the date time format mask are represented at the window. Compose

your date, time, and date time format mask of this components and separators. The following table contains some types of input fields and suggests masks to import them.

| To import these input data correctly | Use these format masks |
|--------------------------------------|------------------------|
| June 29 | mmm dd |
| Jun 29, 2009 | mmm dd, yyyy |
| Tue Jun 14 16:50:49 | ddd mmm dd hh:nn:ss |
| 01/15/09 08:26 AM | mm/dd/yy h:nn ampm |

You can also set decimal and thousand separators, and custom NULL, TRUE and FALSE values. If you have several values to be imported to NULL(TRUE, FALSE) value, use semicolons to separate them.

| | | | | | | | | | | | | | | | | | | |
|---|-------|------|--|------|--|-----------|--|---------|---|----------|------|--------------|------|---------------|-------|-------------|-------|---|
| <div> <div>Formats</div> <table> <tr><td>Date</td><td></td></tr> <tr><td>Time</td><td></td></tr> <tr><td>Date time</td><td></td></tr> </table> <div> <div>Separators</div> <table> <tr><td>Decimal</td><td>,</td></tr> <tr><td>Thousand</td><td>#160</td></tr> </table> <div> <div>Other (use semicolon to separate values)</div> <table> <tr><td>Boolean true</td><td>True</td></tr> <tr><td>Boolean false</td><td>False</td></tr> <tr><td>Null values</td><td>;NULL</td></tr> </table> </div> </div> </div> | | Date | | Time | | Date time | | Decimal | , | Thousand | #160 | Boolean true | True | Boolean false | False | Null values | ;NULL | <div>Date time formats</div> <div> dd the day as a number with a leading zero or space (01-31). ddd the day as an abbreviation (Sun-Sat) dddd the day as a full name (Sunday-Saturday) mm the month as a number with a leading zero or space (01-12). mmm the month as an abbreviation (Jan-Dec) mmm the month as a full name (January-December) yy the year as a two-digit number (00-99). yyyy the year as a four-digit number (0000-9999). hh the hour with a leading zero or space (00-23) nn the minute with a leading zero or space (00-59). ss the second with a leading zero or space (00-59). zzz the millisecond with a leading zero (000-999). ampm Specifies am or pm flag hours (0..12) ap Specifies a or p flag hours (0..12) </div> |
| Date | | | | | | | | | | | | | | | | | | |
| Time | | | | | | | | | | | | | | | | | | |
| Date time | | | | | | | | | | | | | | | | | | |
| Decimal | , | | | | | | | | | | | | | | | | | |
| Thousand | #160 | | | | | | | | | | | | | | | | | |
| Boolean true | True | | | | | | | | | | | | | | | | | |
| Boolean false | False | | | | | | | | | | | | | | | | | |
| Null values | ;NULL | | | | | | | | | | | | | | | | | |

7.5.3 Customizing common options

On the wizard step you can set the number of records to import, whether the tool import all table records or only the specified number. In the second case you can set the number of records to skip.

Logging

This options group let you to manage logging of the import process.

Scripts

There are many cases where the import process is necessary to correct with additional scripts. So to disable table indexes before the importing, specify the corresponding scripts to be executed before and after the process.

The typical example of usage of the [Before each table](#) and [After each table](#) scripts is the import data to autoincrement columns of several tables. In this case it's necessary to set the corresponding scripts:

```
SET IDENTITY_INSERT %table_name% ON
```

and

```
SET IDENTITY_INSERT %table_name% OFF
```

to be executed before and after import data to each table correspondingly.

8 Database Tools

AnySQL Maestro provides a number of powerful tools for working with databases.

The following tools are available:


- [SQL Editor](#)^[83]
Creates and executes SQL queries.
- [Visual Query Builder](#)^[88]
Builds queries visually.
- [Script Runner](#)^[132]
Executes SQL scripts to the database.
- [SQL Script Editor](#)^[133]
Allows to edit and execute SQL scripts.
- [Generate Database Report Wizard](#)^[135]
Generates the database HTML or PDF report for structure of selected object in a whole or partially.
- [BLOB Viewer](#)^[137]
Displays a content of BLOB fields in different representations.
- [Diagram Viewer](#)^[143]
Represents data from a table or a query as a diagram in various ways.
- [Data Analysis](#)^[147]
Allows to slice and dice information efficiently according your business rules.
- [Report Designer](#)^[152]
Prepares data for reading, viewing, and printing in a polished look.
- [Schema Designer](#)^[159]
Allows to represent database tables and relationships as ER diagrams.
- [SQL Generator](#)^[164]
Provides you with a set of simple SQL statements.
- Simple tools for and [Updatable views](#)^[165]

8.1 Script Runner

Script Runner is designed for executing of SQL scripts that don't require modifications. The window can be invoked from the **Tools** menu or with the **Execute script from file** link of **SQL Script Editor**^[133].

Script Runner allows to execute .sql files as well as archived scripts directly from .zip files. In case archived files this tool unpacks zip archives to temporary files by itself for further executing. The tool neither starts any implicit transactions before executing the script nor issues COMMIT or ROLLBACK commands after the executing.

To execute a script with Script Runner, set the file name and the **Stop execution on error** option value. This option allows to view all the execution errors (OFF). The specified script will be executed immediately on the database which name is represented at the top of the window.

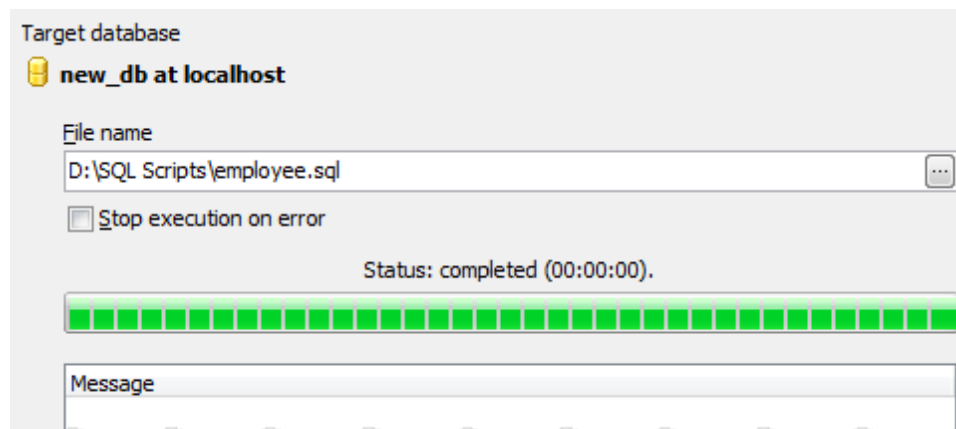


8.2 SQL Script Editor

[SQL Script Editor](#) is designed for SQL scripts editing and executing. The editor does not display results of SELECT queries. To work with such queries' data, use [SQL Editor](#)^[83]. If you have a script that is ready to use, execute it with [Script Runner](#)^[132]. To open [SQL Script Editor](#), select the [Tools | SQL Script Editor](#) main menu item.

To work with a script within SQL Script Editor, load it from an `.sql` file or type it in the editor area directly. To prevent mistakes in SQL syntax, the editor supports syntax highlighting, code completion and divides the script text into logical parts that can be individually collapsed or expanded (code folding). All the logical parts are represented at the [Explorer](#) at the [Navigation bar](#). It allows you to transfer to the proper script fragment quickly by clicking the corresponding node in the tree.


SQL Script Editor allows you to execute the whole SQL script or only its selected part. To make the executing of a large script much faster, execute the script directly from a file with [Script Runner](#)^[132]. By default, if a user opens a file larger than 100K, SQL Script Editor will suggest him to execute the script file without opening it in the editor. This file size may be changed at the editor's [options](#)^[182] tab.

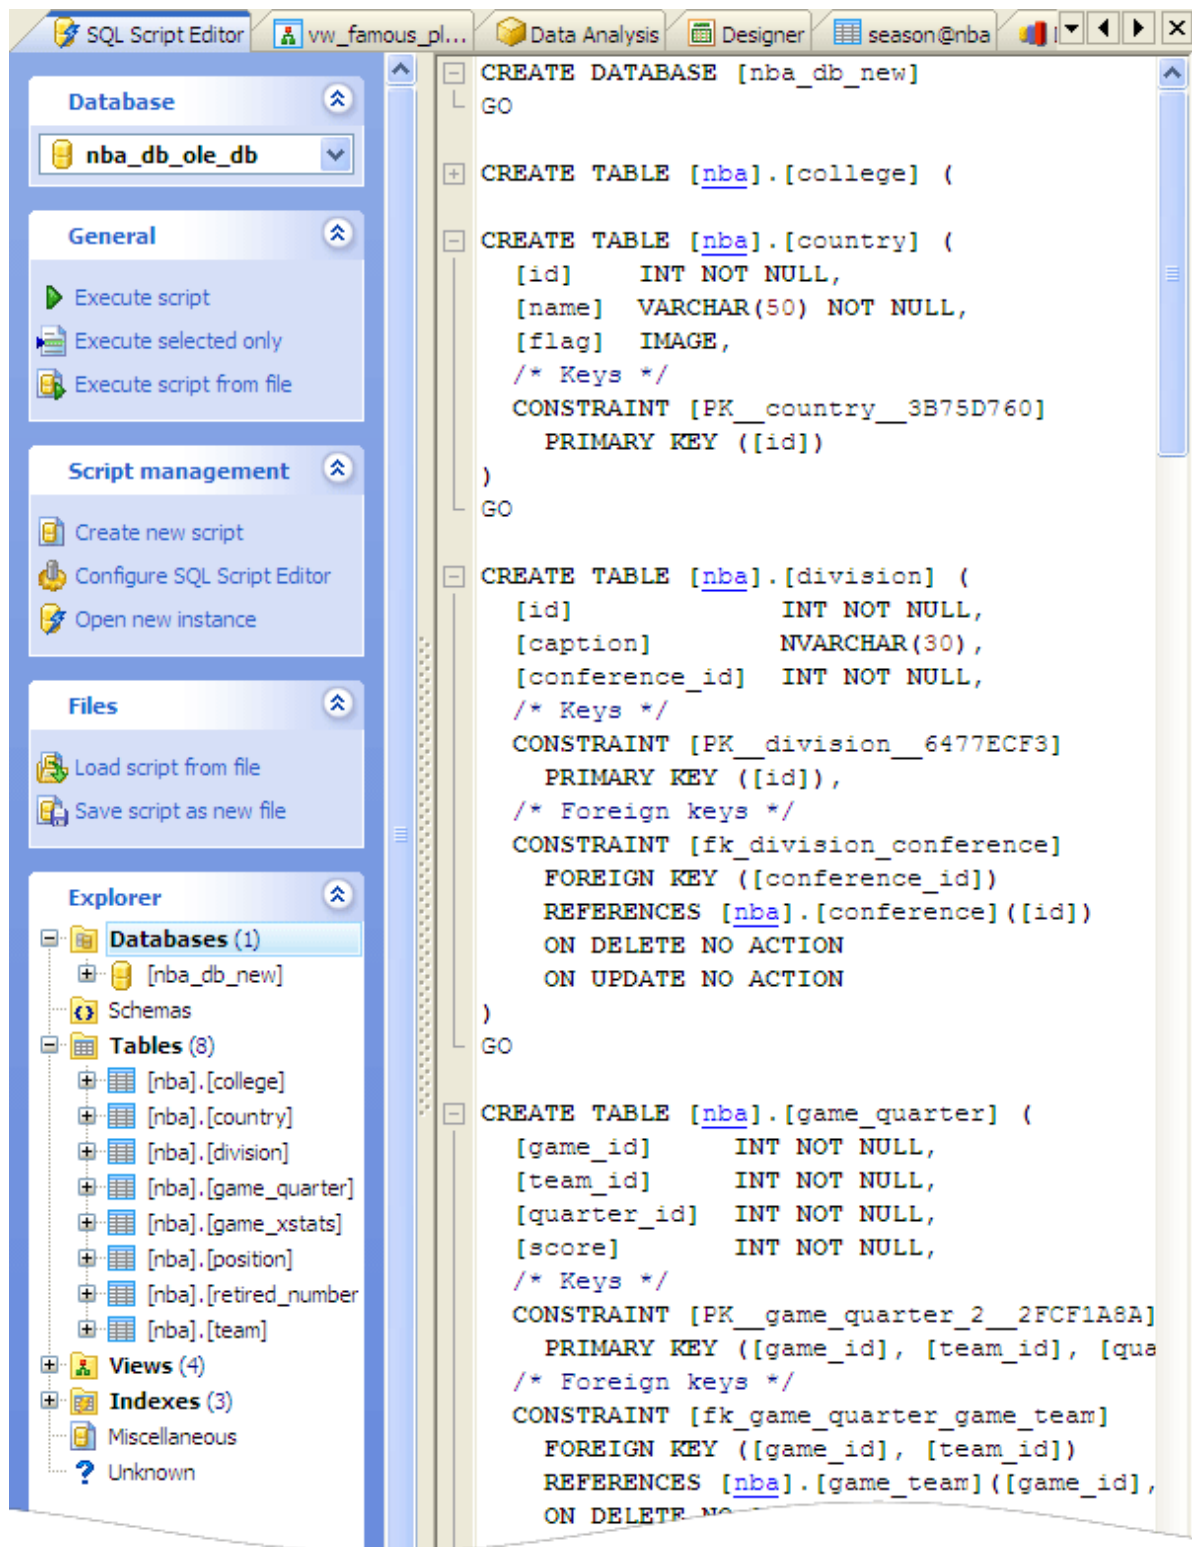

8.3 Generate Database Report


With the help of [Generate Database Report Wizard](#) you can create HTML or PDF report for the structure of the selected object in the whole or partially. To run this wizard select the [Tools | Generate Database Report](#) main menu item.

- [Selecting reporting elements and setting other report options](#)^[135]
- [Specifying reporting objects and editing styles](#)^[135]

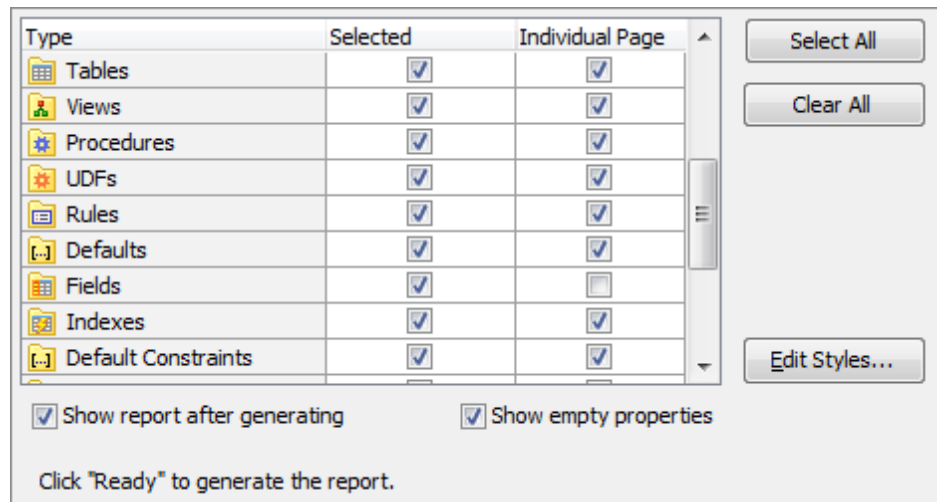

8.3.1 Selecting reporting elements and setting other report options

Select the [report object](#) and the [report format](#) items, set the [report title](#) and the [report path](#) options in the respective boxes.

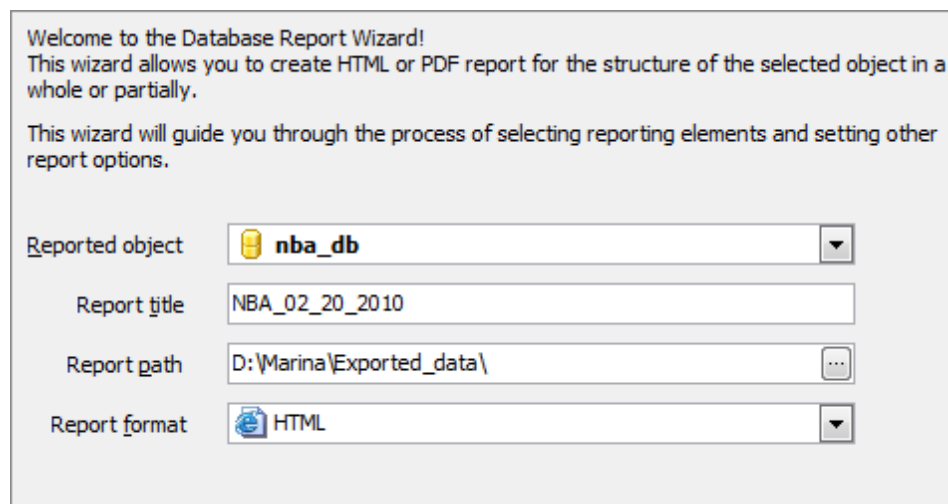

8.3.2 Reporting objects and editing styles options

This step allows you to select the essential objects to report and to specify the output format and style using [Report Style Editor](#)^[136].

- ☒ Show report after generating

If checked, opens the result files in the associated program after making the report.

☒ **Show empty properties**

If checked, allows you to report objects even if they are empty.

| Type | Selected | Individual Page |
|---------------------|-------------------------------------|-------------------------------------|
| Tables | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> |
| Views | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> |
| Procedures | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> |
| UDFs | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> |
| Rules | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> |
| Defaults | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> |
| Fields | <input checked="" type="checkbox"/> | <input type="checkbox"/> |
| Indexes | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> |
| Default Constraints | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> |

☒ Show report after generating
 ☒ Show empty properties

Click "Ready" to generate the report.

Select All
 Clear All
 Edit Styles...

8.3.3 Editing database report style

Using [Report Style Editor](#) you can specify style properties of a report including font size, color and name for different elements.

Report Style Editor

Page Body
 Database name
 Page Title
 Table
 Table Header
 Table Cell
 Table Cell Image
 Caption
 Base Text
 Definition
 Comment
 Copyright
 Header Line
 Param Table
 Param Table Caption
 Param Table Text
 Link
 Visited Link
 Link Hover
 Param Table "No Value"

Style Properties

Color:

Font

Name: A Arial

Size: 8

Color: Black

Border

Style: Solid

Color:

database

Schema "public"

Owner: admin

Authorization: (no value)

Tables base text

| Table | Schema |
|--------|--------|
| table1 | public |

Generated by "SQL Maestro"

Restore Styles Save As Default Close Help


8.4 BLOB Viewer

BLOB Viewer allows you to view the content of the BLOB fields in various representations.

- [Viewing BLOB field as hexadecimal dump](#)^[137]
- [Viewing BLOB field as plain text](#)^[138]
- [Viewing BLOB field as graphical image](#)^[139]
- [Viewing BLOB field as HTML](#)^[140]
- [Viewing BLOB field as PDF](#)^[141]


See also: [BLOB Editor](#)^[109]

BLOB Viewer also allows you to save all BLOBs from a table or view to a given directory. Just click [Save to files](#) on the [Navigation bar](#) and fill all fields in the [Export BLOBs](#) window shown below. You can use table columns' names enclosed in % as a file name template.

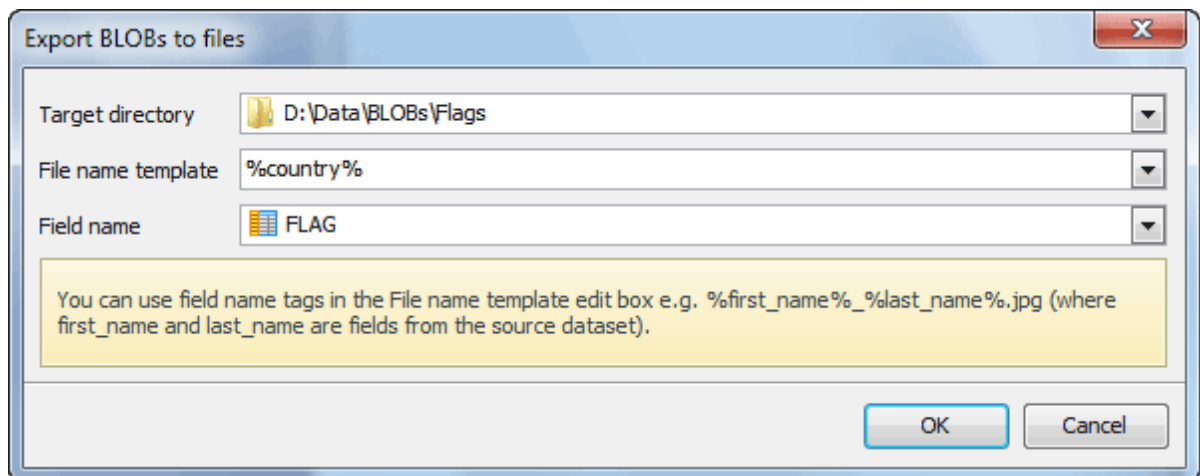


8.4.1 Viewing as hexadecimal dump

The [Hexadecimal](#) panel allows you to view data in hexadecimal mode.

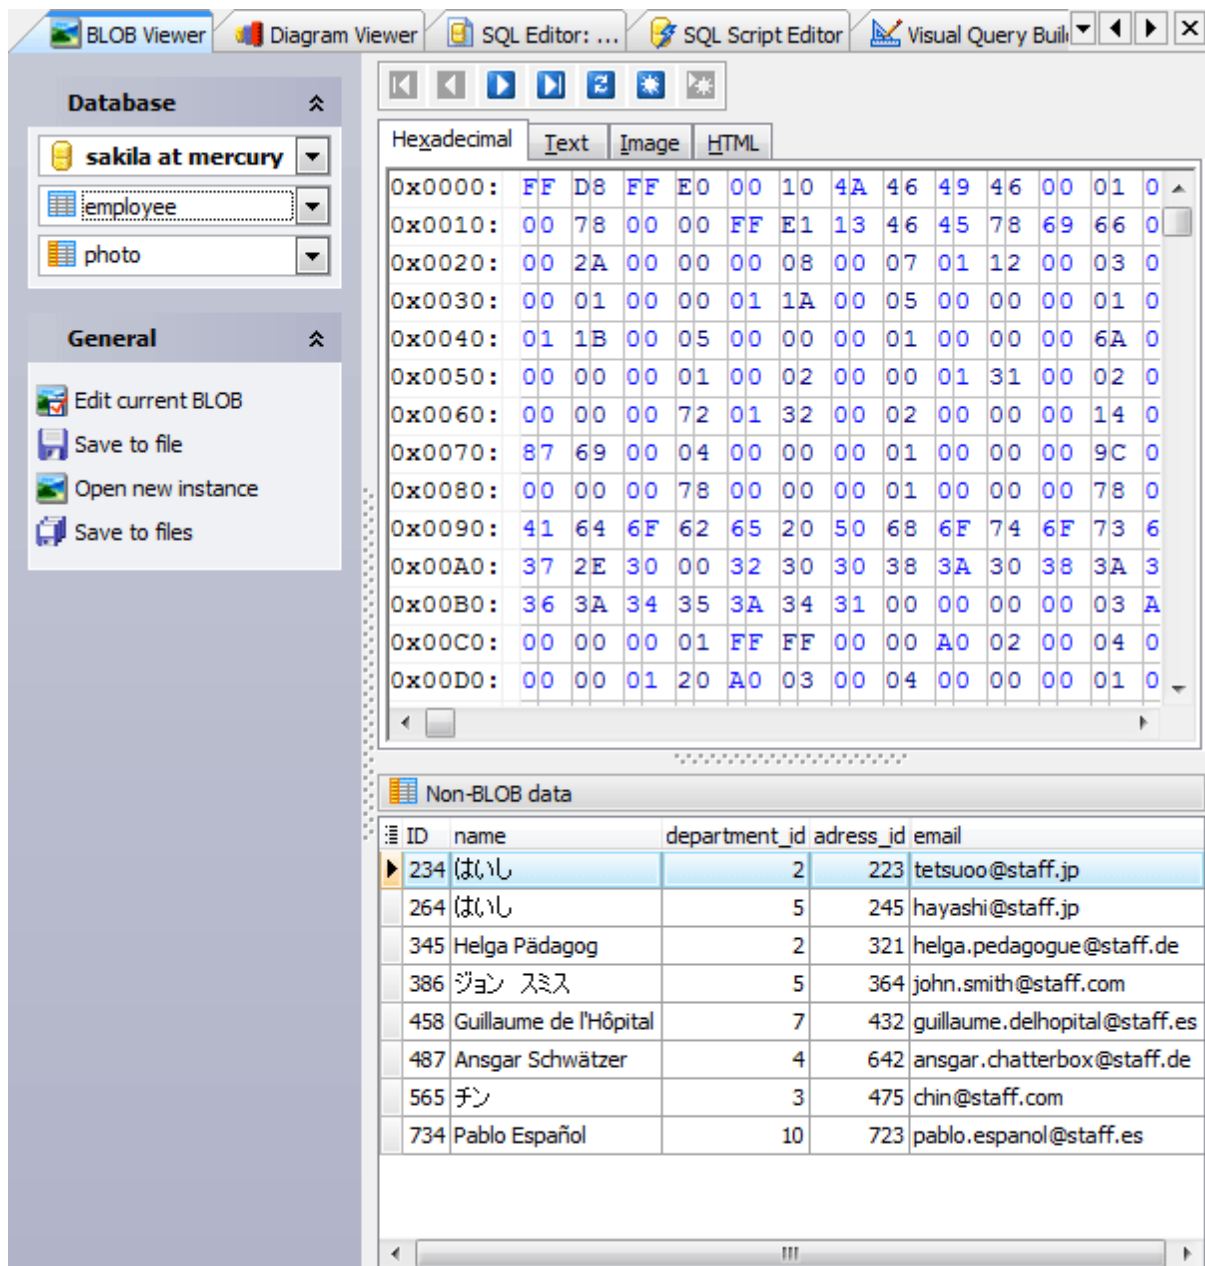


8.4.2 Viewing as plain text

The **Text** panel allows you to view data as simple text. For your convenience several types of text highlighting are available (*Plain text*, *HTML*, *JScript*, *CSS*, *PHP*, *XML*, *SQL*, and *SQLite DDL*). The popup menu of the panel provides you to **Find** or **Replace** a necessary text fragment.

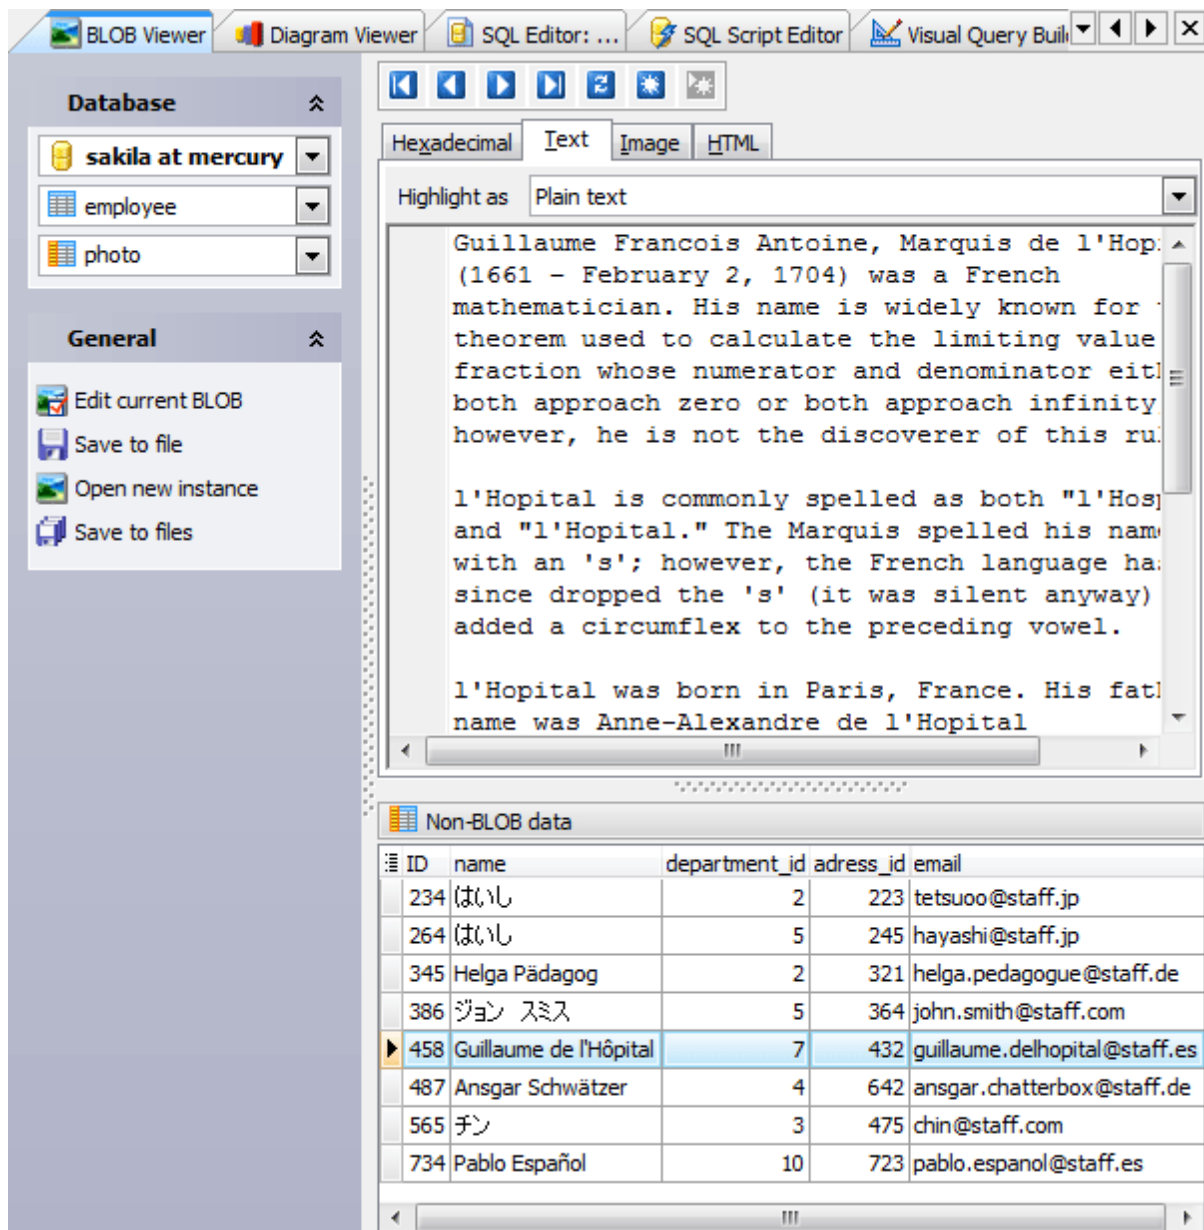


8.4.3 Viewing as image

The [Image](#) panel displays field data as image.

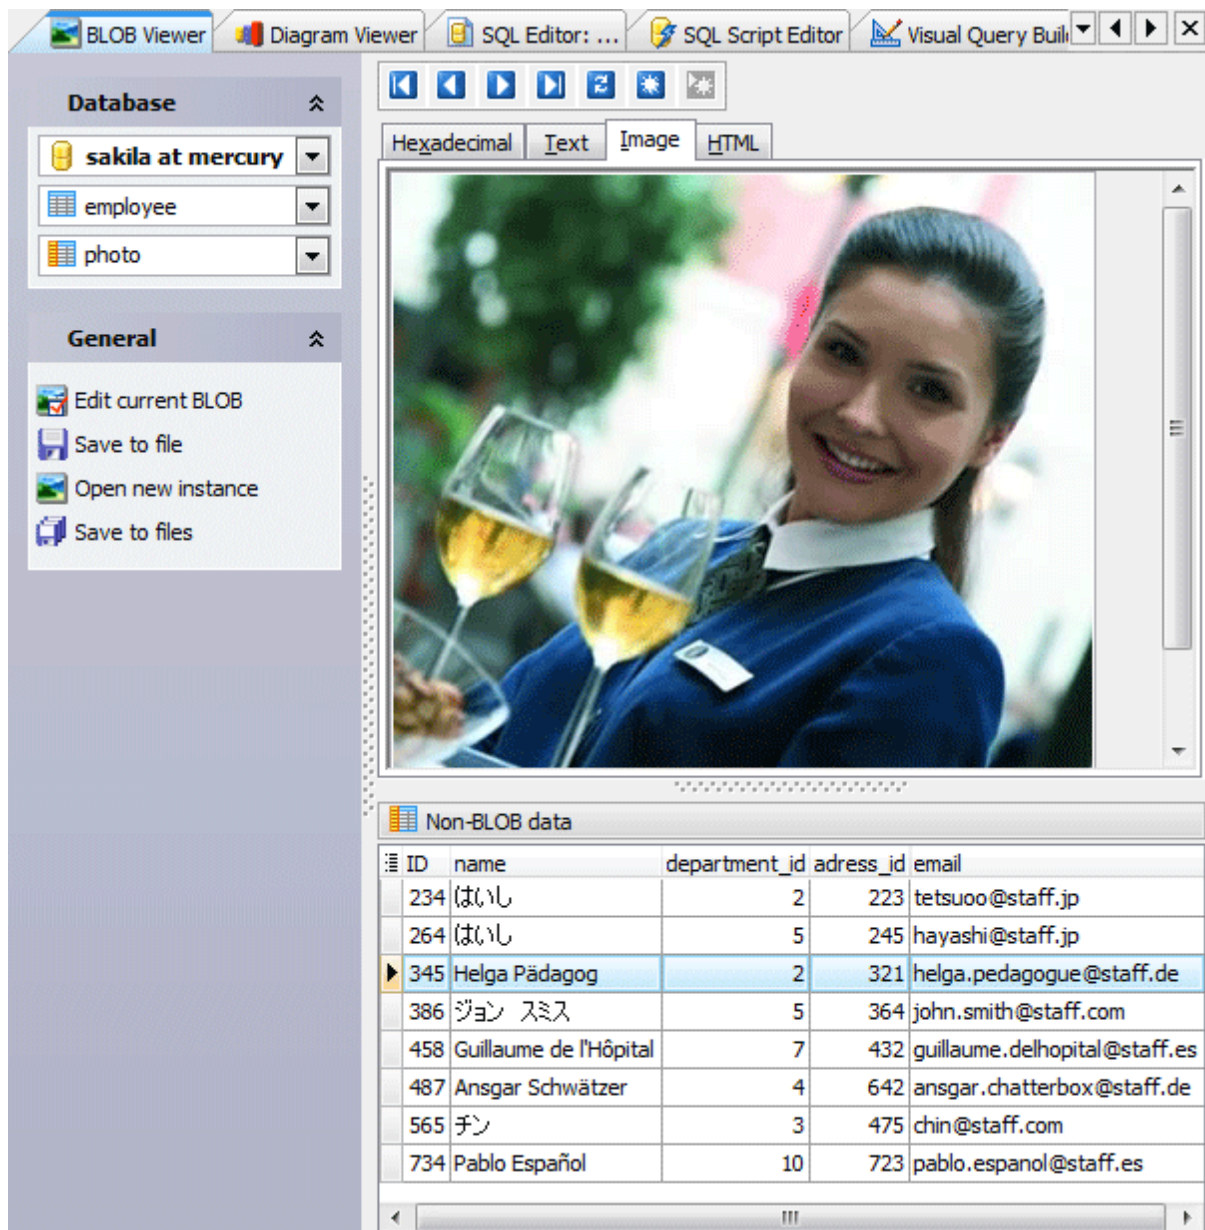

8.4.4 Viewing as HTML

The [HTML](#) panel displays field data as HTML.

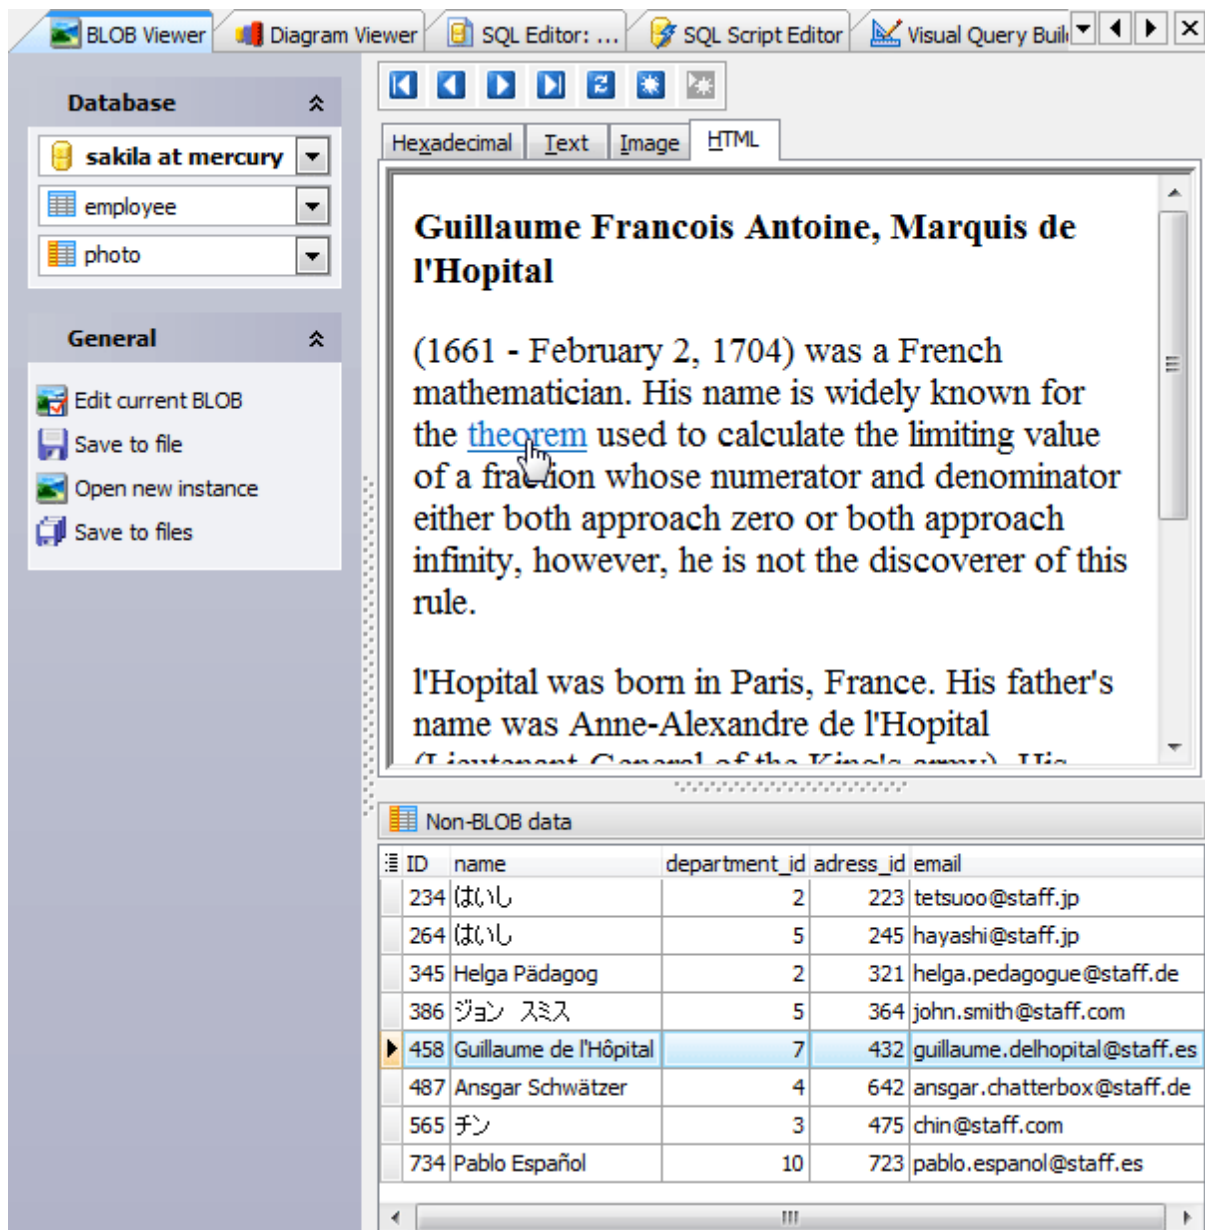

8.4.5 Viewing as PDF

The PDF panel allows you to browse PDF data stored in the database.

The screenshot displays the AnySQL Maestro application window. The top toolbar includes icons for BLOB Viewer, SQL Script Editor, Data Analysis, Visual Query Builder, and Designer. The left sidebar contains a 'Database' section with a tree view showing 'test_utf8 at d', 'public.software', and 'manual'. Below this is a 'General' section with buttons for 'Edit current BLOB', 'Save to file', 'Open new instance', and 'Save to files'.

The main content area shows a document titled 'PostgreSQL PHP Generator Help' (page 15 of 103). The document content includes:

2 Getting started

Connection properties
Set the [connection parameters](#) for the connection with.

Script connection properties
Specify here connection parameters for PostgreSQL. For example, if your webserver and PostgreSQL server are on the same host as localhost.

Projects
When working with a project, all the session parameters can be edited if necessary. To run a wizard, select a Project on the first wizard step and enter the project name. Projects are also available from this popup menu.

A 'Connection properties' dialog box is open, showing the option 'I can connect to the server directly or via SSH tunneling' with a link to 'Configure SSH options'.


At the bottom, the 'Non-BLOB data' table is visible:

| id | full_name | description_id |
|----|--------------------------|----------------|
| 1 | PostgreSQL PHP Generator | 1 |
| 2 | Code Factory for MySQL | 3 |
| 3 | SQLite DataWizard | 2 |
| 4 | MS SQL Maestro | 4 |

8.5 Diagram Viewer


Diagram Viewer is a tool for representing data from a table or a query as a diagram in various ways. This means you can build a diagram represented as bars, lines, areas, points or pies, colored or not, with axis visible or not; specify axis labels source, diagram header and more. The **Diagram Viewer** also has the [Export diagram image](#)^[145] and the [Export diagram data](#) features implemented, with a lot of formats supported.

- [Customizing diagram options](#)^[144]
- [Exporting diagram as a graphical image](#)^[145]

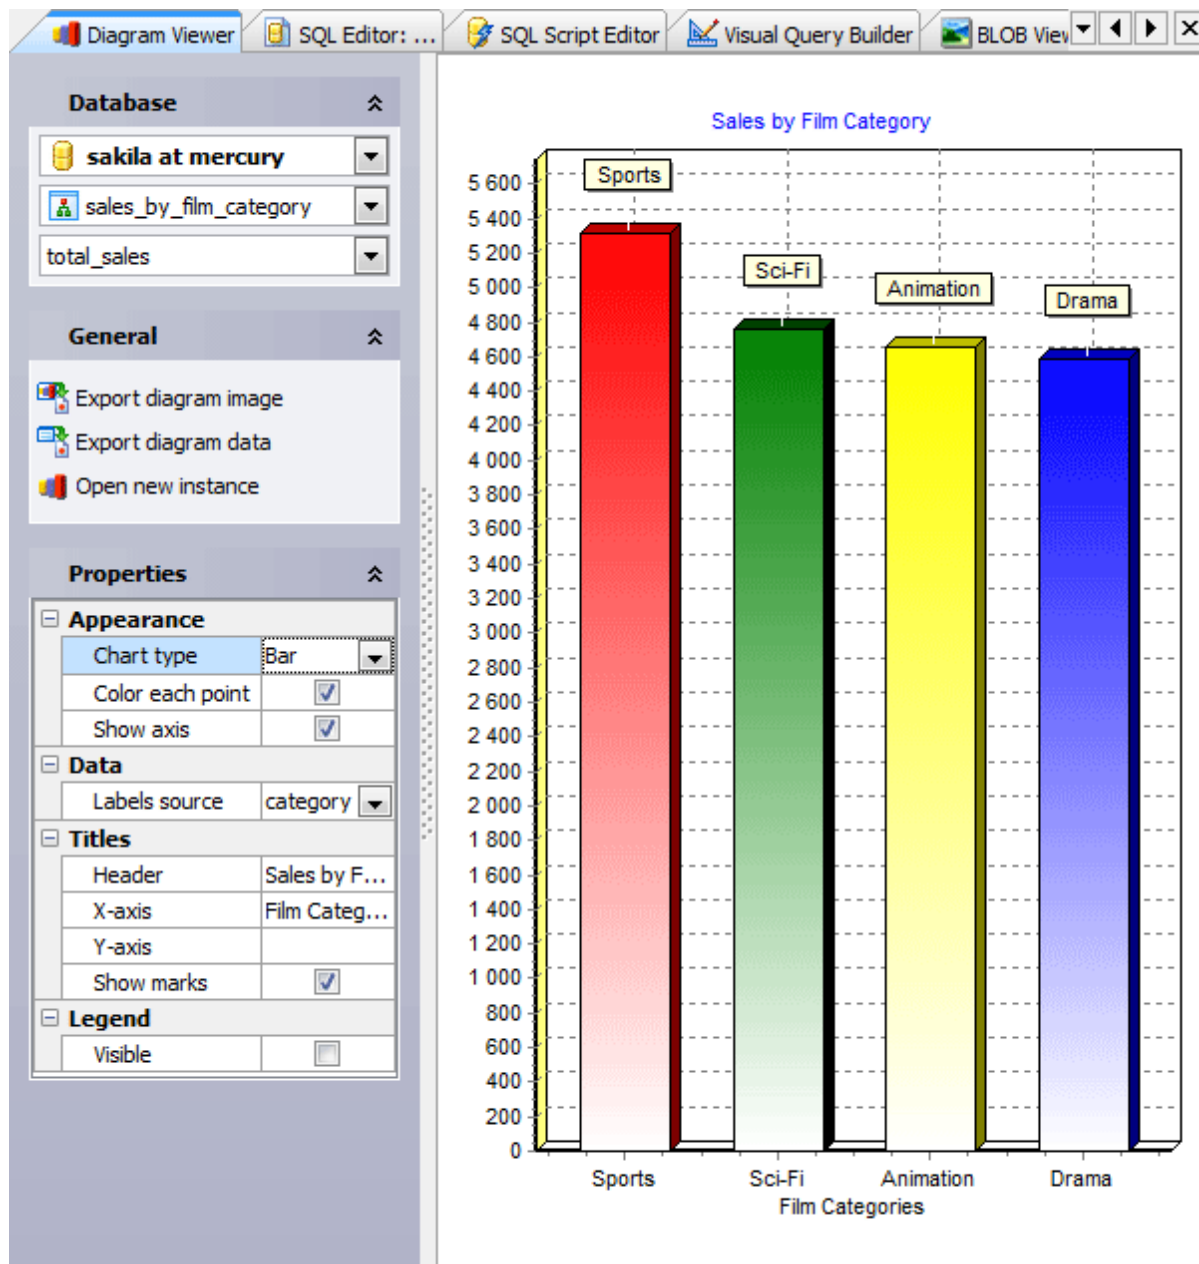

8.5.1 Customizing diagram properties

To build a diagram in [Diagram Viewer](#), you should select the source field(s) to be represented in the diagram first. Only numeric types of fields can be used in the diagram, and each selected field corresponds to a separated diagram series. Fields are selected by checking items in the third combo box from the top in the [Database](#) group of the [Navigation Bar](#). If the combo box is empty then either data source is not yet selected or it contains no numeric fields.

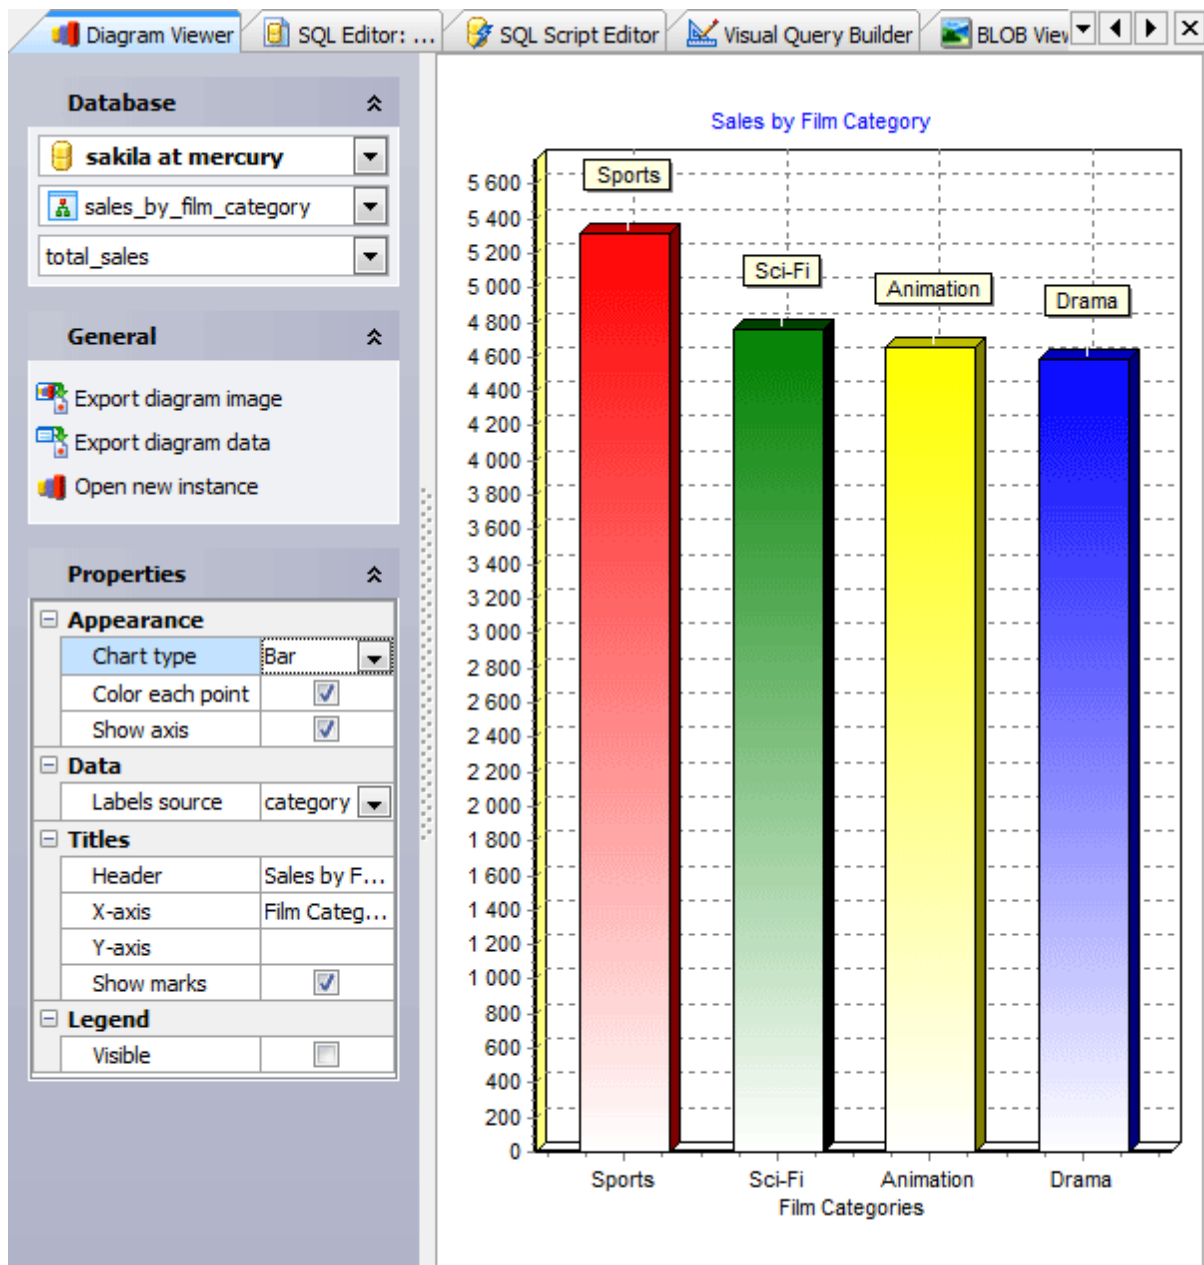

[Diagram Viewer](#) provides a special control for customizing the diagram properties. This control is located in the Properties group of the [Navigation Bar](#) and consists of four separate subgroups:

Appearance

Contains properties responsible for major diagram appearance:

- **Chart type** - defines a way of how the diagram will be represented: as bars, lines, areas, points, pies, or fast lines
- **Color each points** - if checked, each bar, point, line or sector of the diagram has an individual color; if not checked, all the points are colored red
- **Show axis** - defines if the diagram has the axis and background grid or not

Data

Contains the **Labels source** property which allows you to specify the field for X-axis labels as well as for diagram pointmarks .

Titles

Contains properties for defining titles for different parts of the diagram:

- **Header** - defines the title appeared on the top of the diagram
- **X-axis** and **Y-axis** - define the titles for diagram axis
- **Show marks** - defines if the diagram point marks are visible or not


Legend

The only **Visible** property of this subgroup specifies whether the legend rectangle should be represented on the right side of the diagram or not.

8.5.2 Exporting diagram image

Diagram Viewer provides an ability to export current diagram to a file as graphical image. This ability is constituted in **Export Diagram Wizard** which can be invoked by the **Export diagram image** item of the **Navigation Bar**.

Select the desired graphical format in the **Destination format** radio group and specify the file name in the **Destination file name** box.

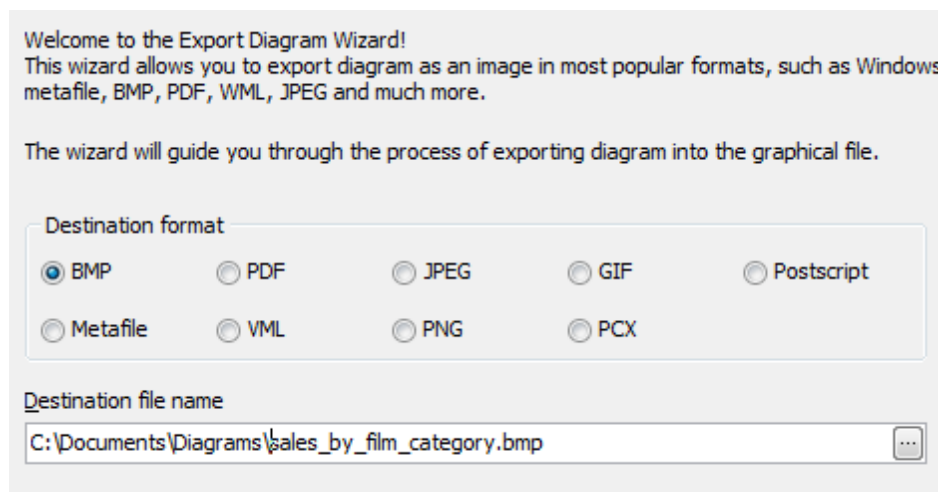

Welcome to the Export Diagram Wizard!
This wizard allows you to export diagram as an image in most popular formats, such as Windows metafile, BMP, PDF, WML, JPEG and much more.
The wizard will guide you through the process of exporting diagram into the graphical file.

Destination format

☒ BMP ☐ PDF ☐ JPEG ☐ GIF ☐ Postscript
☐ Metafile ☐ VML ☐ PNG ☐ PCX

Destination file name

C:\Documents\Diagrams\sales_by_film_category.bmp

Set the destination width and height by the corresponding spin edits. Check or uncheck the **Keep aspect ratio** option to keep the image ratio for exported image or not. Check the **Open exported image in associated program** option to view the image after the export is done.

Image size

Width

Height

☒ Keep aspect ratio

☐ Open exported diagram in associated program

Click "Ready" to export the diagram.

8.6 Data Analysis

Data Analysis is a tool to define a multidimensional model with analytic calculations to analyze information also called OLAP cube. Such cubes could effectively be re-oriented. So the tool allows you to view data in various ways, such as displaying all the cities down the page and all the products across a page and then immediately view it in another way. Because this re-orientation involves re-summarizing very large amounts of data, this new view of the data has to be generated efficiently to avoid wasting the analyst's time, i.e. within seconds, rather than the hours a relational database and conventional report-writer might have taken. It allows you to focus on business rules rather than creating dozens and dozens of reports. To run Data Analysis, choose [Tools | Data Analysis](#) main menu item.

To get an OLAP cube:


- [Input SELECT query](#)¹⁴⁸ in the [Query](#) window or load it from the .cub file.
- [Manage report data](#)¹⁴⁹ in the [Data](#) window.

The Data Analysis tool allows you to save the created OLAP cube to .cub file, print it, or export it to Excel, HTML, XML, and text file.

| Data | | Query | | | |
|--|---|-----------|--------|--------|-------------|
| au ord | | vtd sales | | | |
| price | | pub id | | | |
| au lname | title | 0736 | 0877 | 1389 | Grand Total |
| <input type="checkbox"/> Bennet | The Busv Executive's Database Guide | | | 19,99 | 19,99 |
| <input type="checkbox"/> Blotchett-Halls | Fiftv Years in Buckingham Palace Kitchens | | 11,95 | | 11,95 |
| <input type="checkbox"/> Carson | But Is It User Friendly? | | | 22,95 | 22,95 |
| <input type="checkbox"/> DeFrance | The Gourmet Microwave | | 2,99 | | 2,99 |
| <input type="checkbox"/> Dull | Secrets of Silicon Vallev | | | 20,00 | 20,00 |
| <input type="checkbox"/> Green | The Busv Executive's Database Guide | | | 19,99 | 19,99 |
| | You Can Combat Computer Stress! | 2,99 | | | 2,99 |
| Green Total | | 2,99 | | 19,99 | 22,98 |
| <input type="checkbox"/> Grindlesbv | Sushi. Anyvone? | | 14,99 | | 14,99 |
| <input type="checkbox"/> Hunter | Secrets of Silicon Vallev | | | 20,00 | 20,00 |
| <input type="checkbox"/> Karsen | Computer Phobic AND Non-Phobic Individuals: Beh | | 21,59 | | 21,59 |
| <input type="checkbox"/> Lockslev | Emotional Security: A New Algorithn | 7,99 | | | 7,99 |
| | Net Etiquette | | | | |
| Lockslev Total | | 7,99 | | | 7,99 |
| <input type="checkbox"/> MacFeather | Computer Phobic AND Non-Phobic Individuals: Beh | | 21,59 | | 21,59 |
| | Cooking with Computers: Surreptitious Balance Sh | | | 11,95 | 11,95 |
| MacFeather Total | | | 21,59 | 11,95 | 33,54 |
| <input type="checkbox"/> O'Leary | Cooking with Computers: Surreptitious Balance Sh | | | 11,95 | 11,95 |
| | Sushi. Anyvone? | | 14,99 | | 14,99 |
| O'Leary Total | | | 14,99 | 11,95 | 26,94 |
| <input type="checkbox"/> Pantelev | Onions. Leeks. and Garlic: Cooking Secrets of the | | 20,95 | | 20,95 |
| <input type="checkbox"/> Ringer | Is Anger the Enemy? | 21,90 | | | 21,90 |
| | Life Without Fear | 7,00 | | | 7,00 |
| | The Gourmet Microwave | | 2,99 | | 2,99 |
| Ringer Total | | 28,90 | 2,99 | | 31,89 |
| <input type="checkbox"/> Straight | Straight Talk About Computers | | | 19,99 | 19,99 |
| <input type="checkbox"/> White | Prolonged Data Deprivation: Four Case Studies | 19,99 | | | 19,99 |
| <input type="checkbox"/> Yokomoto | Sushi. Anyvone? | | 14,99 | | 14,99 |
| <input type="checkbox"/> del Castillo | Silicon Vallev Gastronomic Treats | | 19,99 | | 19,99 |
| Grand Total | | 59,87 | 147,02 | 146,82 | 353,71 |

8.6.1 Input SELECT query

To get an [OLAP cube](#)¹⁴⁹, enter SELECT query as a snowflake schema, represented by centralized fact tables (with numeric data) which are connected to multiple dimensions (the numeric data to be categorized by). Input the query text in the SQL Editor area directly or use "drag-n-drop" operation [SQL Editor](#) or Visual Query Builder areas and the Query tab of Data Analysis.

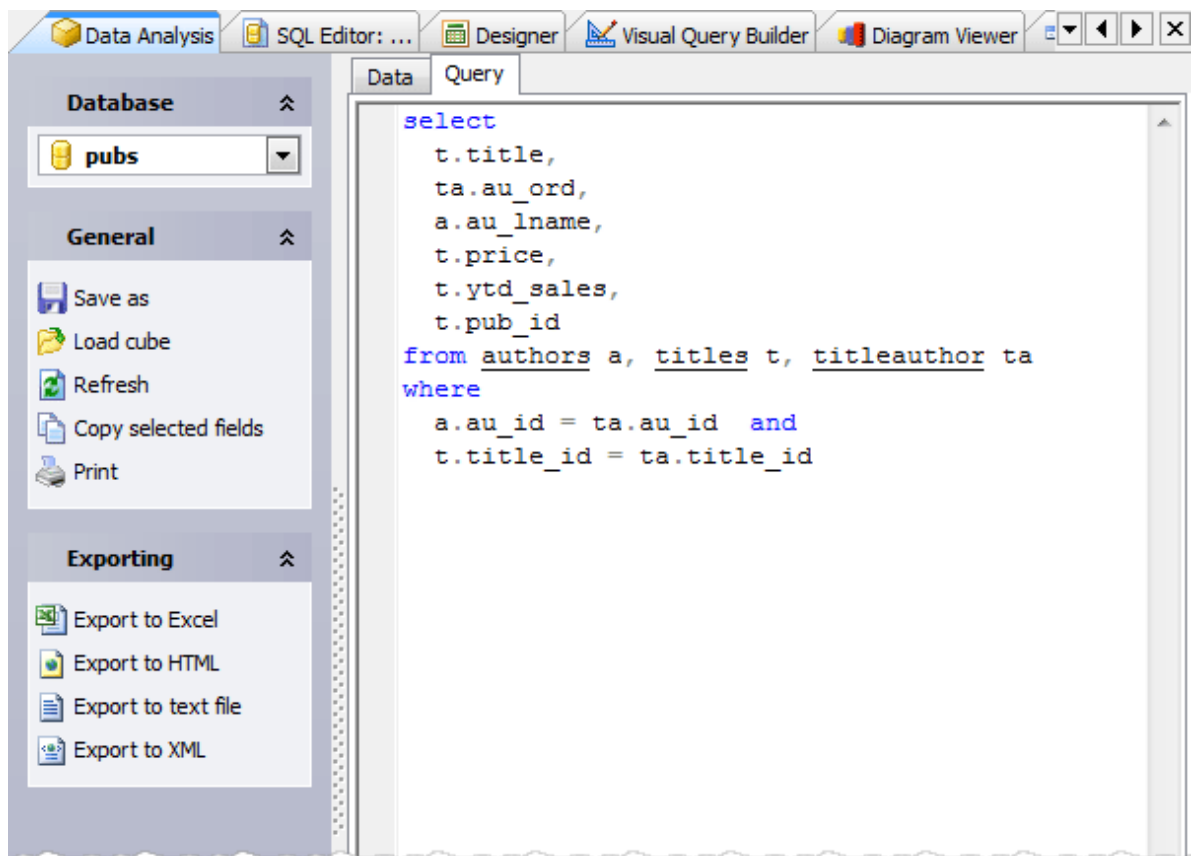


8.6.2 Managing report data

The [Data](#) tab allows you to manipulate the created OLAP cube appearance. At the beginning all the [query](#)¹⁴⁸ columns are arranged at the top of the tab. Put them according to your business rules: drag numeric columns to be filtered and summarized corresponding to the chosen columns and rows to the [Data Fields](#) area; place necessary columns to [Column Fields](#) / [Row Fields](#) areas respectively.

Note: Use for the Data Fields area only numerical columns.

| au_lname | Grand Total |
|----------------|-------------|
| Bennet | 19,99 |
| Blotchet-Halls | 11,95 |
| Carson | 22,95 |
| DeFrance | 2,99 |
| Dull | 20,00 |
| Green | 22,98 |
| Grindlesbv | 14,99 |
| Hunter | 20,00 |
| Karsen | 21,59 |
| Lockslev | 7,99 |
| MacFeather | 33,54 |
| O'Learv | 26,94 |
| Pantelev | 20,95 |
| Ringer | 31,89 |
| Straight | 19,99 |
| White | 19,99 |
| Yokomoto | 14,99 |
| del Castillo | 19,99 |
| Grand Total | 353,71 |

To set the aggregates calculated on the numeric columns, use the [Customize cub](#) window opened with the corresponding link at the Navigation bar. The window provides you also with an ability to specify columns the summary to be sorted by, the sort order and the max number of records represented in grid.

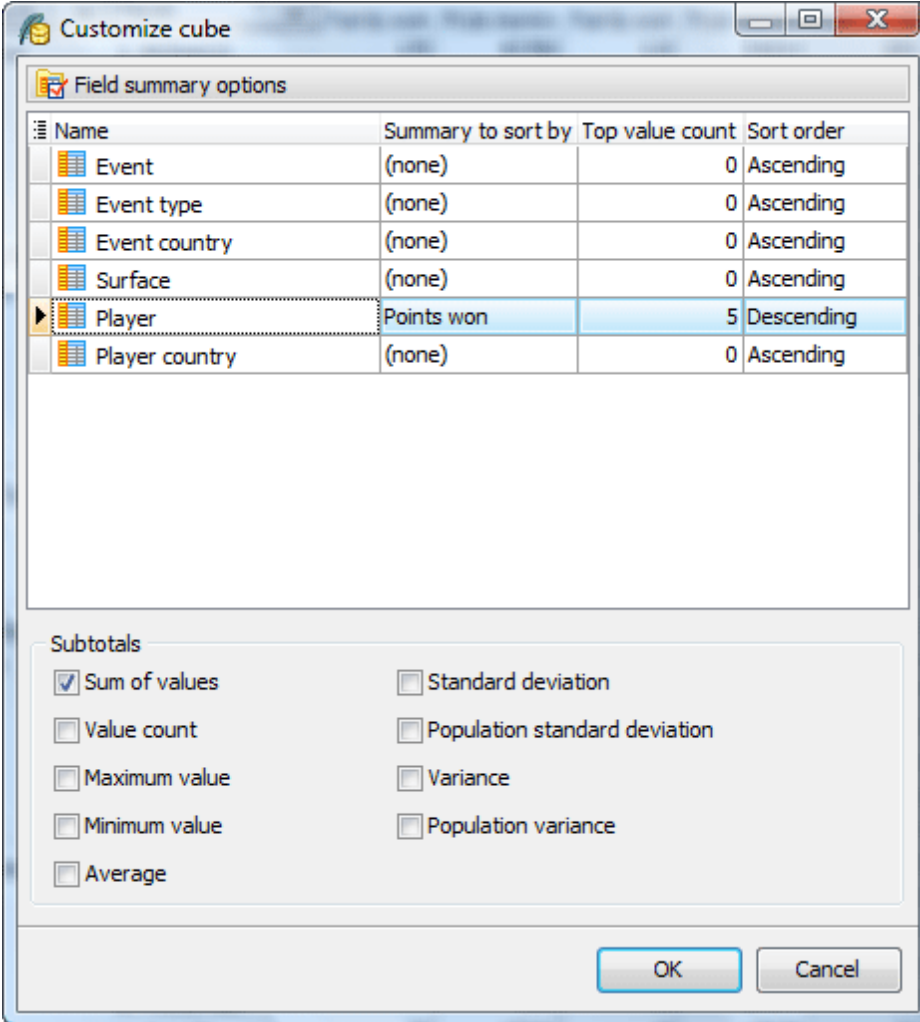

The "Customize cube" dialog box is shown. It features a "Field summary options" section with a table of fields and their summary settings. The "Player" field is selected, and its summary is set to "Points won" with a top value count of 5 and a descending sort order. Below the table is a "Subtotals" section with various summary options, including "Sum of values" (checked), "Standard deviation", "Value count", "Population standard deviation", "Maximum value", "Variance", "Minimum value", "Population variance", and "Average".

| Name | Summary to sort by | Top value count | Sort order |
|----------------|--------------------|-----------------|------------|
| Event | (none) | 0 | Ascending |
| Event type | (none) | 0 | Ascending |
| Event country | (none) | 0 | Ascending |
| Surface | (none) | 0 | Ascending |
| Player | Points won | 5 | Descending |
| Player country | (none) | 0 | Ascending |

Subtotals

- ☒ Sum of values
- ☐ Standard deviation
- ☐ Value count
- ☐ Population standard deviation
- ☐ Maximum value
- ☐ Variance
- ☐ Minimum value
- ☐ Population variance
- ☐ Average

OK Cancel

8.7 Report Designer


Report Designer allows you to create database reports, define reports appearance in your own style, equip it with master-detail data views, aggregate functions, and images and control the result with the ability of simultaneous previewing. To run Report Designer, choose [Tools | Report Designer](#) main menu item.

To create a report, you need to:


- [specify data sources](#)^[154] for the data to be used in the report;
- [add all necessary objects](#)^[154] to the report template;
- set the objects' format within the [Inspector window](#)^[156].

The prepared report pages are available immediately at the [Preview](#) window where you can browse it, save to it an .smr file, or print.

Report Designer in Action

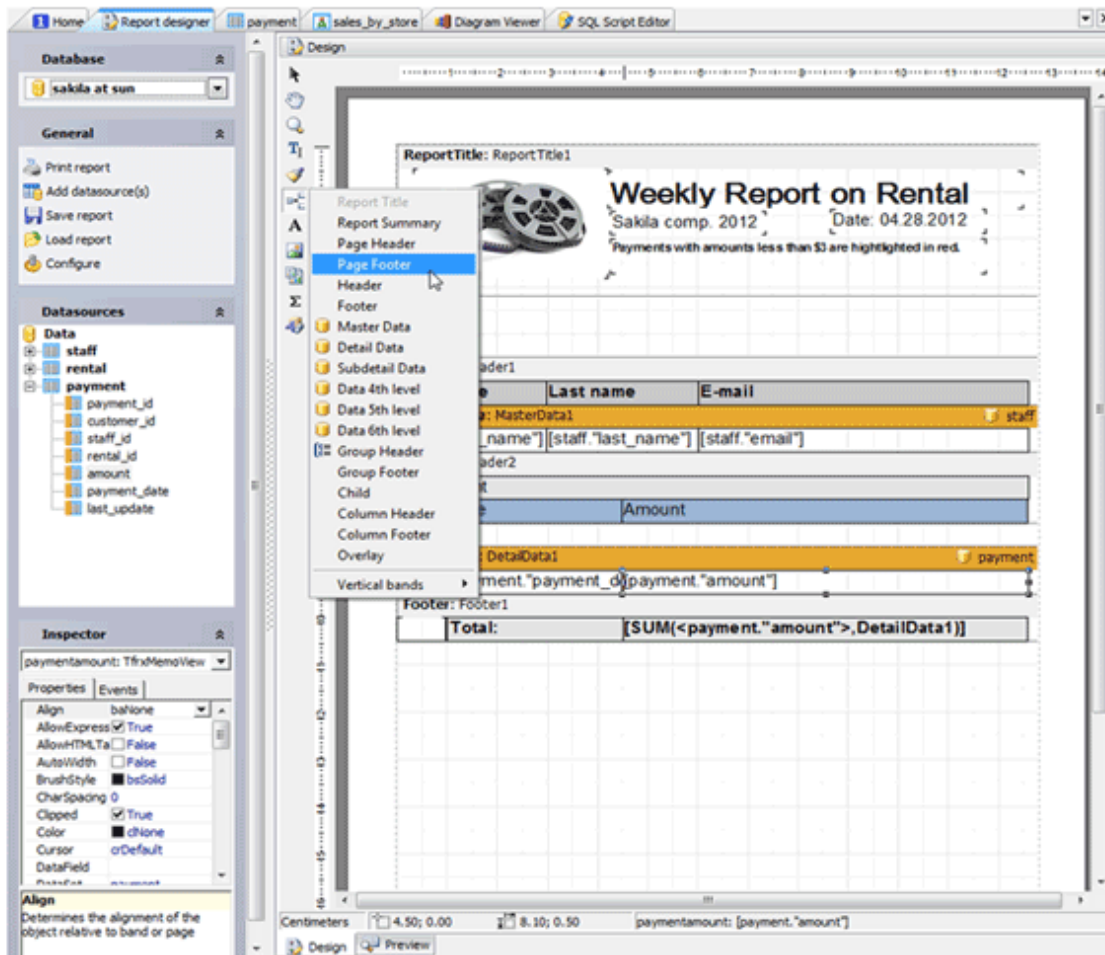

Report Preview

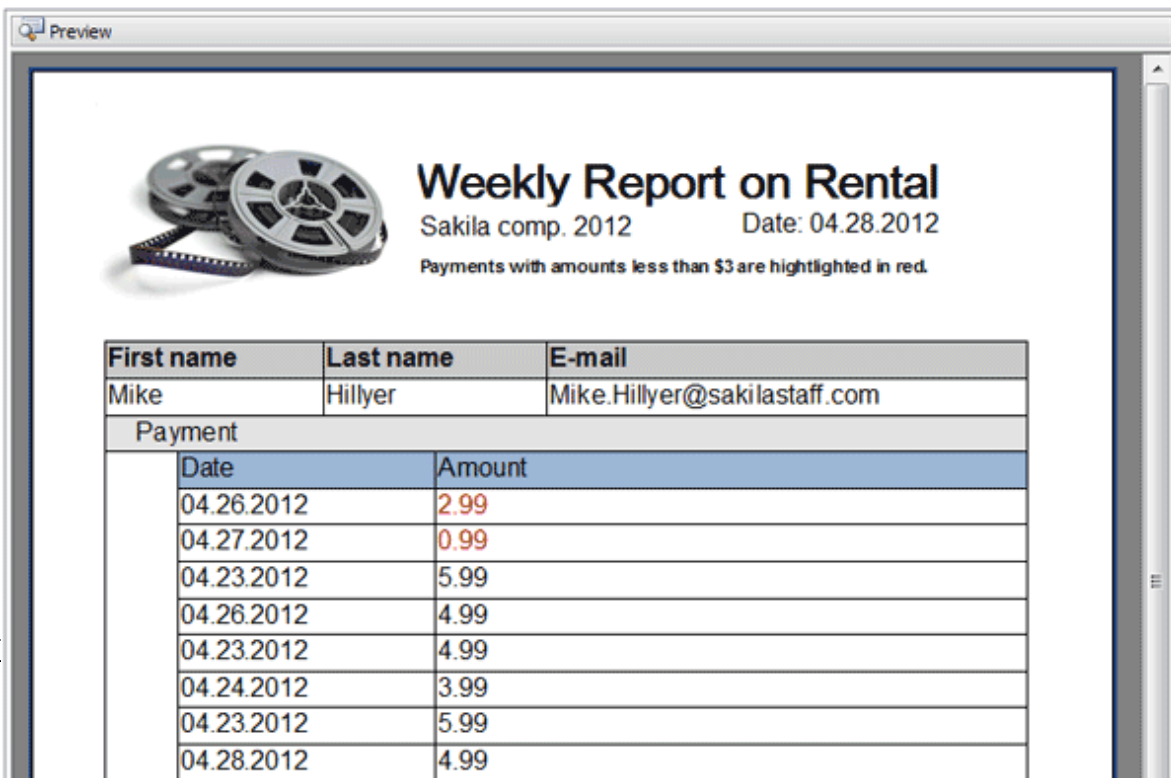

8.7.1 Designer Tools and Objects

A blank report is presented as a paper page. At any place on the page, a user is able to add objects, which can display different information (such as text and/or graphics), as well as to define report's appearance. There is a possibility to use rulers and a grid with a specified size in the Design tab. To enable/disable these options, follow the [Configure](#) link at the [Navigation Bar](#) and check the corresponding boxes.

Datasources

To use content of a table (view) column data in a report,

- check the necessary database is selected as Database at the Navigation Bar;
- drag the table which data to be used in the report to the Datasources pane at the Navigation Bar;
- drag the necessary column from this pane and drop it to the necessary location on a report page.

Designer tools:

Select tool

The standard tool to select objects, modify their sizes, etc.

Hand tool

The tool allows dragging a report page.

Zoom tool

When the button is pressed, clicking on the left button doubles the zoom (adds 100%), while clicking the right one zooms out by 100%. When holding the left mouse button while dragging, the selected area would be zoomed.

Edit text tool

Clicking on the text object allows editing its contents right on the report page. If you hold the left mouse button when moving the cursor, the text object appears in the selected place, and then its editor launches.

Copy format tool

The button becomes enabled when the text object is selected. When clicking on the text object with the left button, it copies formatting, which has the previously selected text object, into the object.

Available objects:

[Band objects](#) allow to specify where, when, and how to display data and information in reports. Bands are used for logically placing the objects it contains at a location on the output page. Insert Band adds an area with definite behaviour according to its type such basic bands as Header, Footer, Title, and Summary, and databands whose allow to print data from database tables such as Master Data, Detail Data, etc.

[Text object](#) displays one or several text lines within the rectangular area.

[Picture object](#) displays a graphic file in BMP, JPEG, ICO, WMF, or EMF format.


[Subreport object](#) allows inserting an additional report design page inside the basic one.

[System text](#) displays service information (date, time, page number, etc), as well as aggregate values.


[Draw object](#) represents different geometrical figures (diagonal line, rectangle, rounded rectangle, ellipse, triangle, and diamond).

Page options

This dialogue allows you to set the page settings of the prepared. To invoke the window, use the [Edit...](#) link of the page blank space popup menu. The dialogue has two pages: [Paper](#) and [Other options](#). On the [Paper](#) page, you can select size and alignment of paper, as well as set margins. In [Paper source](#) drop-down lists you can select a printer tray for the first page and the rest of the report pages.

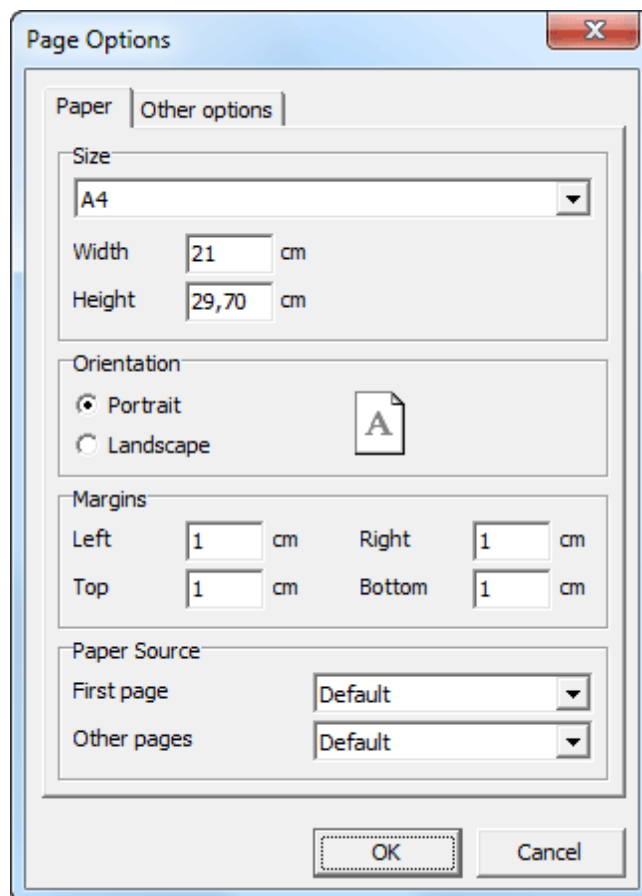

On [Other Options](#) you can set the number of columns for multi-column reports' printing. The current settings are displayed in the designer.

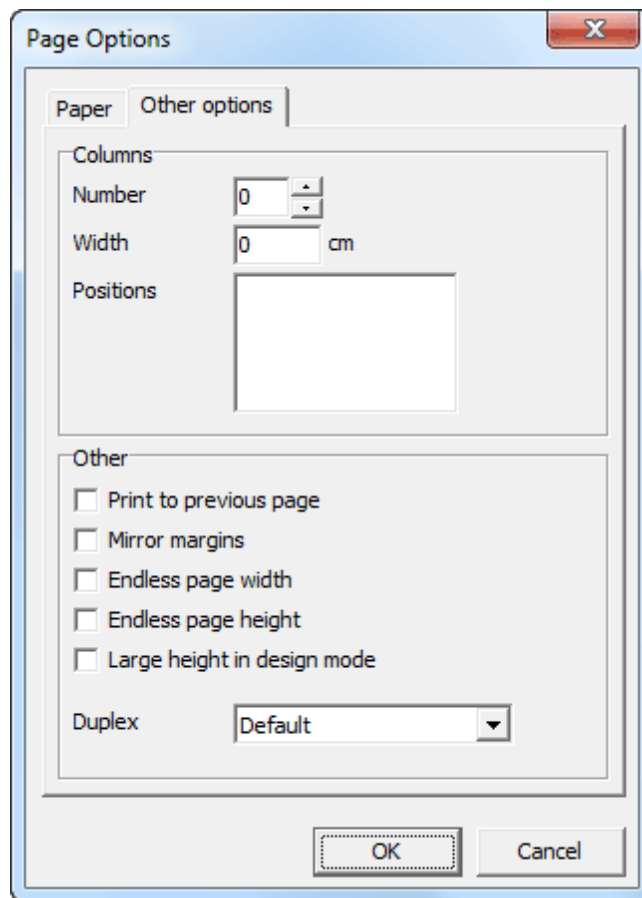

The [Print to previous page](#) flag allows you to print pages, beginning from blank space of the previous page. This option can be used in case when a report template consists of several pages or when printing batch (composite) reports.


The [Mirror margins](#) option switches right and left margins of page for even pages during previewing or printing a report.

The [Endless page width & height](#) option increases page's sizes depending on number of data records on the page (when running a report). In this case you will see one big page in the preview window instead of several standard size pages.

The [Large height in design mode](#) option increases page's height several times more. This feature can be useful if many bands are located in the page, and must be used when working with the overlay band. This only effects the page height in design mode.

8.7.2 Object Inspector

[Object Inspector](#) pane allows you to specify the appearance of each report object in detail. To setup object properties, select it at the Design area or select it from the popup menu at the top of the pane. Now all the properties of the object are available for editing. The most of properties are provided by a set of available values. The description of the selected option is displayed at the bottom of the pane.

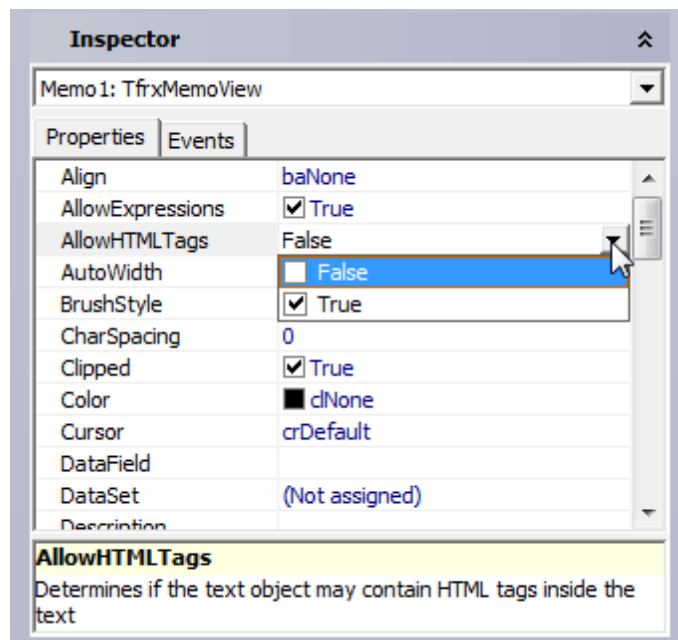

Below you can find a brief description of several options.

Align - set here the align option of the object according to the list.

AllowExpressions - enables the ability to display not only a static text, but expressions as well.

AllowHTMLTags - Enables using some simple HTML tags inside the text of an object. This option is disabled by default. Here is the list of supported tags:

 - bold text;

<i> - text in italic;

<u> - underlined text;

<sub> - subscript;

<sup> - superscript;

 - font color;

<nowrap> - text which does not get broken up when using **WordWrap**, but gets transported wholly.

Font: there are abilities to specify the charset, font color, font name, and font size, and also set the bold, italic, underline, strike out attributes.

Frame: You can set as the color, the style and the shadow for all the frame, as well as for each frame line.

BrushStyle - type of object filling.

CharSpacing - space between symbols in pixels.

GapX, GapY - text indents from object's left and top boundaries (in pixels).

LineSpacing - space between lines (in pixels).

ParagraphGap – the first paragraph line indent (in pixels).


Rotation - specify the angle of the text rotation in the field.

WordWrap - if it is disabled, the long lines will be simply cut off.

8.8 Schema Designer

Schema Designer allows you to create physical Entity Relationship Diagram that will represent objects in your database. A diagram represents the tables of your database and the relationships between them. The tool is intended for reverse engineering and database modification in an easy and powerful way. It helps you to simplify database maintenance.

A diagram of your database can help you define operational aspects of your application logic that you might otherwise overlook. Also, a well-defined data diagram that accurately represents your tasks can be helpful in orienting employees to goals and operations. The data diagram can also serve as an invaluable communications tool for both internal and external constituents.

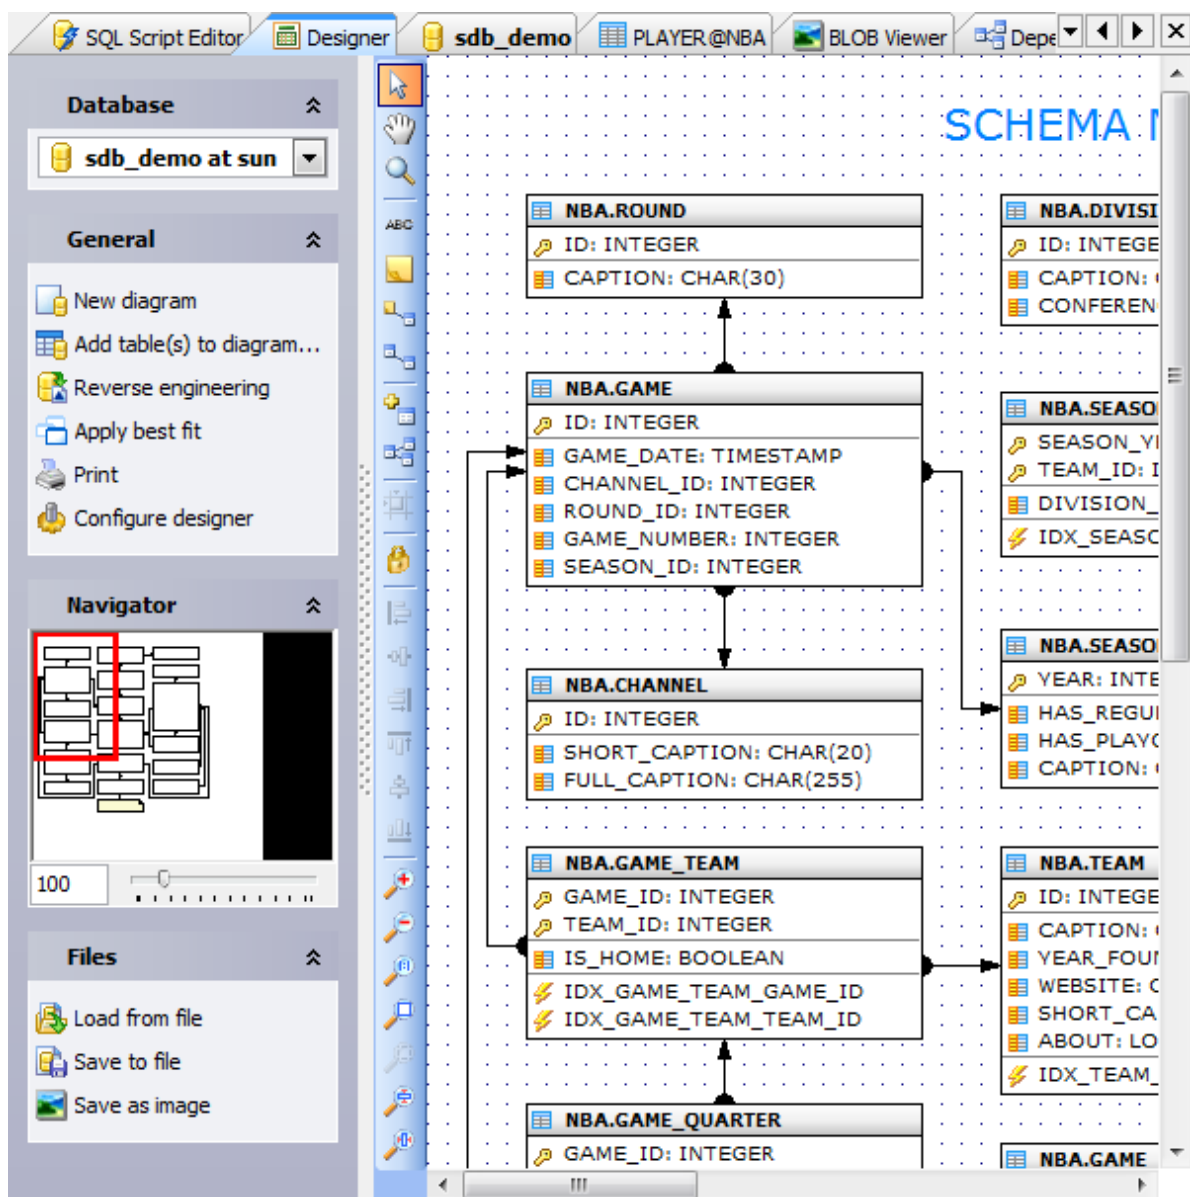

Below you can find answers for the following questions:

- [How can I add a table to a diagram?](#)
- [How can I add a relationship between tables?](#)
- [How can I delete a diagram object?](#)
- [How can I work with diagram objects?](#)

See also: [Designer Navigation bar](#), [Schema Designer Toolbox](#).

Adding a table

You can add an existing database table to the diagram using popup menu in the working area, or with the corresponding link on the [Navigation bar](#).

To create a new table, use the appropriate item of the popup menu in the working area. The table will be created in the current database.

Tables also may be dragged on the diagram from [Explorer](#) and the similar to [Explorer](#) tools like [Object Manager](#) and [Object Browser](#).

Moreover, [Designer](#) provides you with a possibility to represent all the tables and relationships existing in the database automatically (the [Reverse engineering](#) link of the [Navigation bar](#)). At that the database contents will be represented on a diagram in the most compact and vivid manner.

All the diagram objects are available for editing. Just double click the object (table or relationship) to view/edit its properties within the corresponding editor.

Adding a relationship between tables

At adding to a diagram tables that reference on each other, the relationships between tables are represented automatically. The [Schema Designer](#) tool also allows you to add new foreign keys to the diagram tables. Thereto you can do the following.

Select a table (child table)

- Use the [Create new...](#) item of the popup menu to launch [Foreign Key Properties](#) window.
- Specify there properties of the relationship been created.

Moreover you can add a reference graphically:

- Choose the [Create relation](#) tool on the [Toolbox](#). Your mouse cursor will change its appearance.
- Then click on the table (child table) that will have foreign key and then click on the second table (parent table) whose primary key will be referred by the new foreign key.
- Specify properties of the relationship been created in the [Foreign Key Properties](#) window.

With the [Create new...](#) item of the popup menu you can also add a new field, an index etc. to the selected table. For more information about object properties see: [Field Editor](#), [Index Editor](#).

Deleting of the diagram objects

To hide a table (several tables) or a relationship between tables, select the objects and click [Remove selection](#) link of the popup menu or [Navigation bar](#). You can also use the **Del**

key for this purpose.

It's also possible to physically delete a table/foreign key from the database: just select the object to delete and use the appropriate item of the popup menu.

Editing of a diagram appearance

Movement of a table/several tables along the diagram is realized with dragging or pressing **Ctrl**+arrows. You can use **Shift**+arrows to change width/height of table/several tables representation.

[Designer](#) also allows you to edit shape of the line representing foreign key relations/ logical relations. In order to break the line you should

- Select the relationship.
- Press **Ctrl** and click on the necessary line section to create a new node.
- Position the node by dragging.

You can also delete a node on the line. Thereto

- Select the relationship.
- Press **Alt** and click the node to delete. In that case the near nodes will be united by a straight line.

8.8.1 Designer Navigation Bar

The [Navigation Bar](#) of [Schema Designer](#) provides you the following opportunities:

Use the [Database](#) drop-down list to move around your database databases.

There are also links for adding a [New diagram](#) or an existing [table to diagram](#) quickly.

[Reverse engineering](#)

The link provides you to create a new diagram with all the database tables and

[Apply best fit](#)

Use the link to dispose tables on the diagram in the most clear manner.

[Remove selection](#)

The link cancels current object selection.

Use [Print](#) to see the print preview of the diagram.

Certainly, it's possible to customize [Schema Designer](#) with [Configure designer](#). For more information see [Schema Designer Customization](#)^[187].

The [Navigator](#) part allows you to adjust the scale of the diagram and the position of the visible part.

Besides the [Navigation bar](#) allows you to [Load](#) a diagram from file, [Save to file](#), and [Save as image](#) (Bitmap, GIF and JPEG formats are supported).

8.8.2 Schema Designer Toolbox

The toolbox is located on the left side of the [Schema Designer's](#) working area.



Move


The tool is intended for selection of diagram objects. Use the tool then click anywhere inside of the object. Double click opens the corresponding [Object Editor](#).

To select multiple objects, use the tool then click and drag a selection rubber-band so that the rubber-band box encompasses the objects you want to select, and then release the mouse button.

To add objects to the list of already selected objects again, use the Move tool then click anywhere inside of the object holding the **Shift** button. To quick launch of the tool, use **M** shortcut.



Use [Create text box](#) to add [title and comments](#) on your diagram. Click on the necessary place and double-click on the appeared box to enter a text. You can also tune up the text font, color and size with [Text options](#) of the box popup menu. To quick launch of the tool, use **XX** shortcut.

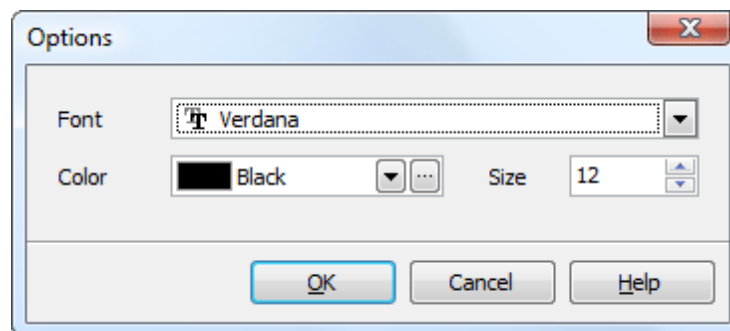

Moreover you can add notes and also links between them and diagram elements using



[Create note](#) and [Create link to note](#) links. To quick launch of the tools, use **N** and **L** shortcuts accordingly.



Lock



The tool to locking/unlocking diagram objects. This feature prevents your diagram from unforeseen changes: when the diagram is locked, you can neither move/resize/delete existing objects nor add new ones.



[Hand](#) tool moves a diagram within its window. To quick launch of the tool, use **H** shortcut.



[Zoom](#) magnifies and reduces the view of a diagram. To zoom out, hold the Alt key. To quick launch of the tool, use **Z** shortcut.

There are also tools allowing to  [Create table](#) and  [Create relation](#) directly from the [Designer](#). To quick launch of the tool, use **T** and **R** shortcut.

Below you can find toolset for aligning the selected objects by left and right edges, by horizontal and vertical centers, tops and bottoms.

Click the [Zoom in](#) button in the options bar to magnify to the next preset percentage.

When the image has reached its maximum magnification level, the command is dimmed.

Click the [Zoom out](#) button in the options bar to reduce to the previous preset percentage. When the image has reached its maximum reduction level, the command is dimmed.


Click the [Zoom 1:1](#) button to display a diagram at 100%.

Pay attention to the [Fit diagram](#) function, that pick-up properly scaling factor to display your diagram fully. For your convenience the [Fit selected](#), [Fit height](#), and [Fit width](#) were added.

8.9 SQL Generator

Among other features AnySQL Maestro provides you with SQL Generator, a tool to create simple SQL statements. Just choose a database object, select statement type (Definition, Select, Insert, Update, or Delete) and the destination device (Clipboard, File, SQL Editor, SQL Script Editor).

The [SQL Generator](#) window can be invoked from the Explorer tree.

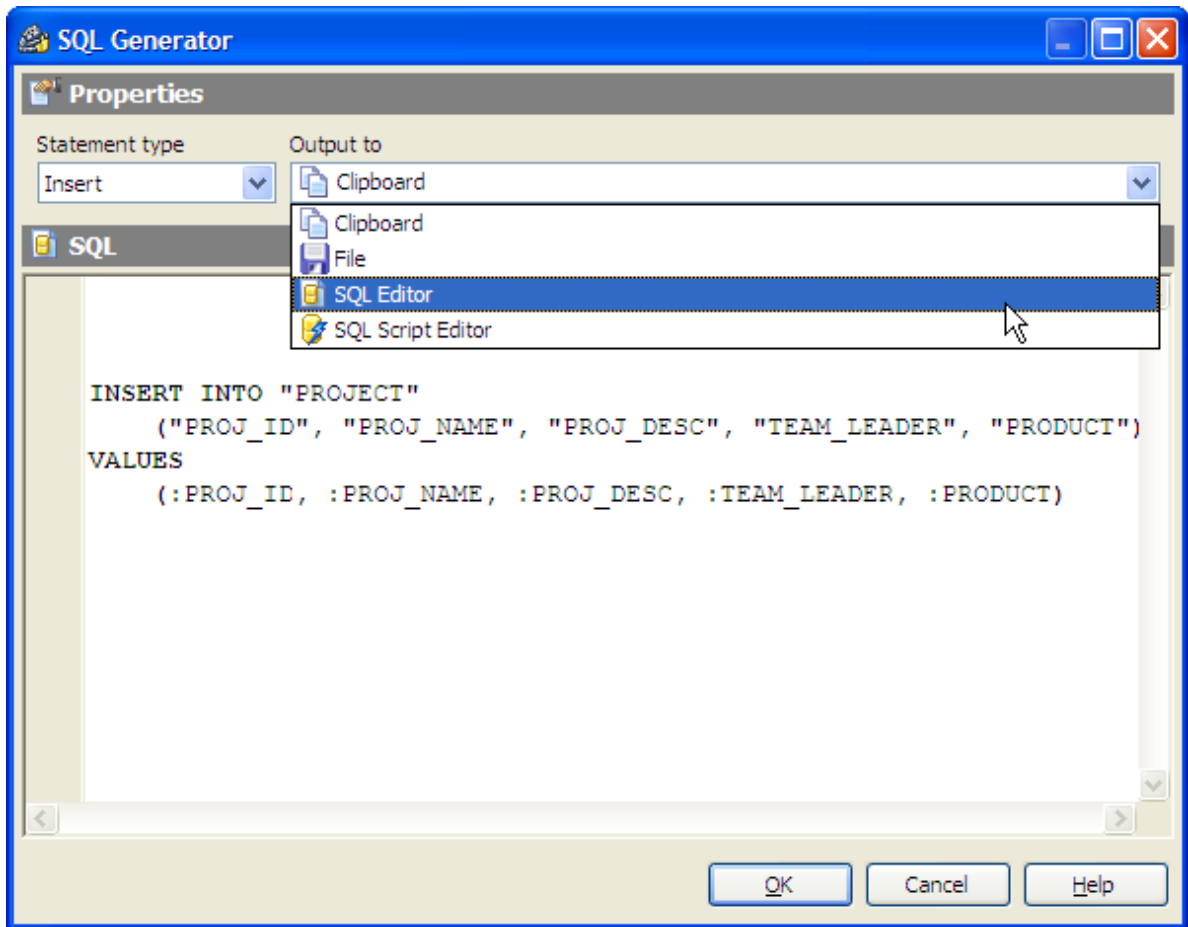

8.10 Generation of updatable views

To generate updatable view,

- select the **Object | Generate updatable views...** main menu item (to create views for several tables) or use the corresponding popup menu item of the table's node at the Explorer tree (to create a view for one table).
- Specify tables the views will be created for (in case of several tables).
- Specify the abilities to be available on working with the view data. By default the views are generated for inserting, updating, and deleting of table data.
- Adjust the name templates of views and corresponding triggers.
- Select the action to perform after the generation. The created definitions can be copied to Clipboard, saved to a file, sent to SQL Script Editor or executed immediately.

Options

| Abilities | |
|-----------|-------------------------------------|
| Insert | <input checked="" type="checkbox"/> |
| Update | <input checked="" type="checkbox"/> |
| Delete | <input checked="" type="checkbox"/> |


| Naming | |
|---------------------|-------------------|
| View name | V_%TableName% |
| Insert trigger name | TR_BI_%TableName% |
| Update trigger name | TR_BU_%TableName% |
| Delete trigger name | TR_BD_%TableName% |

Action to perform after generation

Execute immediately

8.11 Split table

It's not an uncommon situation when new requirements arise, or when you need to enforce referential integrity on a set of columns, and the best decision is to split a table into two separate tables. AnySQL Maestro provides you with [Split Table Wizard](#), a simple tool to generate a bunch of SQL scripts to modify the primary table, to create a secondary table with a primary key, and to transfer data from the primary table to the secondary one without duplicating of data. To invoke the wizard, follow the corresponding link of the [Generate SQL](#) section of popup menu of the selected table at the Explorer tree.

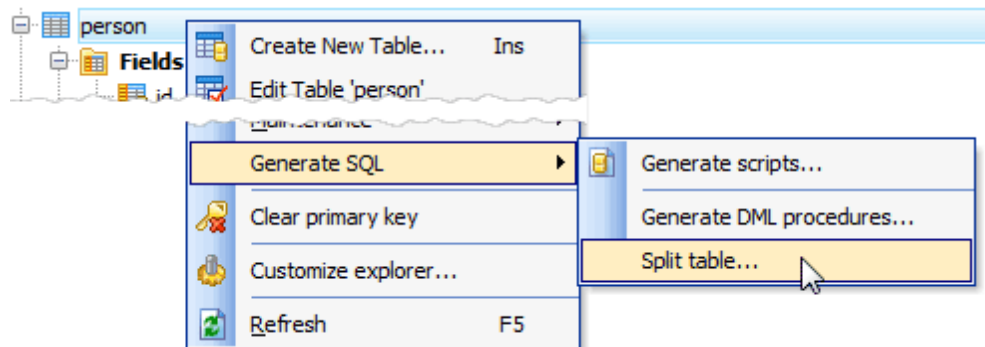

Let's see the wizard in action on the example of a table with the following SQL definition:

```
CREATE TABLE person (
  id          integer NOT NULL,
  city        varchar(30) NOT NULL,
  full_name   varchar(30) NOT NULL,
  /* Keys */
  CONSTRAINT person_pkey
    PRIMARY KEY (id)
);
```

The table stores sample data:

| | id | city | full_name |
|---|----|----------|----------------|
| 1 | 1 | New York | John Smith |
| 2 | 2 | Boston | Mary Doe |
| 3 | 3 | Boston | Jason Lee |
| 4 | 4 | New York | Deisy O'Connor |

To enforce the referential integrity, we specify 'city' as secondary table:

Primary table

public

person

Secondary table

public

city

The primary table must contain now only 'id' and 'full_name' columns. The field 'city_id' will be added to the table automatically.

Primary table fields

| Name | |
|------|-----------|
| 1 | id |
| 2 | full_name |

Secondary table fields

| Name | |
|------|------|
| 1 | city |

>

Now we have to specify what kind of primary key to be created for the secondary table: surrogate or natural. We create the 'city' table with a surrogate primary key.

☒ Use surrogate primary key

Surrogate key field name

id

☐ Use natural primary key

Secondary table key fields

| Primary | | Name |
|---------|--------------------------|------|
| 1 | <input type="checkbox"/> | city |


Then click Ready and get the following tables:

| | id | full_name | city_id |
|---|----|----------------|---------|
| 1 | 1 | John Smith | 2 |
| 2 | 2 | Mary Doe | 1 |
| 3 | 3 | Jason Lee | 1 |
| 4 | 4 | Deisy O'Connor | 2 |

| | id | city |
|---|----|----------|
| 1 | 1 | Boston |
| 2 | 2 | New York |

8.12 Nullable Column Checker

Nullable Column Checker allows you to refactor your database schema by enforcing NOT NULL constraints to all necessary table columns. It suggests candidates for NOT NULL columns among columns of the selected table and generates SQL script to replace all NULL values of selected columns with specified default values and to add the NOT NULL constraint to these columns. To invoke the wizard, follow the corresponding link of the **Generate SQL** section of popup menu of the selected table at the Explorer tree.

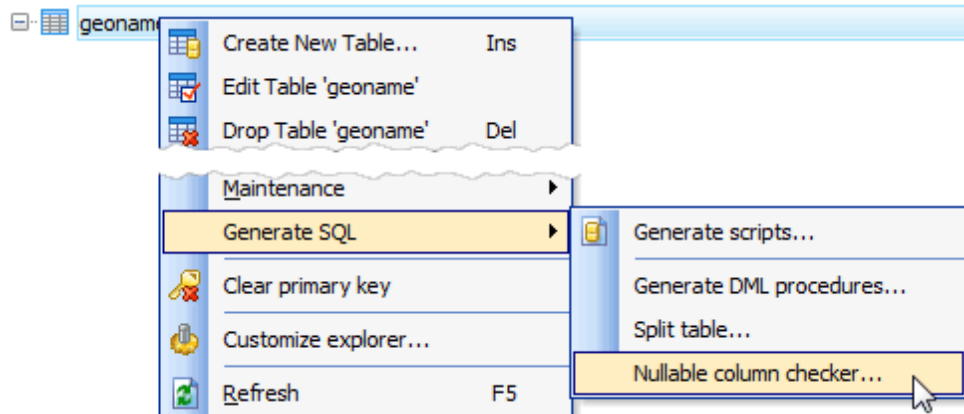


To get SQL scripts enforcing NOT NULL constraints to columns of an existing table, select the necessary columns, specify the default values to be used instead of existing columns NULLs and select the action to perform after the generation. The created scripts can be copied to Clipboard, saved to a file, sent to [SQL Script Editor](#)^[133] or executed immediately.

Nullable column checker

Select columns you want to add a NOT NULL constraint for and specify a default value if necessary

Fields

| | Name | Nulls | Default value | Selected |
|---|----------------|--------|---------------|-------------------------------------|
| 1 | name | 0 | | <input checked="" type="checkbox"/> |
| 2 | asciname | 2 | 'Unknown' | <input type="checkbox"/> |
| 3 | alternatenames | 148557 | | <input type="checkbox"/> |
| 4 | latitude | 0 | | <input checked="" type="checkbox"/> |
| 5 | longitude | 0 | | <input checked="" type="checkbox"/> |
| 6 | fclass | 0 | | <input checked="" type="checkbox"/> |
| 7 | fcode | 0 | | <input checked="" type="checkbox"/> |
| 8 | country | 0 | | <input checked="" type="checkbox"/> |
| 9 | cc2 | 211781 | | <input type="checkbox"/> |


 Execute immediately

[Help](#) [< Back](#) [Next >](#) [Ready](#) [Cancel](#)

8.13 Dialogs


AnySQL Maestro provides two dialogs for searching and replacing text in the editor areas of the database tools. Both of them are available through the popup menu of the editor area.

- [Find Text dialog](#) ^[170]
- [Replace Text dialog](#) ^[171]

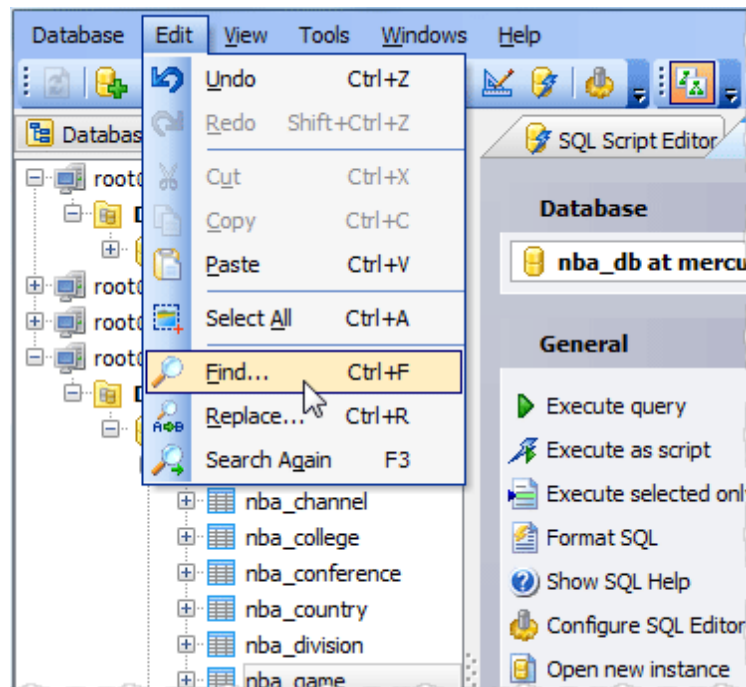

8.13.1 Find Text dialog

The [Find Text](#) dialog is provided for quick search for certain text.

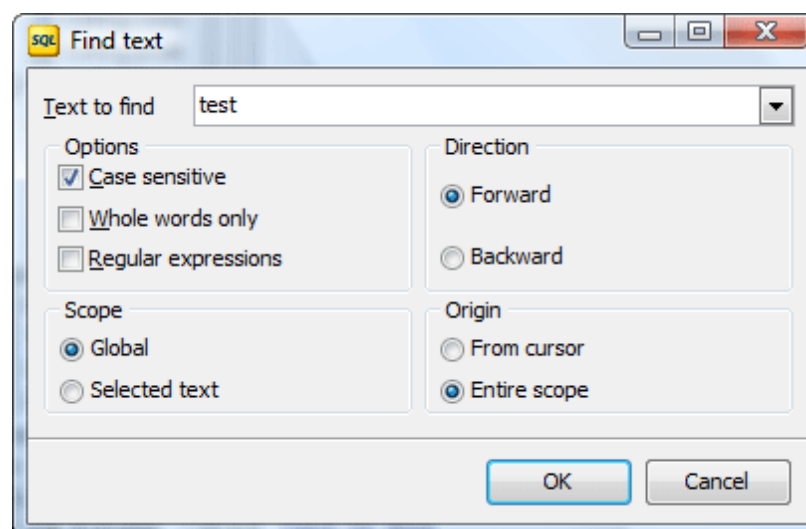

Text to find

Enter a search string or click the down arrow next to the input box to select from a list of previously entered search strings.

☒ Case sensitive

Differentiates uppercase from lowercase when performing a search.

☒ Whole words only

Searches for words only. (With this option off, the search string might be found within longer words.)

☒ Regular expressions

Recognizes regular expressions in the search string.

Forward

Searches from the current position to the end of the file. [Forward](#) is the default.

Backward

Searches from the current position to the beginning of the file.

Global

Searches the entire file, in the direction specified by the [Direction](#) setting. Global is the default scope.

Selected text

Searches within the selected text only, in the direction specified by the [Direction](#) setting. You can use the mouse or block commands to select a block of text.

From cursor


The search starts at the cursor's current position, and then proceeds either forward to the end of the scope, or backward to the beginning of the scope depending on the [Direction](#) setting. [From Cursor](#) is the default setting.

Entire scope

The search covers either the entire block of selected text or the entire file (no matter where the cursor is), depending upon the [Scope](#) options.

8.13.2 Replace Text dialog

The [Replace Text](#) dialog is provided for searching and replacing text in the editor window.

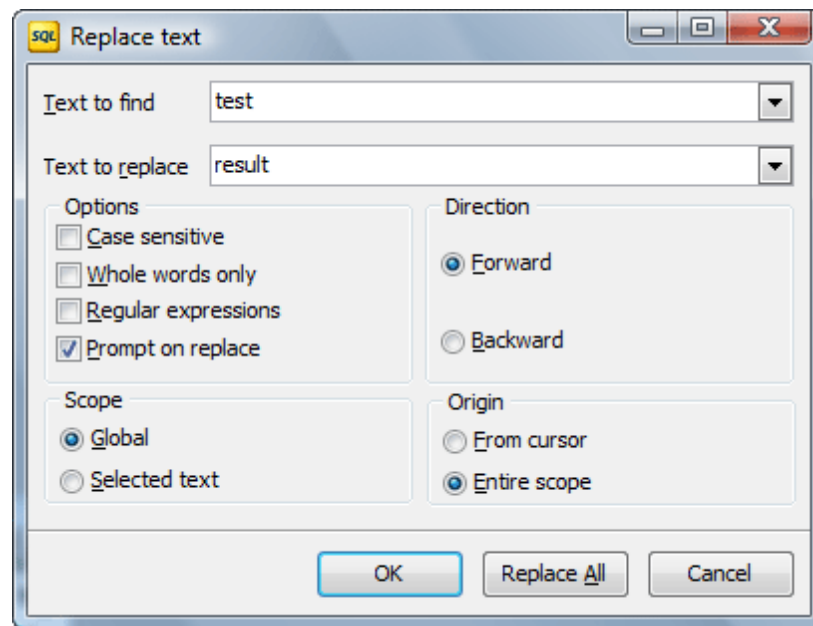

Text to find

Enter a search string. To select from a list of previously entered search strings, click the down arrow next to the input box.

Text to replace

Enter the replacement string. To select from a list of previously entered search strings, click the down arrow next to the input box. To replace the text with nothing, leave this input box blank.

☒ Case sensitive

Differentiates uppercase from lowercase when performing a search.

☒ Whole words only

Searches for words only. (With this option off, the search string might be found within longer words.)

☒ Regular expressions

Recognizes specific regular expressions in the search string.

☒ Prompt on replace

Prompts you before replacing each occurrence of the search string. When Prompt on replace is off, the editor automatically replaces the search string.

Forward

Searches from the current cursor position, to the end of the file. **Forward** is the default Direction setting.

Backward

Searches from the current cursor position, to the beginning of the file.

Global

Searches the entire file, in the direction specified by the Direction setting. **Global** is the

default scope.

From cursor

The search starts at the cursor's current position, and proceeds either forward to the end of the scope, or backward to the beginning of the scope depending on the Direction setting. [From cursor](#) is the default Origin setting.

Entire scope

The search covers either the entire block of selected text or the entire file (no matter where the cursor is in the file), depending upon the Scope options.

Replace All

Click Replace all to replace every occurrence of the search string. If you check [Prompt on replace](#), the [Confirm dialog](#) box appears on each occurrence of the search string.

9 Options

AnySQL Maestro allows you to customize the way it works within the [Options](#) dialog. To open the dialog, select the [Tools | Options](#) main menu item.

The window allows you to customize the options grouped by the following sections:

- [Application](#)^[175]
General AnySQL Maestro options: environment style, confirmations, window restrictions, explorer tree, [SQL Editor](#), [Visual Query Builder](#), etc.
- [Editors & Viewers](#)^[197]
Customizing of all the SQL editors - [SQL Editor](#), [SQL Script Editor](#), etc.
- [Appearance](#)^[205]
Customizing program interface - bars, trees, menus, etc.

Besides, the [Options](#) dialog allows you to export all program settings to a *.reg file for future use, e.g. on another PC (see [Export Settings](#)^[214] for details).

It is a good idea to check through these settings before you start working with AnySQL Maestro. You may be surprised at all the things you can adjust and configure!

9.1 Application

The [Application](#) section allows you to customize common rules of AnySQL Maestro behavior. The section consists of several tab; follow the links to find out more about each of them.

- [Preferences](#) ^[175]
- [Confirmations](#) ^[176]
- [Directories](#) ^[178]
- [Tools](#) ^[178]
 - [Explorer](#) ^[180]
 - [Object Manager](#) ^[181]
 - [SQL Editor](#) ^[181]
 - [SQL Script Editor](#) ^[182]
 - [Query Builder](#) ^[183]
 - [BLOB Viewer](#) ^[185]
 - [Export data](#) ^[186]
 - [Database Designer](#) ^[187]
- [Object Editors](#) ^[188]
 - [Table](#) ^[190]
- [Data Grid](#) ^[190]
 - [Colors](#) ^[193]
 - [Formats](#) ^[193]
 - [Filter](#) ^[195]

9.1.1 Preferences

User interface area allow you to select your favorite UI style according to your preferences.

☒ [Display splash screen at startup](#)

Displays the splash screen on AnySQL Maestro startup.

☒ [Save desktop on disconnect](#)

Saves all the database windows and their positions on disconnecting from the database.

☒ [Disable multiple instances](#)

Prohibits running multiple instances of AnySQL Maestro.


☒ [Open Object Manager after connect](#)

Opens the Object Manager window after connection is established.

☒ [Clear filter expression on filter panel close](#)


Clears the filter applied to the explorer tree and all the instances of Object Manager

after the filter panel is closed.

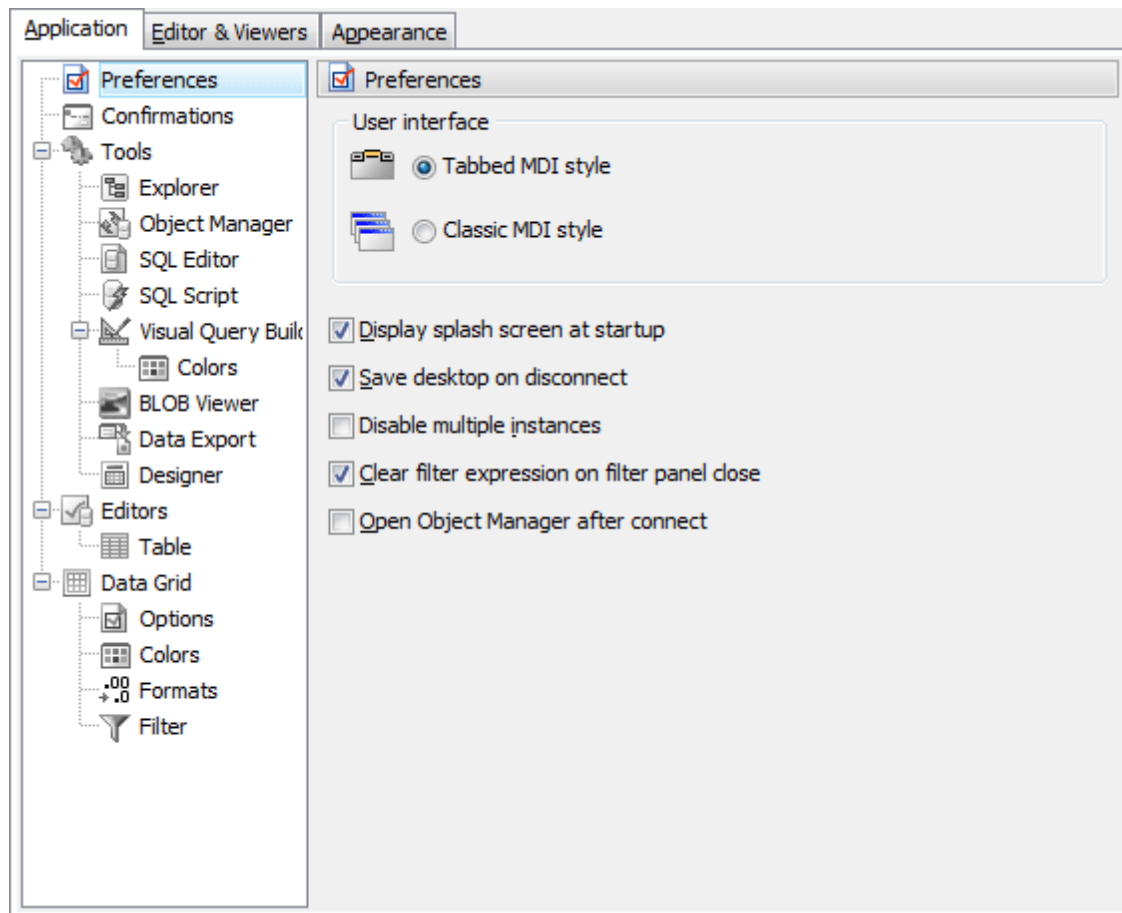

9.1.2 Confirmations

Use this tab to manage application confirmations.

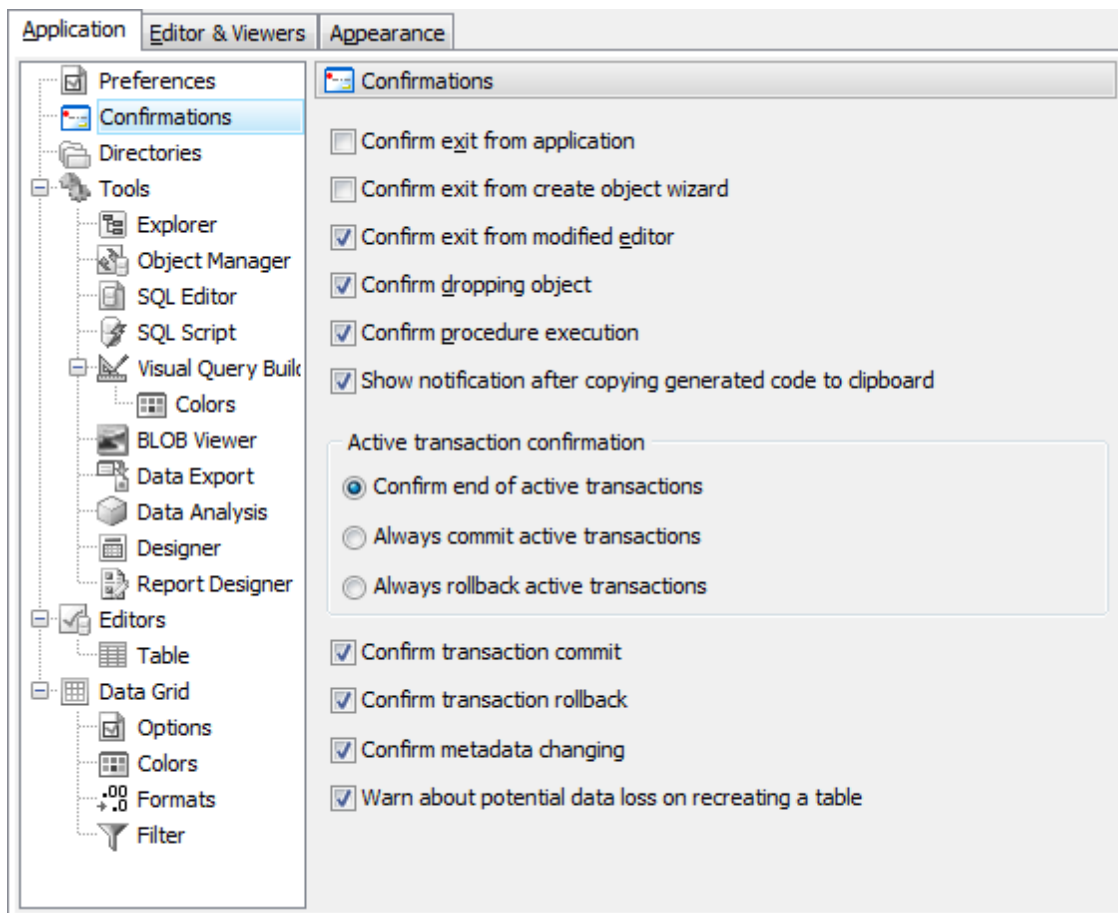

☒ **Confirm exit from Create Object Wizard**

If this option is checked, the program requires confirmation each time you want to exit the Create Object Wizard.

☒ **Confirm exit from modified editor**

If this option is checked, the program asks you to confirm exit from the editor, if you have made any changes.

☒ **Confirm dropping object**

If this option is checked, the program requires confirmation for dropping database object.

☒ **Confirm exit from application**

If this option is checked, the program requires confirmation when you want to exit <%PRODUCT_NAME%.

☒ **Transaction confirmation**

Select whether you will be prompted to commit or rollback active transaction or AnySQL Maestro will commit or rollback transactions without asking.

☒ **Confirm metadata changing**

If this option is checked, the program requires confirmation for changing metadata.


9.1.3 Directories

The tab allows you to specify default directories to be used on database profiles creating. You can use such variables as %database_name%, %database_alias%, and %user_name%.

Example:


To store all SQL scripts in folders sorted by databases in the "C:\SQL Scripts\" directory, specify the default directory for SQL scripts as follows:

C:\SQL Scripts\%database_name%

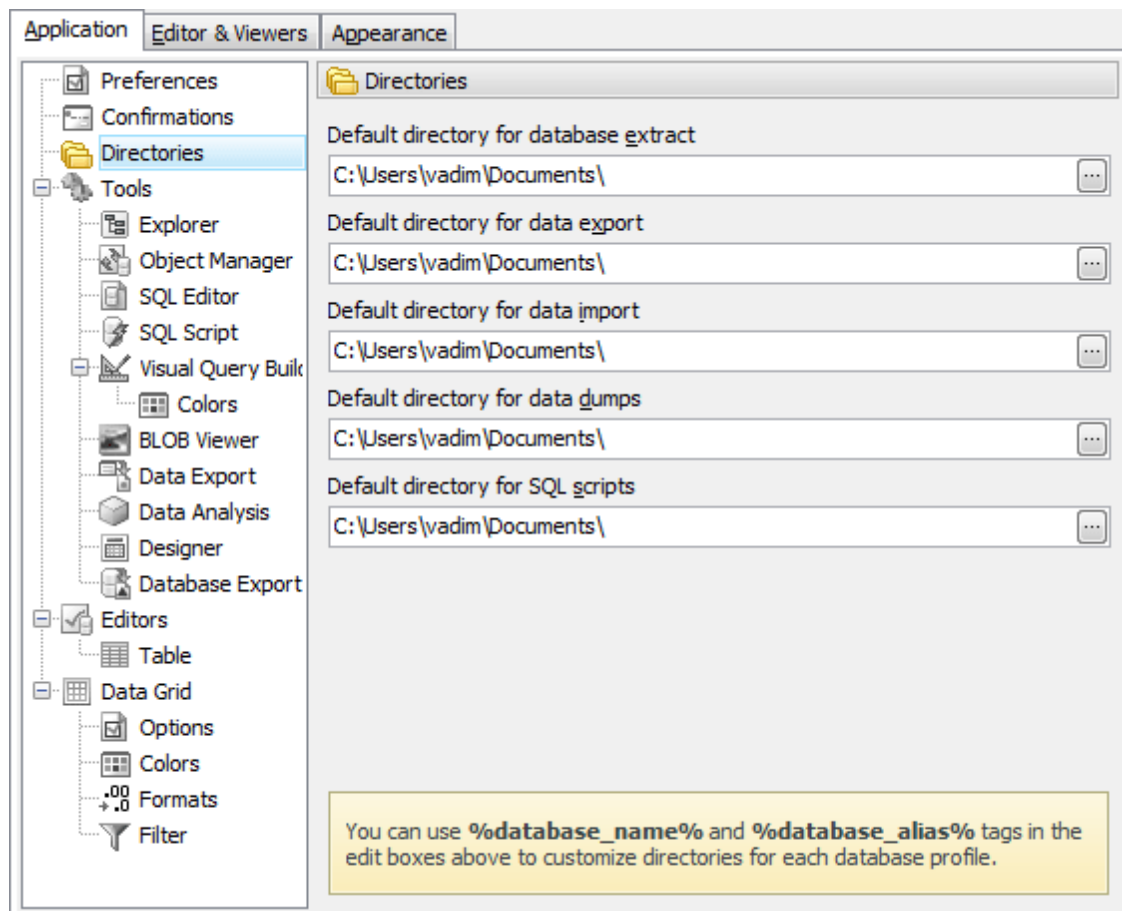

9.1.4 Tools

Below you will find a detailed decryption of the following tools options.

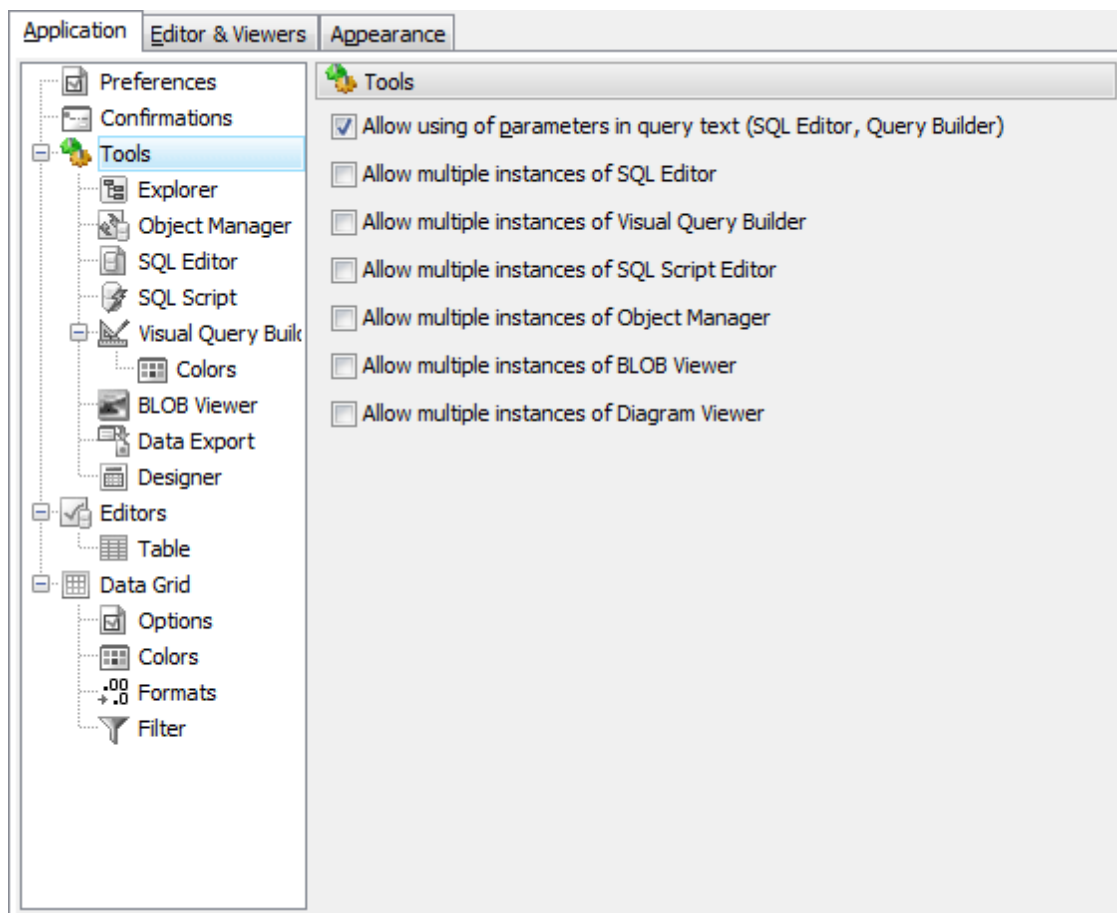

☒ **Allow using of parameters in query text**

Check this option to be able to use query parameters in [SQL Editor](#)^[88] and [Visual Query Builder](#)^[88].

☒ **Allow multiple instances of SQL Editor**

Check this option to be able to use multiple instances of [SQL Editor](#)^[88] simultaneously.

☒ **Allow multiple instances of Visual Query Builder**

Check this option to be able to use multiple instances of [Visual Query Builder](#)^[88] simultaneously.

☒ **Allow multiple instances of SQL Script Editor**

Check this option to be able to use multiple instances of [SQL Script Editor](#)^[133] simultaneously.

☒ **Allow multiple instances of Object Manager**

Check this option to be able to use multiple instances of Object Manager simultaneously.

☒ **Allow multiple instances of BLOB Viewer**

Check this option to be able to use multiple instances of [BLOB Viewer](#)^[137] simultaneously.


☒ **Allow multiple instances of Diagram Viewer**

Check this option to be able to use multiple instances of [Diagram Viewer](#)^[143]

simultaneously.

9.1.4.1 Explorer

Below you will find a detailed decryption of the following explorer options.

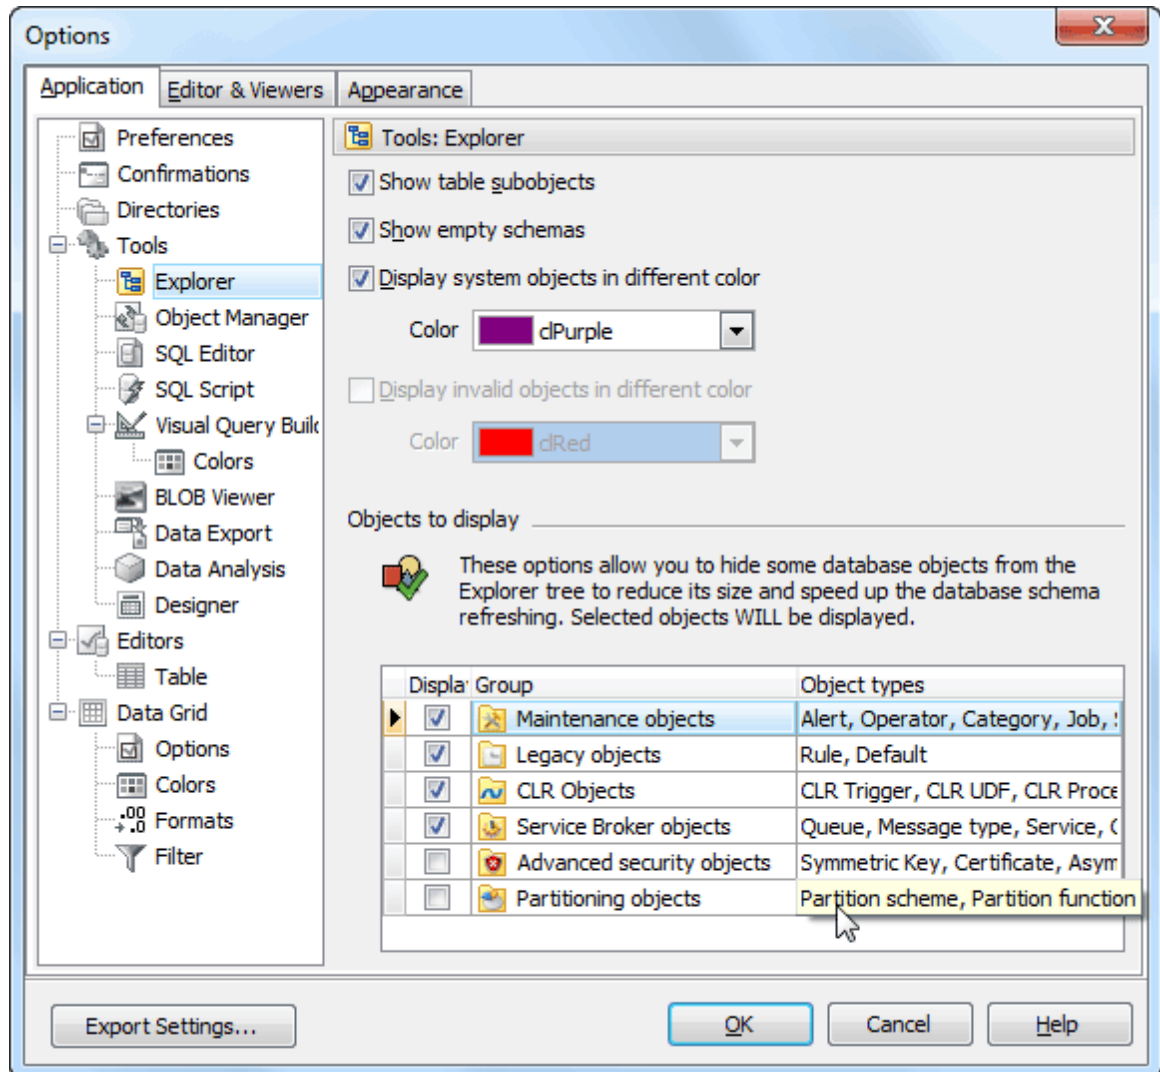

☒ **Show table subobjects**

Shows/hides table subobjects (fields and indexes) in the explorer tree.

☒ **Sort profiles by aliases**

Sorts profile aliases alphabetically in the explorer tree.

☒ **Expand the "Tables" node after connection**

Shows all database tables in the explorer tree after connecting to the database.

☒ **Expand the "Queries" node after connection**

Shows all database queries in the explorer tree after connecting to the database.


☒ **Display system objects in different color**

Represents all system objects in selected color.

You can also exclude/include rarely used objects from/to the Explorer tree. Manage object groups to be displayed at Explorer with corresponding checkboxes.

9.1.4.2 Object Manager

Below you will find a detailed decryption of the following [Object Manager](#) options.

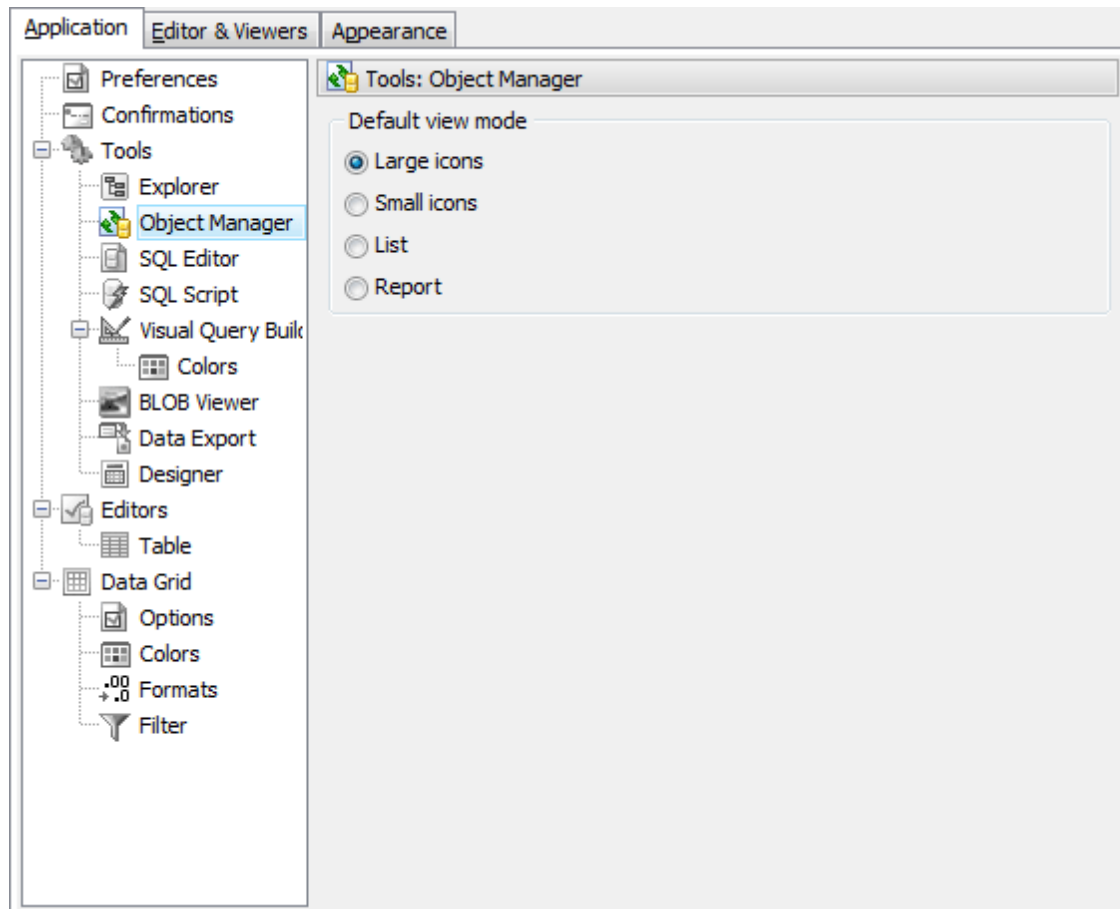


Default view mode

Defines which view mode (*large icons*, *small icons*, *list* or *report*) is applied to Object Manager by default.

9.1.4.3 SQL Editor

Below you will find a detailed decryption of the following [SQL Editor](#) options.

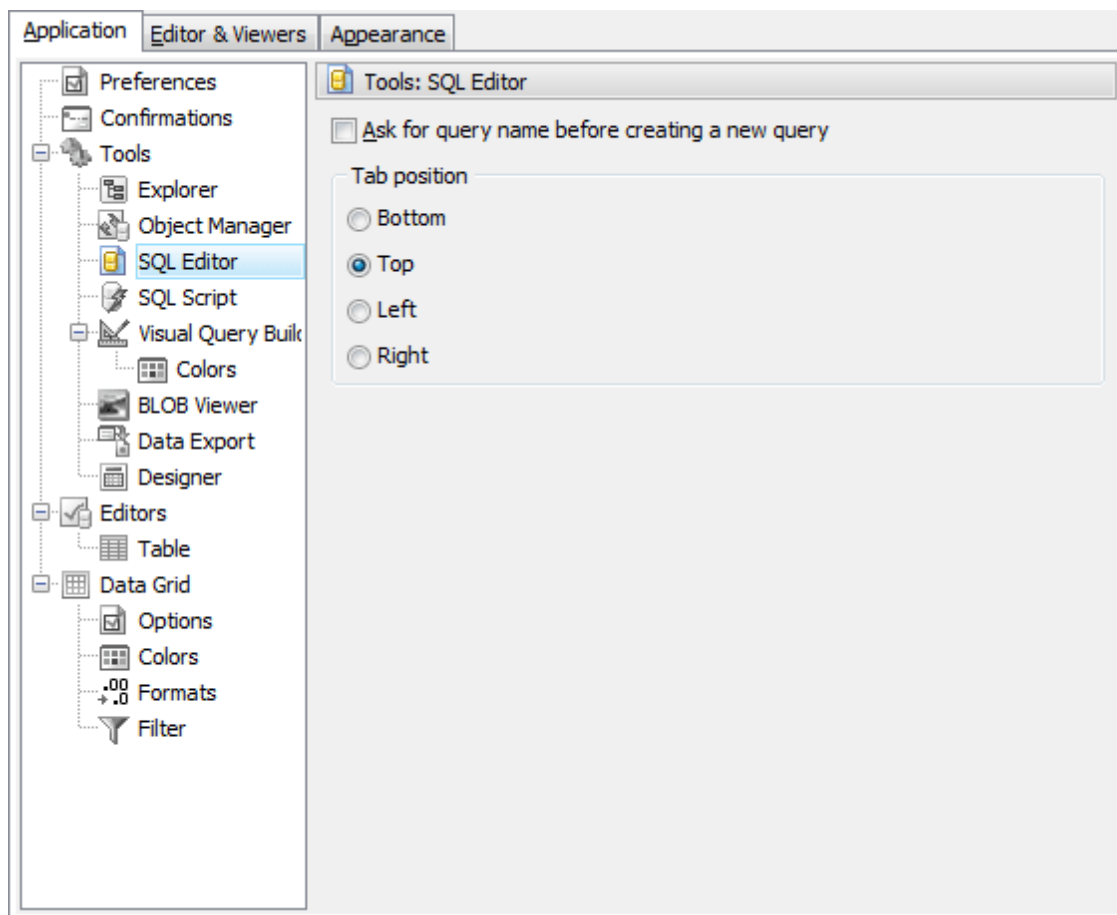

☒ **Ask for query name before creating a new query**

If this option is checked, [SQL Editor](#) asks for a query name each time you create a new query.


☒ **Auto commit**

Check the option to execute queries in autocommit mode (default value) or leave it blank to manage transactions manually.

You can also select [position](#) of query tabs.

9.1.4.4 SQL Script Editor

Below you will find a detailed decryption of the following [SQL Script Editor](#) options.

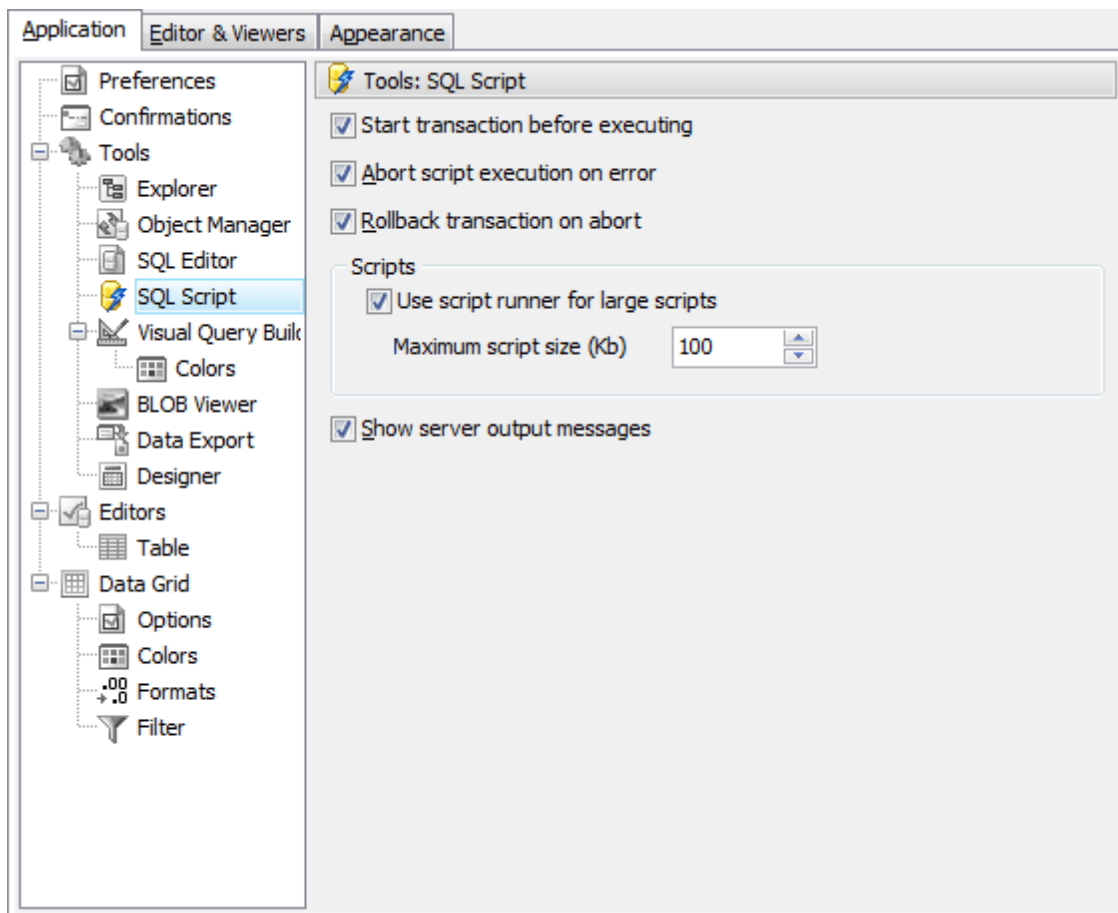

☒ **Abort script execution on error**

If this option is checked, script execution aborts when an error occurs.

☒ **Rollback transaction on abort**

This option evokes automatic rollback on script execution abort.

☒ **Use script runner for large scripts**


Check the box to execute large script in the fastest way. You can change the maximum size of a script to execute without script runner.

☒ **Show server output messages**

Turn the option ON to see warning messages generated by the server.

9.1.4.5 Query Builder

Below you will find a detailed decryption of the following [Query Builder](#) options.

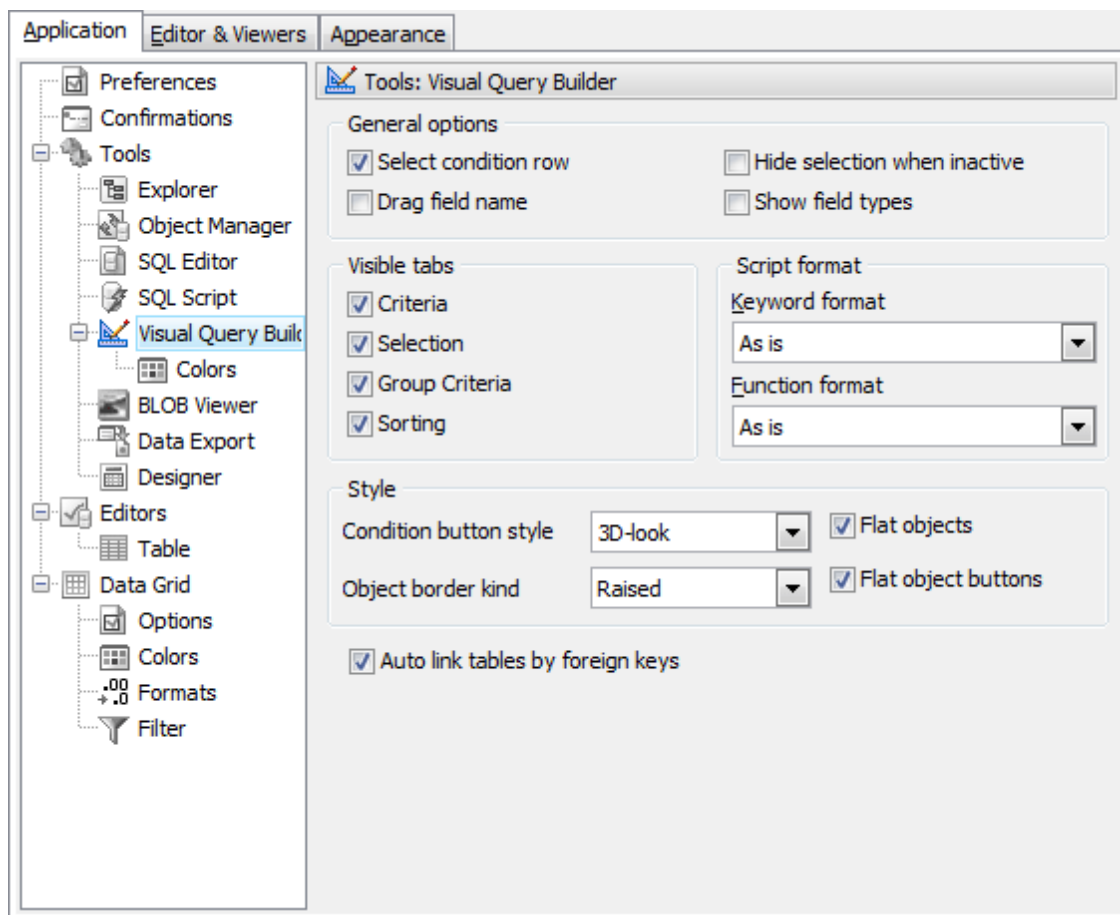

☒ **Select condition row**

Displays the selected condition in different row on the **Criteria** and **Grouping Criteria** tabs of **Visual Query Builder**.

☒ **Drag field name**

Displays the dragged field name in the **Builder** area.

☒ **Hide selection when inactive**

Hides the selection when the query builder is inactive.

☒ **Show field types**

Displays the field type next to the field in the table box.

Visible tabs

These options specify which the query builder tabs are available and which are not. Check them to make the appropriate tabs visible.

Script format

These options specify the case formatting of keywords and functions in query text on the **Edit** tab. **As is** saves the original case, **Uppercase** sets all the keywords/functions to upper case, **Lowercase** sets all the keywords/functions to lower case, and **First upper** sets the first letters of all keywords/functions to upper case.

Style

These options specify how different the [Query Builder](#) objects look like - 3D, flat, etc.

☒ Auto link tables by foreign keys


If tables that have foreign key reference are placed in [Query Builder](#), in diagram they will be auto linked.END

Colors

These options define colors of the different [Query Builder](#) elements: condition row, active caption, table client area, etc. Click an item to select a color for the appropriate Query Builder element.


9.1.4.5.1 Colors

The tab is provided to editing of the Query Builder color schema. Customize colors for all editor element according to your preferences.

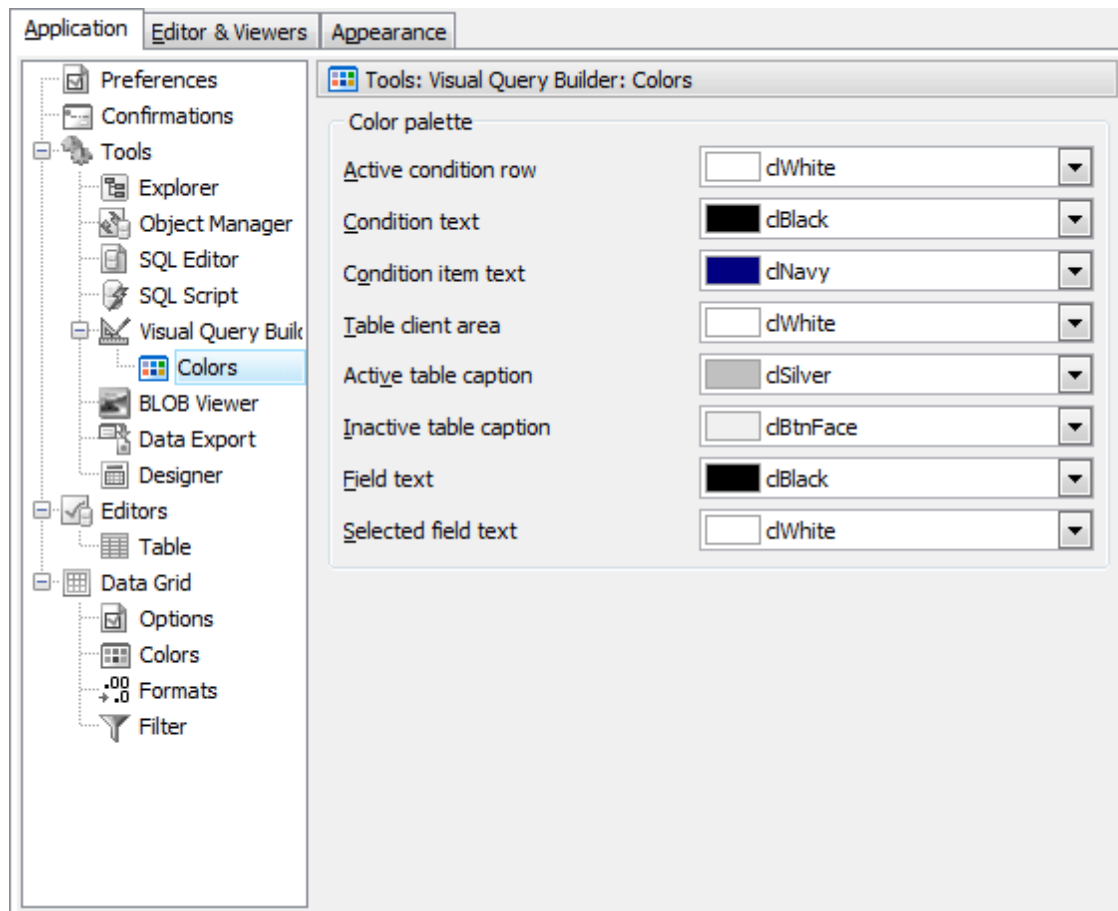

9.1.4.6 BLOB Viewer

Below you will find a detailed decryption of the following [BLOB Viewer](#)¹³⁷ options.

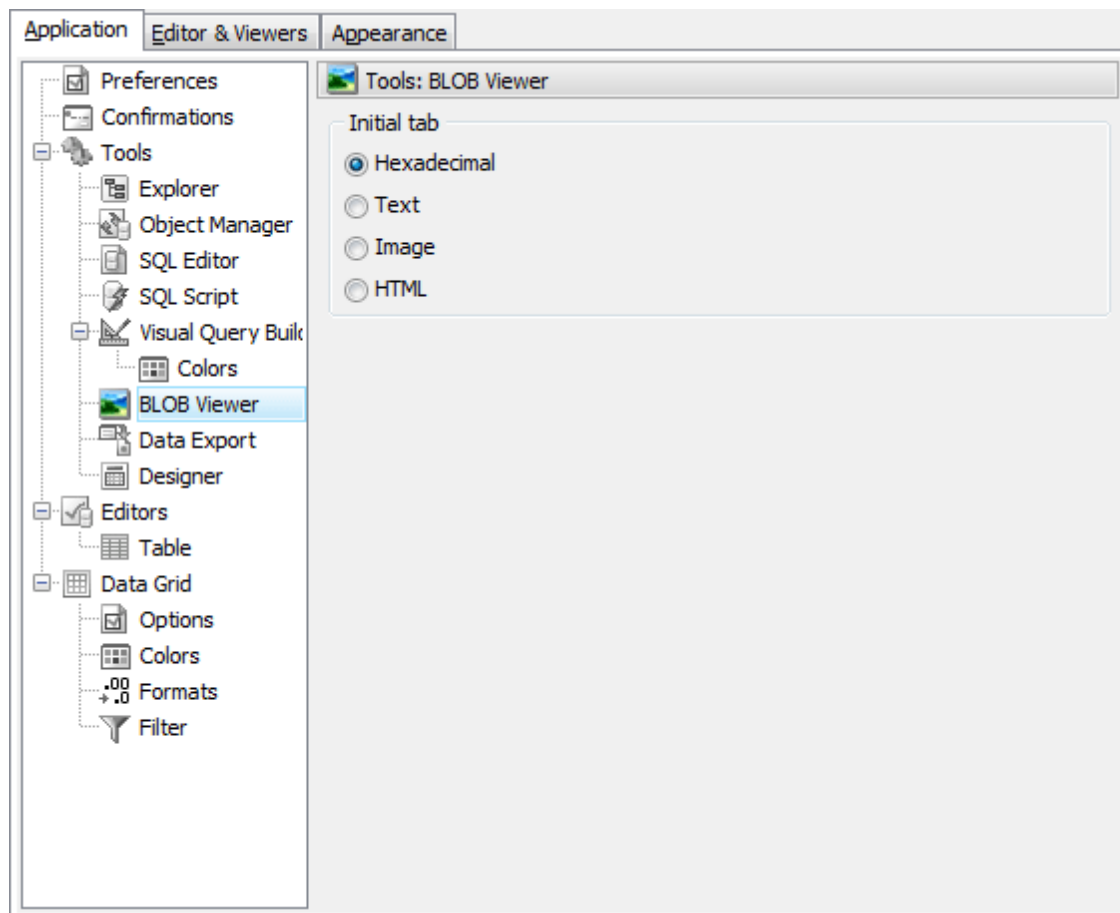

Initial tab

Specifies which tab of **BLOB Viewer** should be active when it is initially opened.


9.1.4.7 Data Export

This window allows you to customize formats applied to exported data. Edit the format masks to adjust the result format in the way you need.

In *numeric* formats using digit placeholder (# or 0) you can specify the format of number. For example, integer 1234567890 with # # # # # 0 integer format is represented like 1 234 567 890. The locations of the leftmost '0' before the decimal point in the format string and the rightmost '0' after the decimal point in the format string determine the range of digits that are always present in the output string.


Conversion and their description for *date*, *time* and *date time* format:

| | |
|----|--|
| dd | day of the month, represented by 1 or 2 symbols. For example, the first day of month is 1 |
| DD | day of the month, represented only by 2 symbols. For example, the first day of month is 01 |
| mm | minutes |

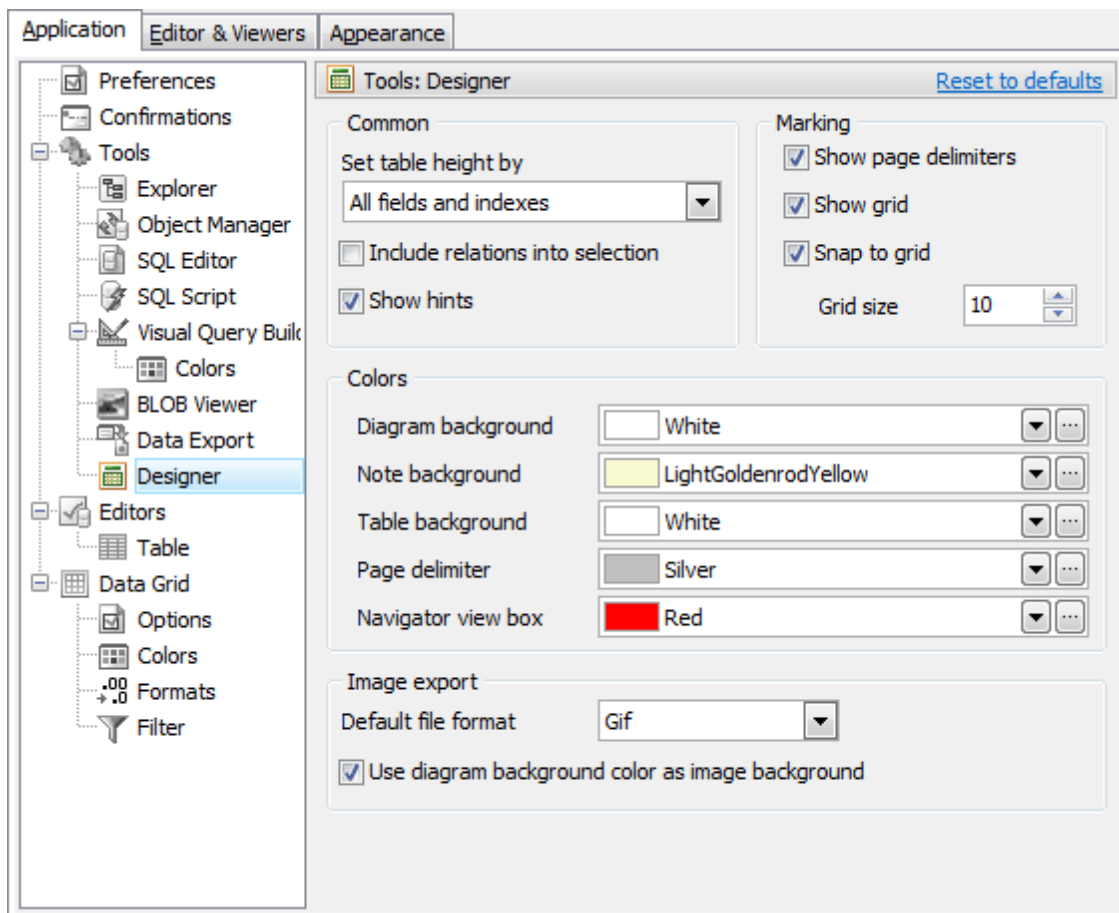

9.1.5 Object Editors

Below you will find a detailed description of the following object editors options.

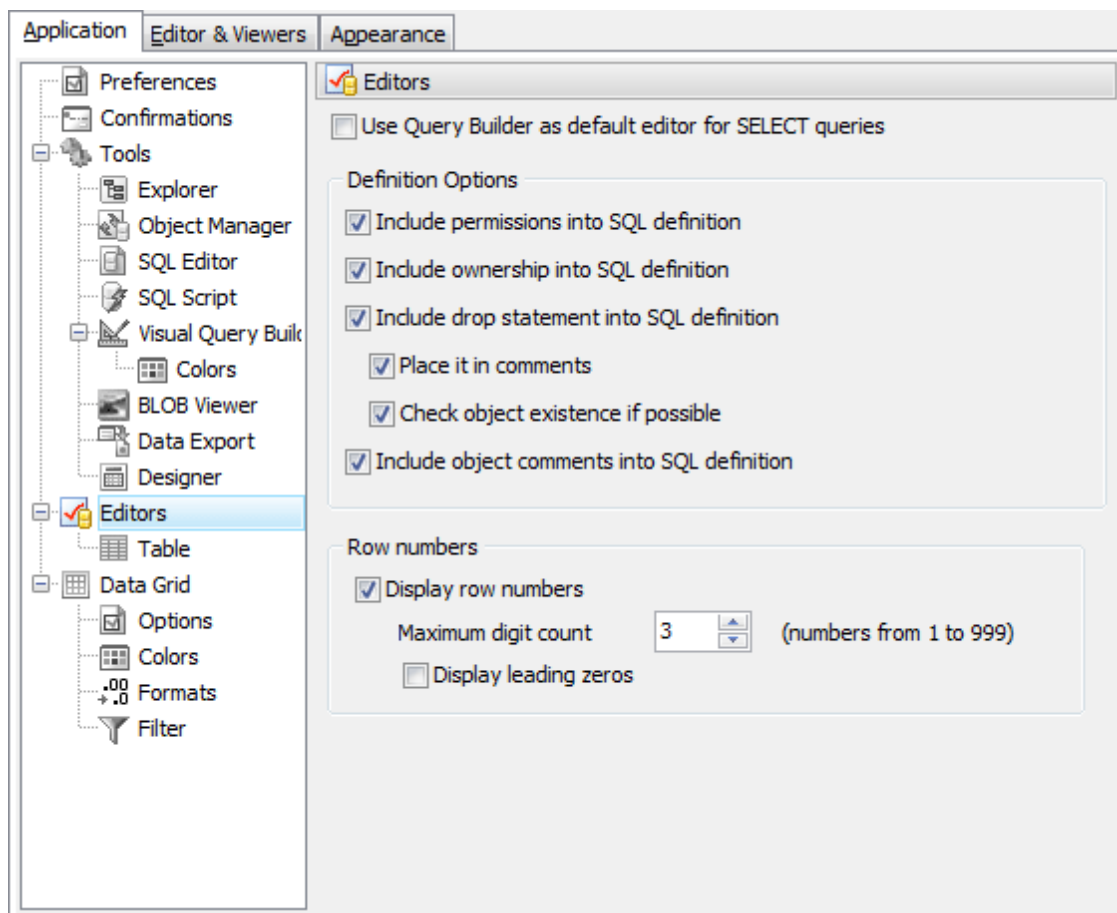

☒ **Open each object editor in a new window**

With this option checked a new child window opens each time you open an object for editing, otherwise the edited object is being changed in the existing object editor (except the existing object editor is in modified state).

☒ **Use Query Builder as default editor for SELECT queries**

With this option enabled all the SELECT queries will be opened in [Visual Query Builder](#) instead of [SQL Editor](#).

☒ **Include drop statement**

If checked, the SQL definition includes the drop statement.

☒ **Place it in comments**

With this option drop statement will be placed in comments of the SQL definition.

☒ **Include object comments into SQL definition**

With this option enabled comments that are specified for the object and object subitems are placed in SQL definition.

Row numbers

This options group allows you to manage the row numbering of the subobjects lists such as fields, indexes, parameters and so on.

To enable/disable the numbering, use [Display row numbers](#) checkbox. You can set the

number columns width with [Maximum digit count](#). (I.e. for the value '3' the max column number will be 999).

For uniformity you can use the [Display leading zeros](#) option. With this option enabled and maximum digit count '3' your numbering column will be of the form: '001, 002, 003, ...'.

9.1.5.1 Table

Initial tab

Specifies which tab of [Table Editor](#)^[60] should be active when it is initially opened.

☒ Retrieve record count before loading data in the data grid


With this option enabled all the `SELECT COUNT(*)...` query is executed before loading data in the data grid.

Default field type

Specifies the field type appearing in [Field Editor](#)^[64] by default.

9.1.6 Data Grid

Below you will find a detailed description of the following data grid options.

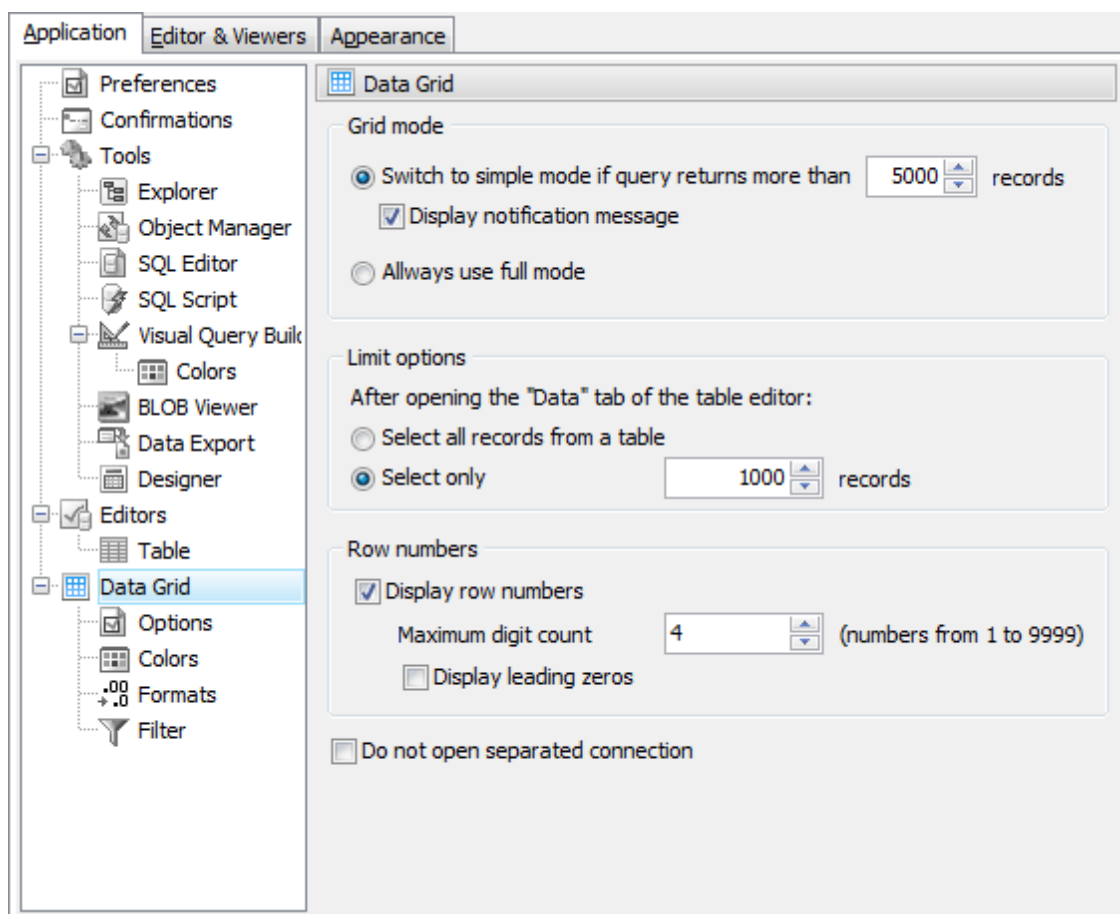

AnySQL Maestro provides you with [two grid modes](#)^[99] of viewing data:

- Fool grid mode allows you to group, filter and sort data in a usual way.
- Simple mode is provided for working with large records number. For data fetching speed-up, filtering, sorting, and grouping features are not enabled in this mode.

You can use [notification message](#) to indicate simple mode.

Set the number of records to switch to simple mode automatically or select [Always use full mode](#).

[Limit options](#)

Allows you either to select all records from table after opening the Data tab, or select only specified number of rows on one page with an ability to rotate pages and view all data.

[Row numbers](#)

This options group allows you to manage grid rows numbering.

To enable/disable the numbering, use [Display row numbers](#) checkbox. You can set the number columns width with [Maximum digit count](#). (I.e. for the value '3' the max column number will be 999).


For uniformity you can use the [Display leading zeros](#) option. With this option enabled and maximum digit count '3' you numbering column will be of the form: '001, 002, 003, ...'.

☒ [Do not open separated connection](#)

With this option enabled a new connections for fetching data is not opened. This gives you an ability to work with data a little bit faster, because time for opening a new connections is not demanded.

9.1.6.1 Options

Below you will find a detailed decryption of the data grid options.

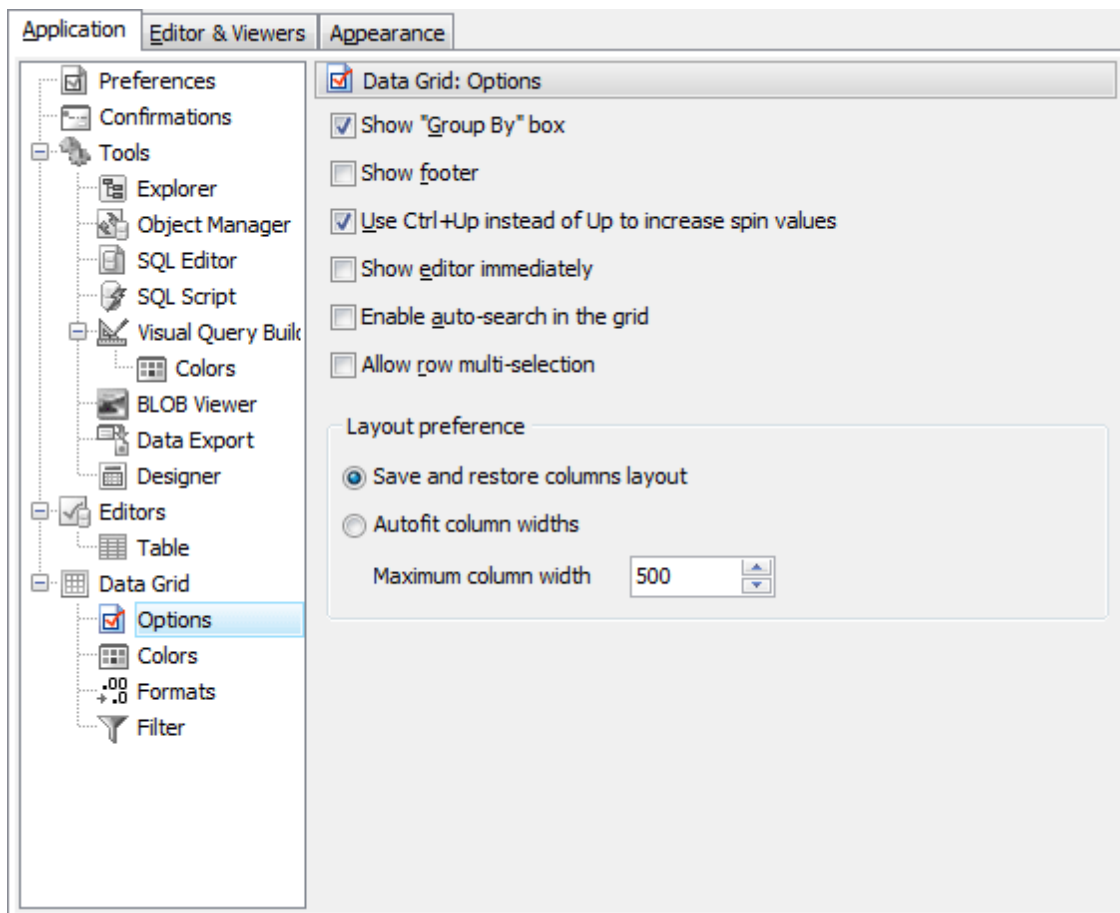

☒ **Show "Group By" box**

Shows the box on the top of the grid view for grouping data by fields.

☒ **Show footer**

Shows the footer on the bottom of the grid view.

☒ **Use Ctrl+Up instead of Up to increase spin values**

Allows you to use Ctrl+Up and Ctrl+Down key combinations for editing the spin for numeric fields.

☒ **Show editor immediately**

Allows editing the cell value right after the cell is clicked.

☒ **Enable auto-search in the grid**

Allows you to search records in the grid by the first letters.

☒ **Allow row multi-selection**


Allows you to select multiple records using the Ctrl and Shift keys.

Layout preference

Select whether AnySQL Maestro should remember the column positions for the grids or fit them automatically.

9.1.6.2 Colors

Below you will find a detailed decryption of the following colors options.

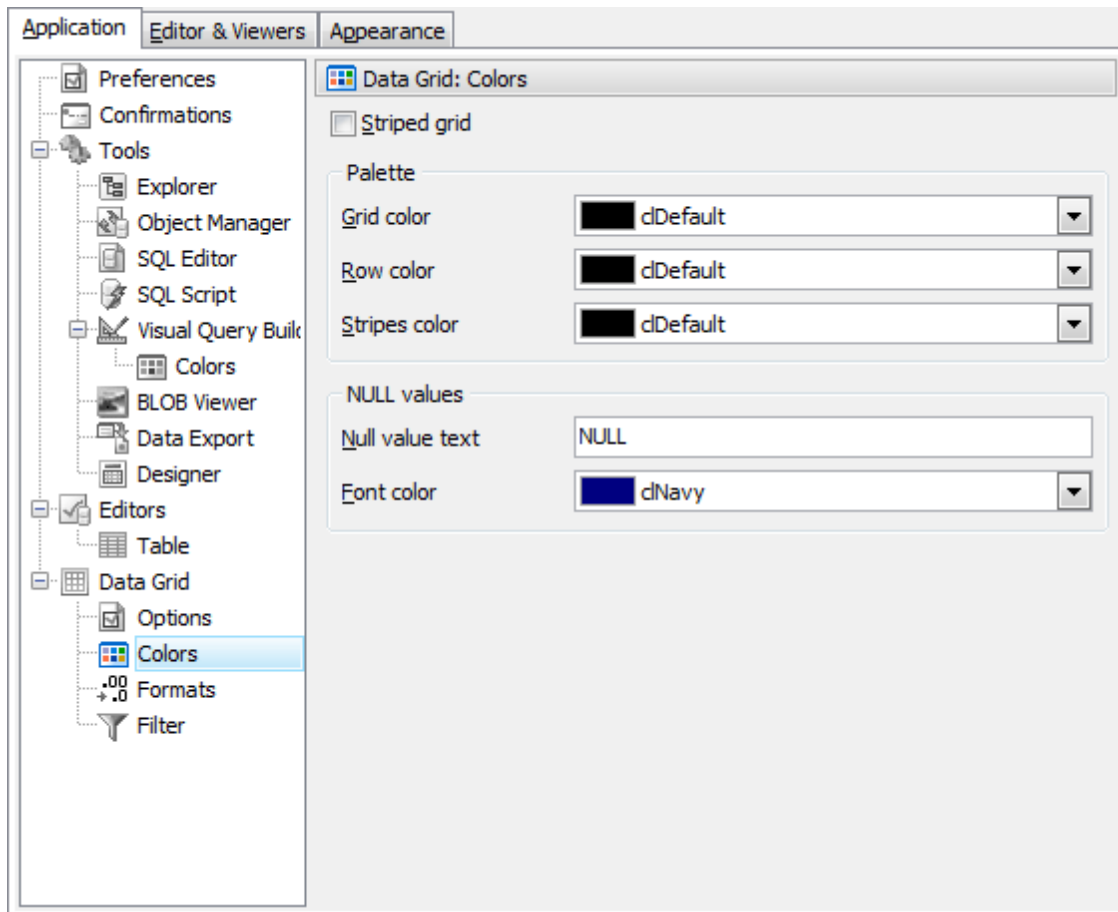

☒ Striped grid

Displays the odd grid rows in a different color defined by the [Stripes color](#) option.

Grid color

Defines the background color of the data grid.

Row color

Defines the color of the selected row in the data grid.

Stripes color


Defines the color of the odd rows if the [Striped Grid](#) option is on.

Null values

Use [Null value text](#) to define the text that stand for the NULL value and use [Font color](#) to set the color for displaying this text.

9.1.6.3 Formats

Below you will find a detailed decryption of the following formats options.

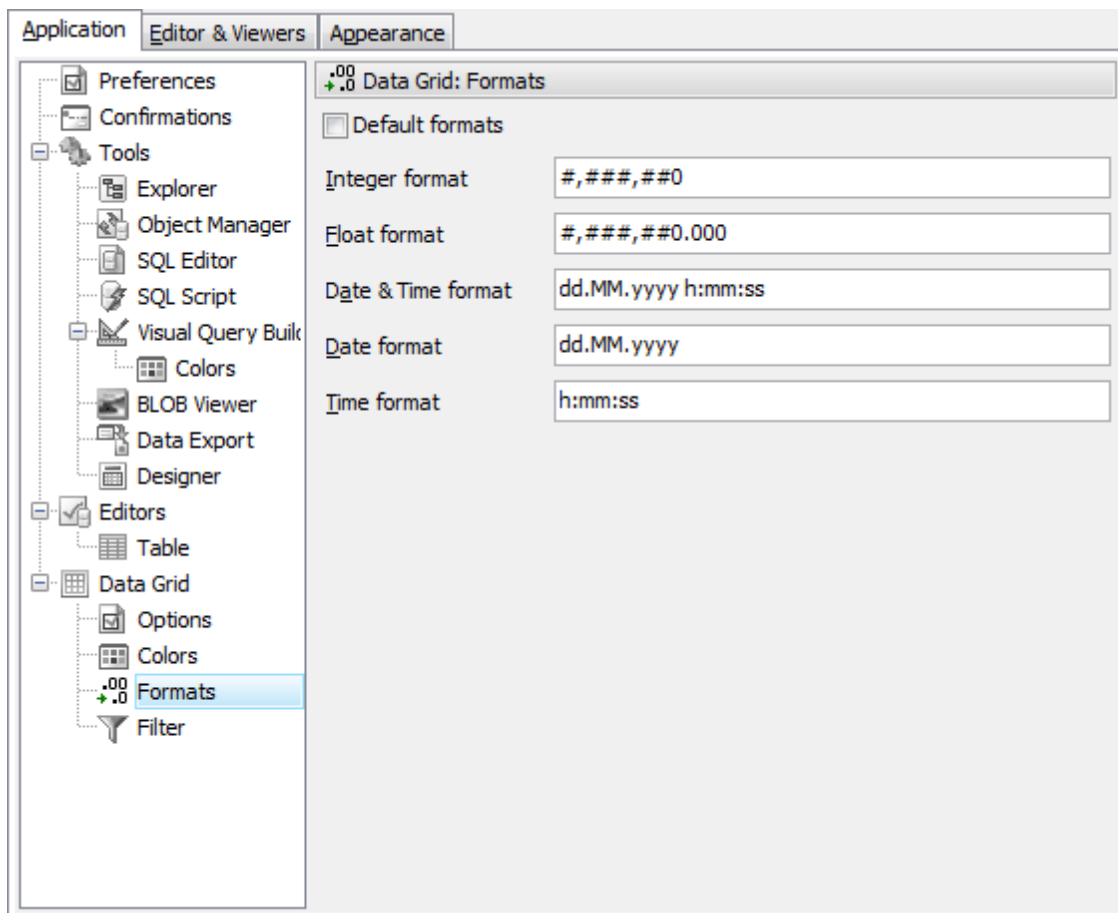

This window allows you to customize formats applied to data in grid. Edit the format masks to adjust the result format in the way you need.

In *numeric* formats using digit placeholder (# or 0) you can specify the format of number. For example, integer 1234567890 with # # # # # 0 integer format is represented like 1 234 567 890. The locations of the leftmost '0' before the decimal point in the format string and the rightmost '0' after the decimal point in the format string determine the range of digits that are always present in the output string.

Conversion and their description for *date*, *time* and *date time* format:


| | |
|----|--|
| dd | day of the month, represented by 1 or 2 symbols. For example, the first day of month is 1 |
| DD | day of the month, represented only by 2 symbols. For example, the first day of month is 01 |
| mm | minutes |
| MM | month |
| yy | year, represented by 2 symbols. For example, 2006 year will be 06 |

| | |
|------|--|
| yyyy | year, represented by 4 symbols. For example, 2006 |
| h | hour, represented by 1 or 2 symbols. For example, 2 |
| hh | hour, represented only by 2 symbols. For example, 02 |

(".", ",", ":") symbols can be placed as separators in format masks for *integer*, *float*, *date*, *time*, *date time*, *currency* types.

9.1.6.4 Filter

These options allows you to customize data filtering in grids.

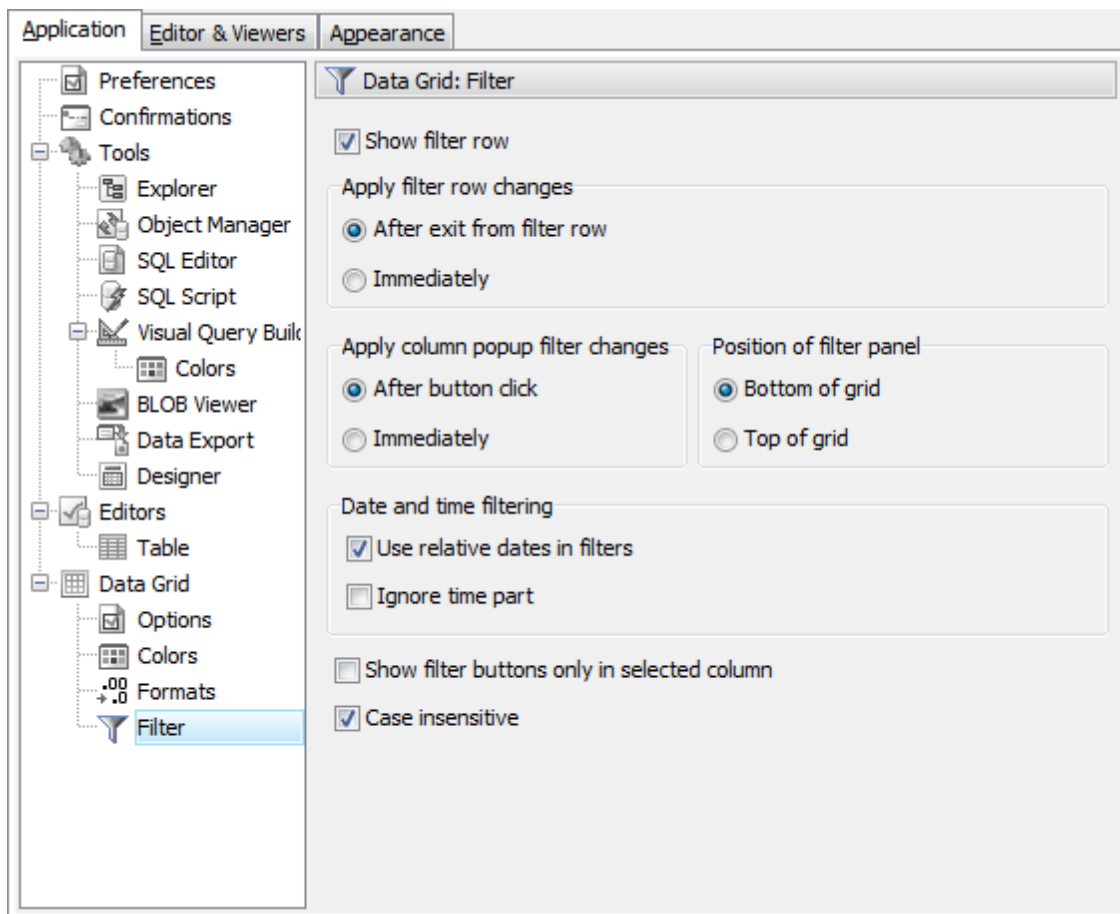☒ Show filter row

When checked the filter row is always represented in the data grid as an additional row.

[Apply filter row changes](#) and [Apply column popup filter changes](#) allows you to manage the speed of the data filtering. To speed-up the process select [Immediately](#) as the time the filter you are set will be applied.

Change the **Position of filter panel** and customize timestamp data filtering: check the **Use relative dates in filters** box to include in column popup filter such options as "Yesterday",

"Today", "Tomorrow", "Last 30 day", "Last week", "Next week", and others; check the [Ignore time part](#) box to neglect time part of timestamp data under the filtering.

By default filter buttons are shown at all columns header, to [show filter button only in selected column](#), check the corresponding option.

You can specify the case sensitivity of the grid filter with the [Case insensitive](#) checkbox (ON by default).

9.2 Editors & Viewers

The [Editors & Viewers](#) section allows you to set the parameters of viewing and editing the SQL statements within AnySQL Maestro.

- [General](#) ^[197]
- [Display](#) ^[198]
- [SQL highlight](#) ^[199]
- [PHP highlight](#) ^[201]
- [XML highlight](#) ^[200]
- [Code Insight](#) ^[202]
- [Code Folding](#) ^[203]

See also: [SQL Editor](#) ^[88], [SQL Script Editor](#) ^[133], [Visual Query Builder](#) ^[88], [Table Editor](#) ^[60].

9.2.1 General

If the [Auto indent](#) option is checked, each new indentation is the same as the previous when editing SQL text.

☒ [Insert mode](#)

If this option is checked, insert symbols mode is default on.

☒ [Use syntax highlight](#)

Enables syntax highlight in the object editor window.

☒ [Always show links](#)

If this option is checked, hyperlinks are displayed in the editor window. To open a link click it with the **Ctrl** button pressed.

☒ [Show line numbers](#)

If this option is checked, line numbers are displayed in the editor window.

☒ [Show special chars](#)

If this option is checked, special chars (like line breaks) are displayed in the editor window.

☒ [Use smart tabs](#)

With this option on the number of tab stops is calculated automatically, depending on the previous line tab.

☒ [Convert tabs to spaces](#)


If this option is checked, each time you press the Tab key, the appropriate number of spaces will be added to the edited text.

[Tab Stops](#)

Defines the tab length, used when editing text.

Undo Limit


Defines the maximum number of changes possible to be undone.

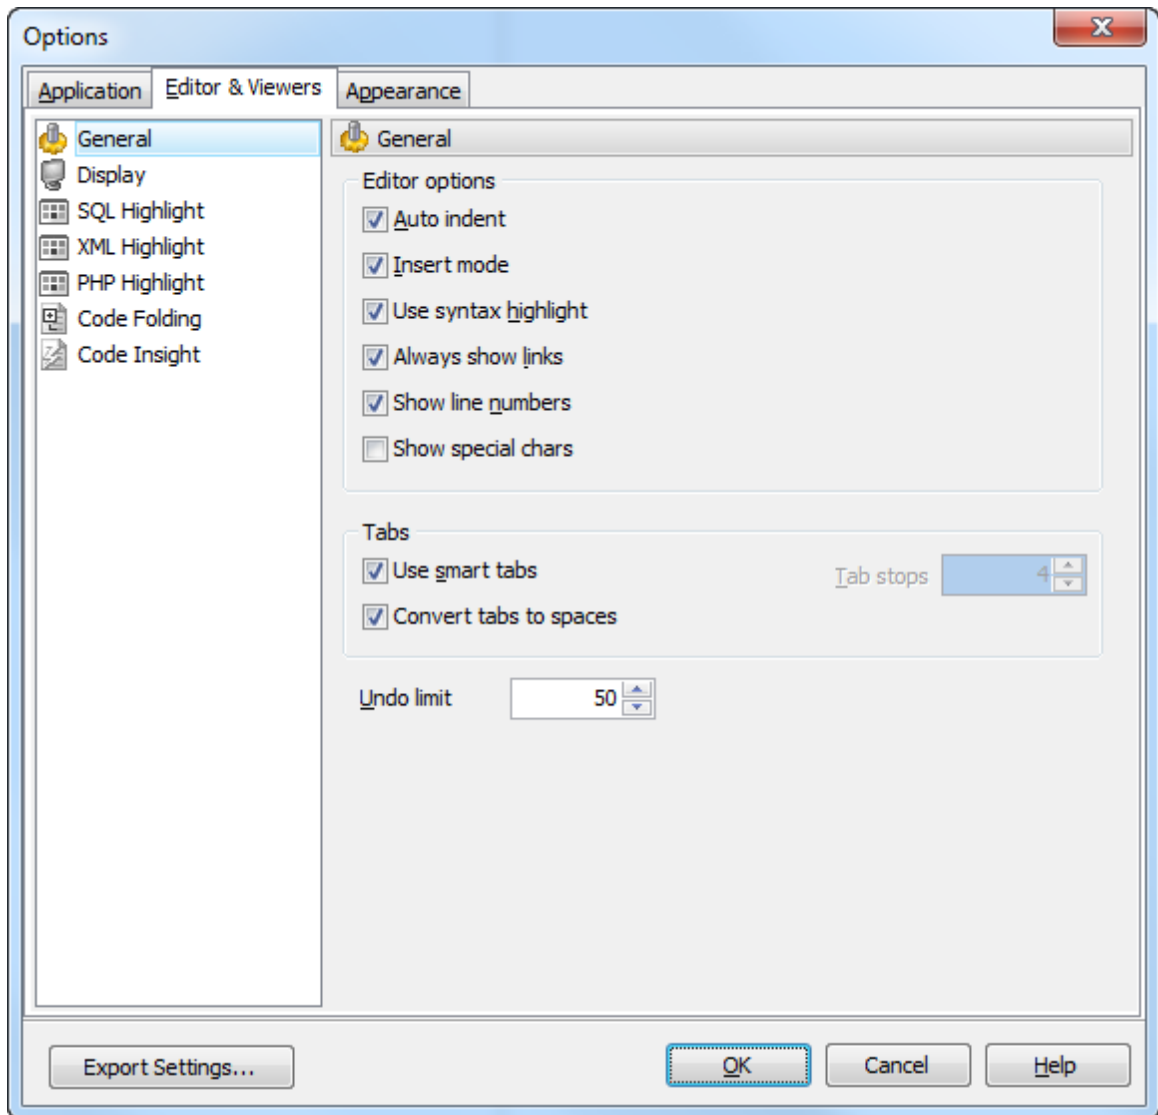

9.2.2 Display


You can disable/enable the right text margin and the gutter of the editor area, set the position of the right text margin as [Right margin](#), and [the Gutter width](#).

Use the [Editor font](#) and [Font size](#) to define the font used in all program editors and viewers. The panel below displays the sample of the selected font.

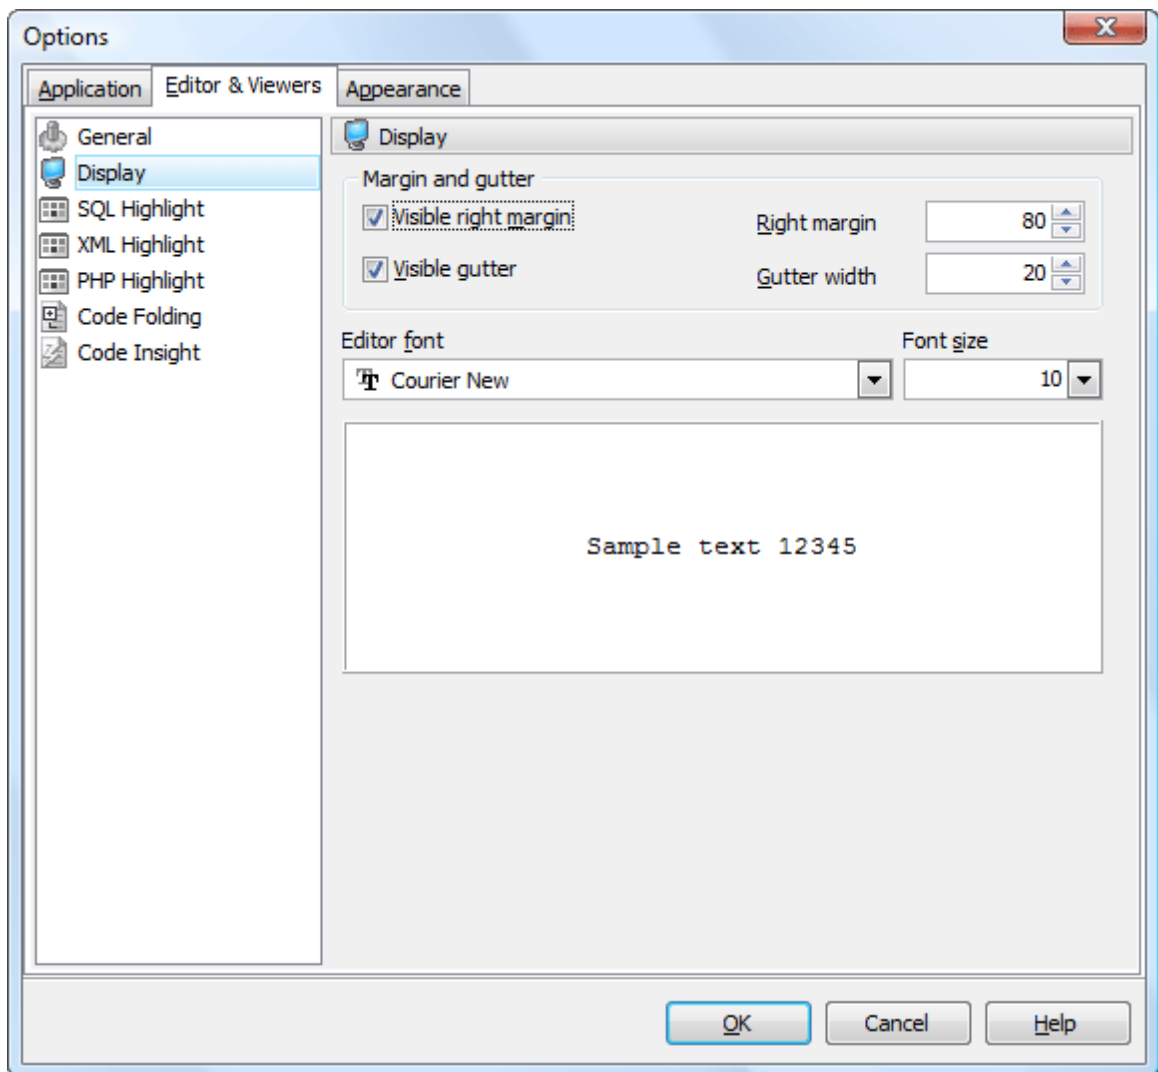


9.2.3 SQL highlight

Use the [SQL highlight](#) item to customize syntax highlight in all SQL editors and viewers, e.g. in [SQL Editor](#), [Query Builder](#), [Table Editor](#) and others. Select the text element from the list, e.g. *comment* or *SQL keyword* and adjust its foreground color, background color and text attributes according to your preferences.

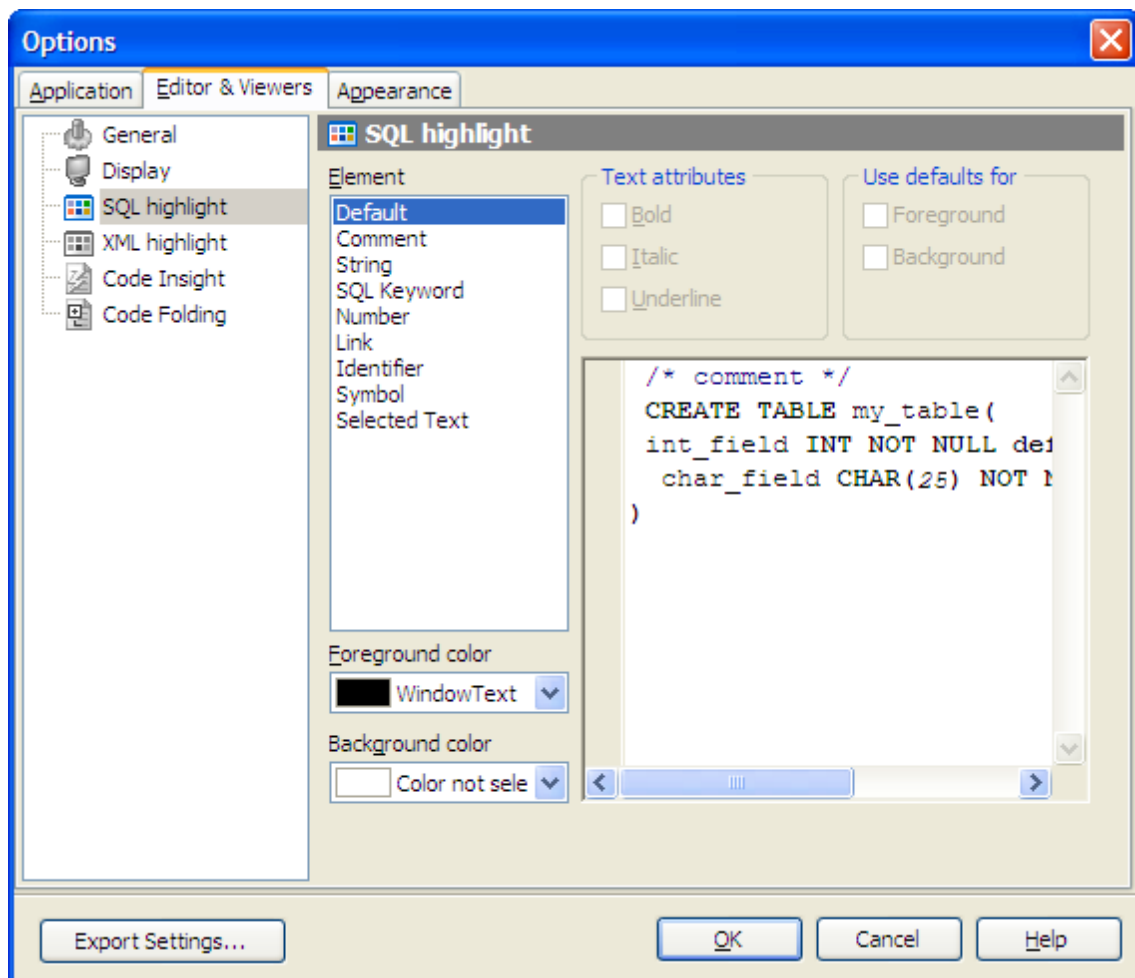


9.2.4 XML highlight

Use the [XML highlight](#) item to customize XML syntax highlight for the text representation of BLOBs in [BLOB Viewer/Editor](#). Select the text element from the list, e.g. attribute or attribute value and adjust its foreground color, background color and text attributes according to your wishes.

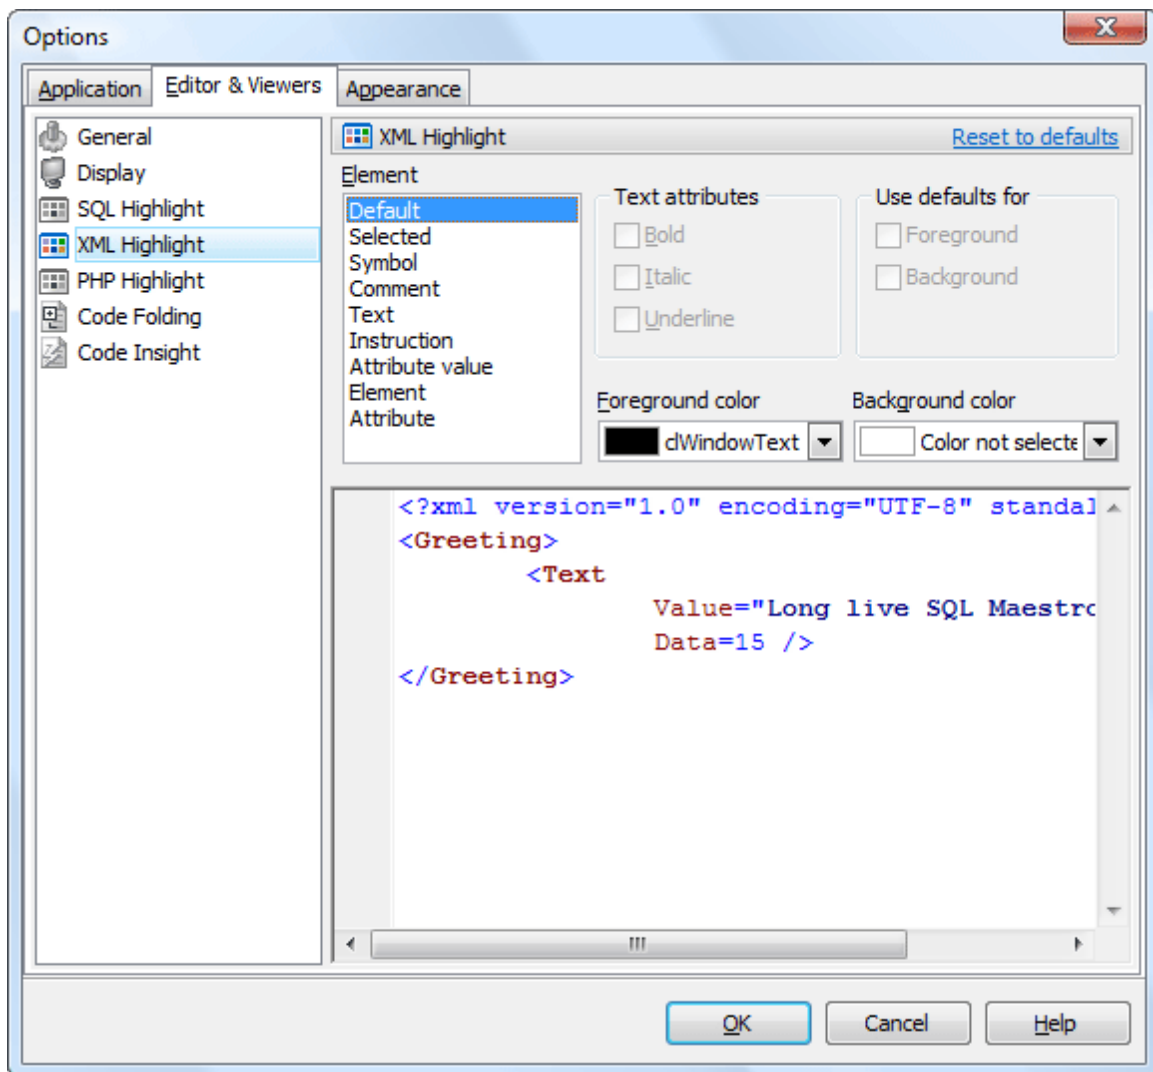


9.2.5 PHP highlight

Use the [PHP highlight](#) item to customize PHP syntax highlight for the text representation of BLOBs in [BLOB Viewer/Editor](#). Select the text element from the list (e.g. Keyword, Comment, Identifier), and adjust its foreground color, background color and text attributes according to your wishes.

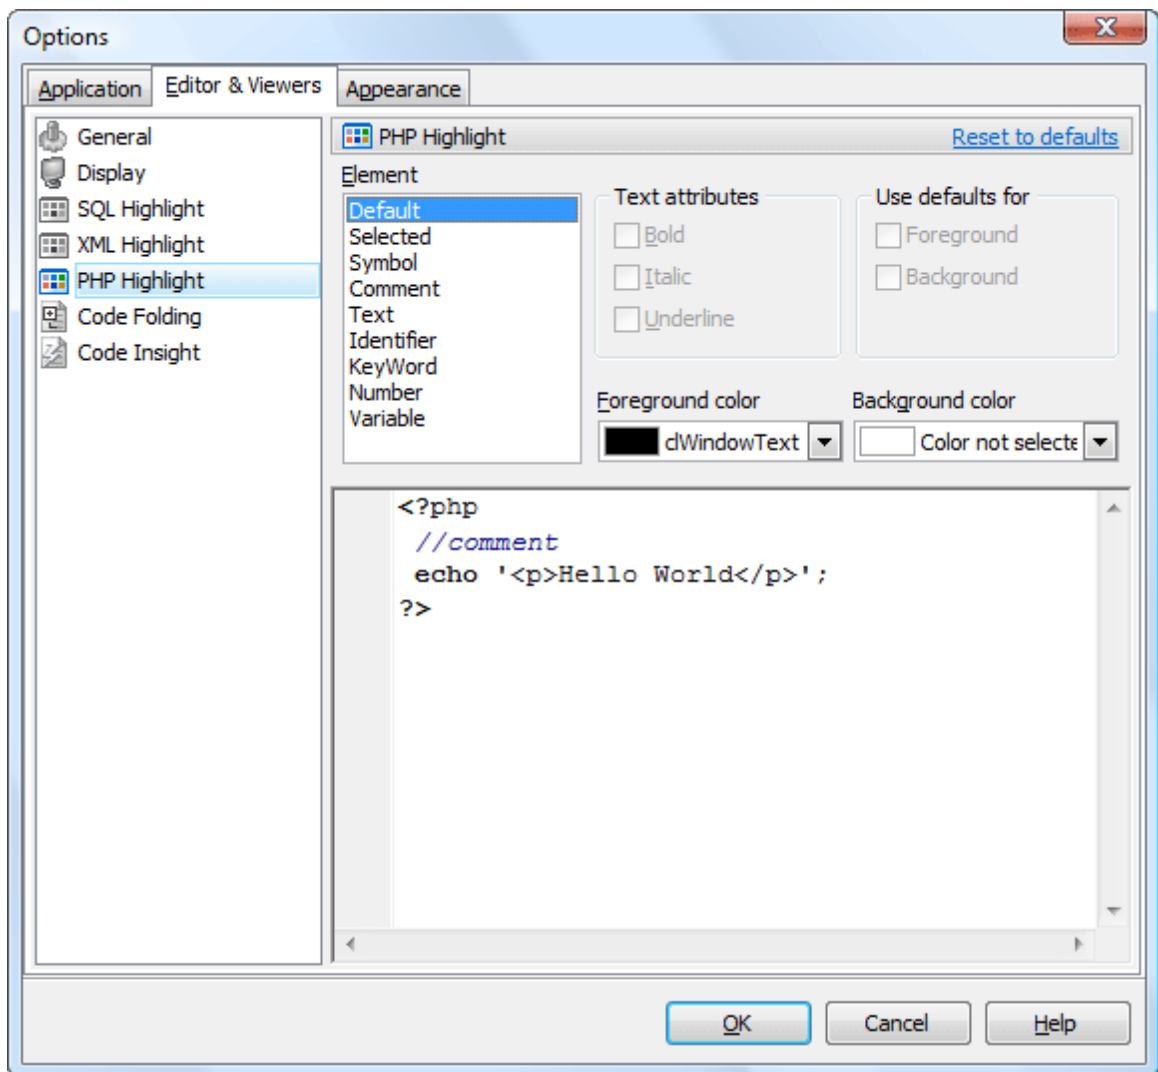


9.2.6 Code Insight

You can disable/enable the code completion with the corresponding option and also set the time it appears as *Delay*, and case of words inserted automatically.

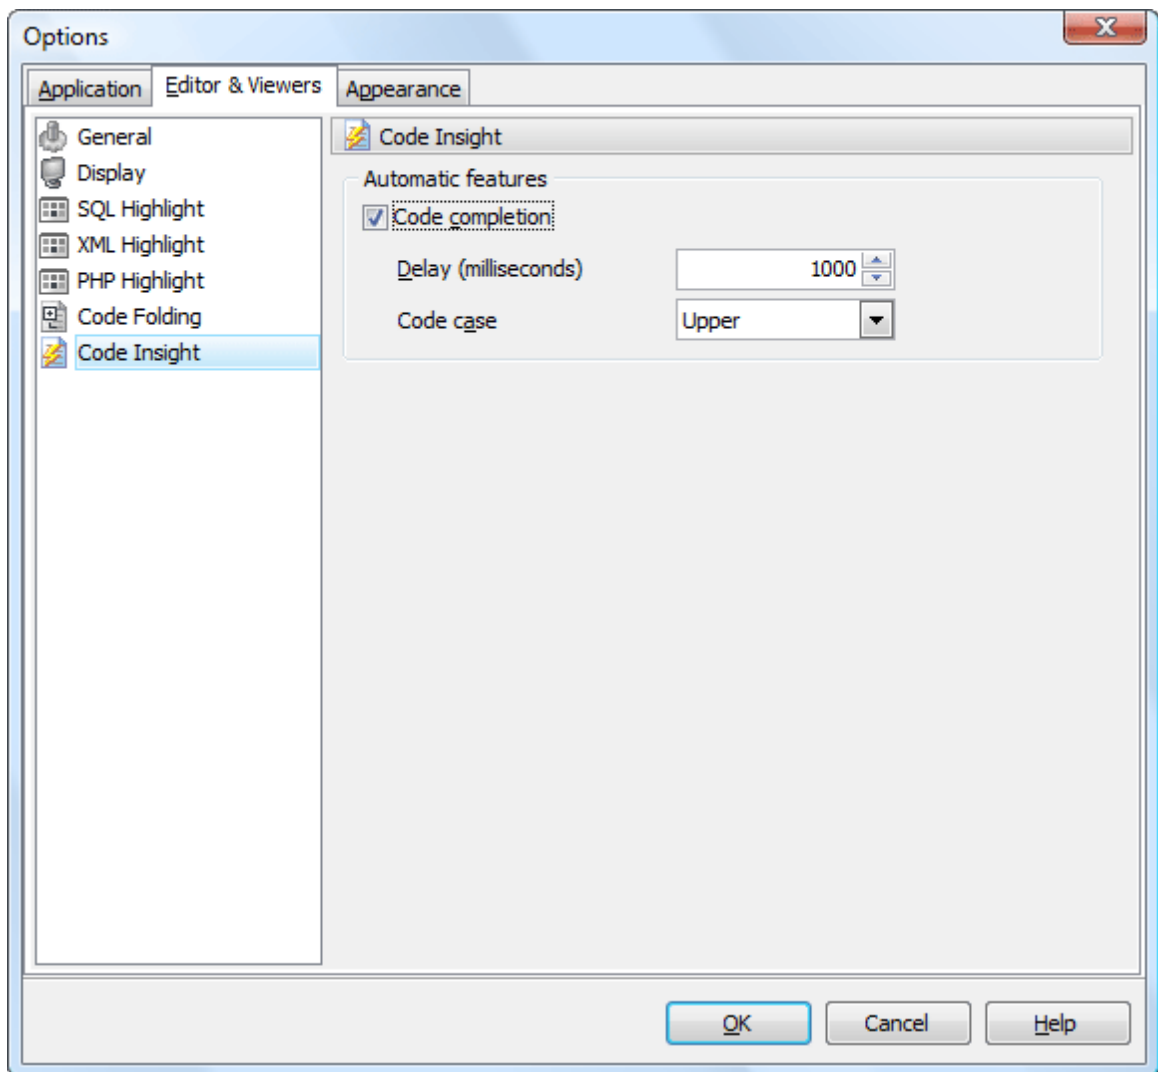

9.2.7 Code Folding

The [Code Folding](#) item group makes it possible both to view the whole text and to divide it into logical parts (regions). Each part can be collapsed and extended. In extended mode the whole text is displayed (set by default), in collapsed mode the text is hidden behind one text line denoting the first line of the collapsed region.

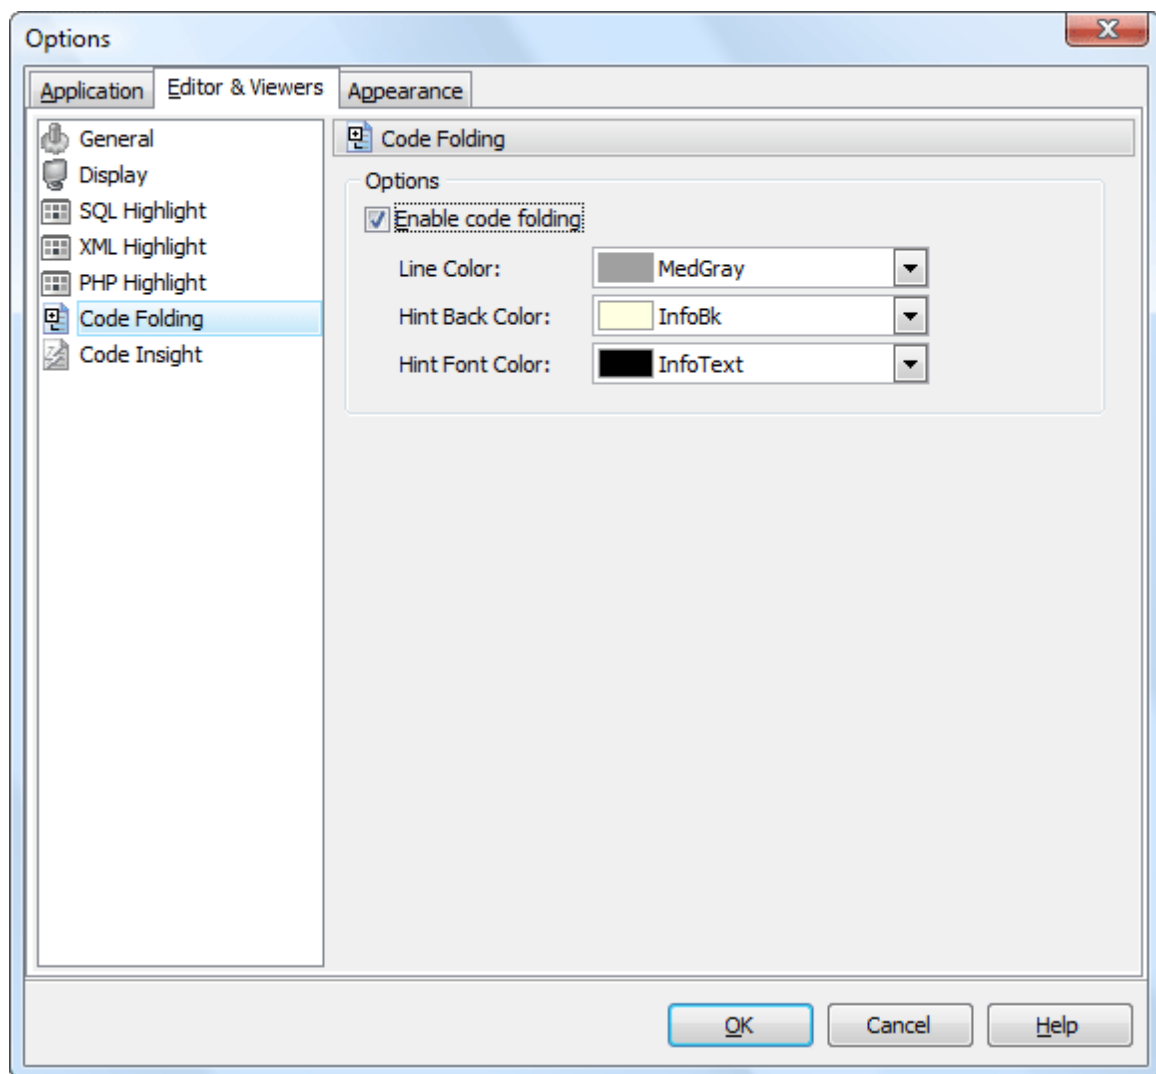

You can enable/disable code folding in SQL editors and viewers and customize the colors of its items.

9.3 Appearance

The [Appearance](#) section allows you to customize the application interface style to your preferences.


Use the [Scheme name](#) box to select the interface scheme you prefer: *Office XP style*, *Windows XP native style*, etc. You can create your own interface schemes by customizing any visual options ([Bars and menus](#), [Trees and lists](#), [Edit controls](#), [Check boxes](#), [Buttons](#), etc.) and clicking the [Save As](#) button. All the customized options are displayed on the sample panel.

- [Bars and menus](#) ^[205]
- [Trees and lists](#) ^[206]
- [Edit controls](#) ^[207]
- [Check boxes](#) ^[208]
- [Buttons](#) ^[209]
- [Page controls](#) ^[210]
- [Group boxes](#) ^[211]
- [Splitters](#) ^[212]

9.3.1 Bars and menus


Use the [Bars and menus](#) item to customize AnySQL Maestro toolbars style and menus animation.

The item allows you to select Bar style and menu animation from the corresponding drop-down lists and to enable or disable such options as sunken border, F10 key for opening menu, viewing full menus after delay, flat close buttons, gray-scale images.

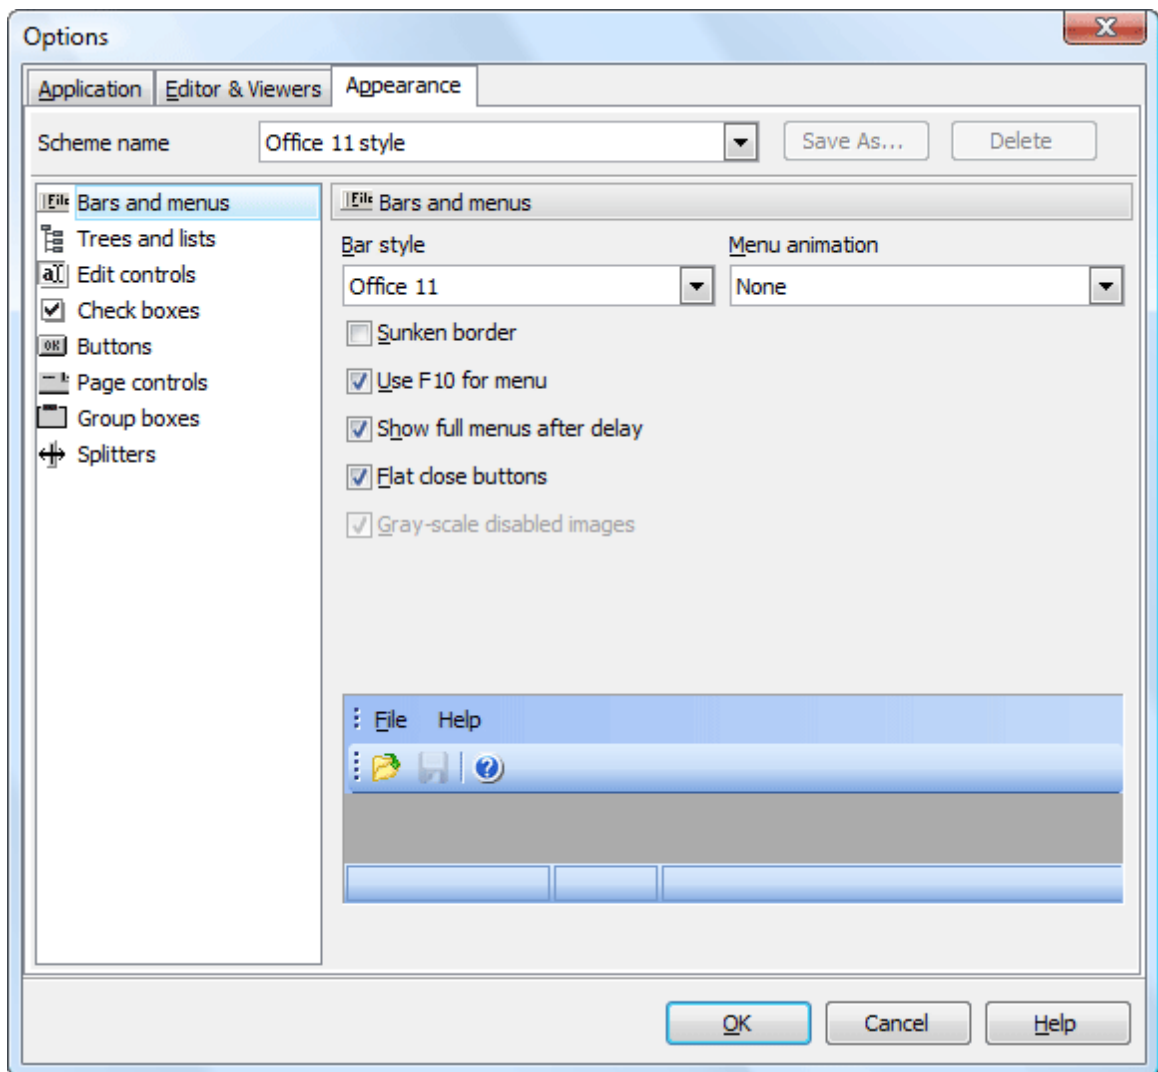


9.3.2 Trees and lists

Use the **Trees and lists** item to select various tree view options. Use the item to select *standard*, *flat* or *ultraflat* styles, check or uncheck the *hide selection*, *hide focus rectangle* and *native style* options.

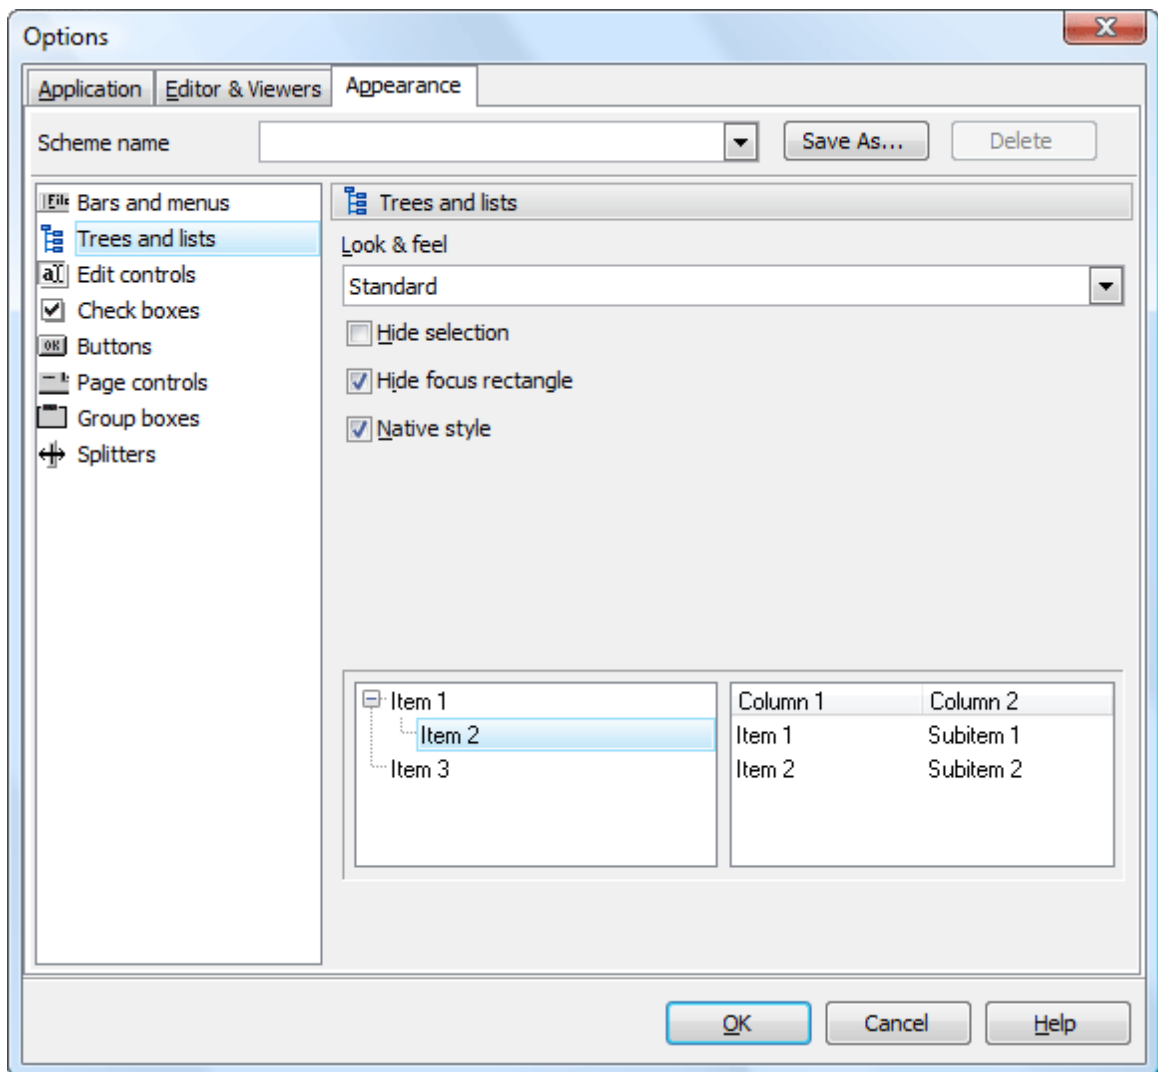


9.3.3 Edit controls

Use the [Edit controls](#) item to customize the appearance of different AnySQL Maestro edit controls. The tab allows you to select the edit controls border style, button style and transparency, enable/disable hot tracks, shadows, native style and customize edges. It is also possible to define samples for the text edit, button edit and combo box controls.

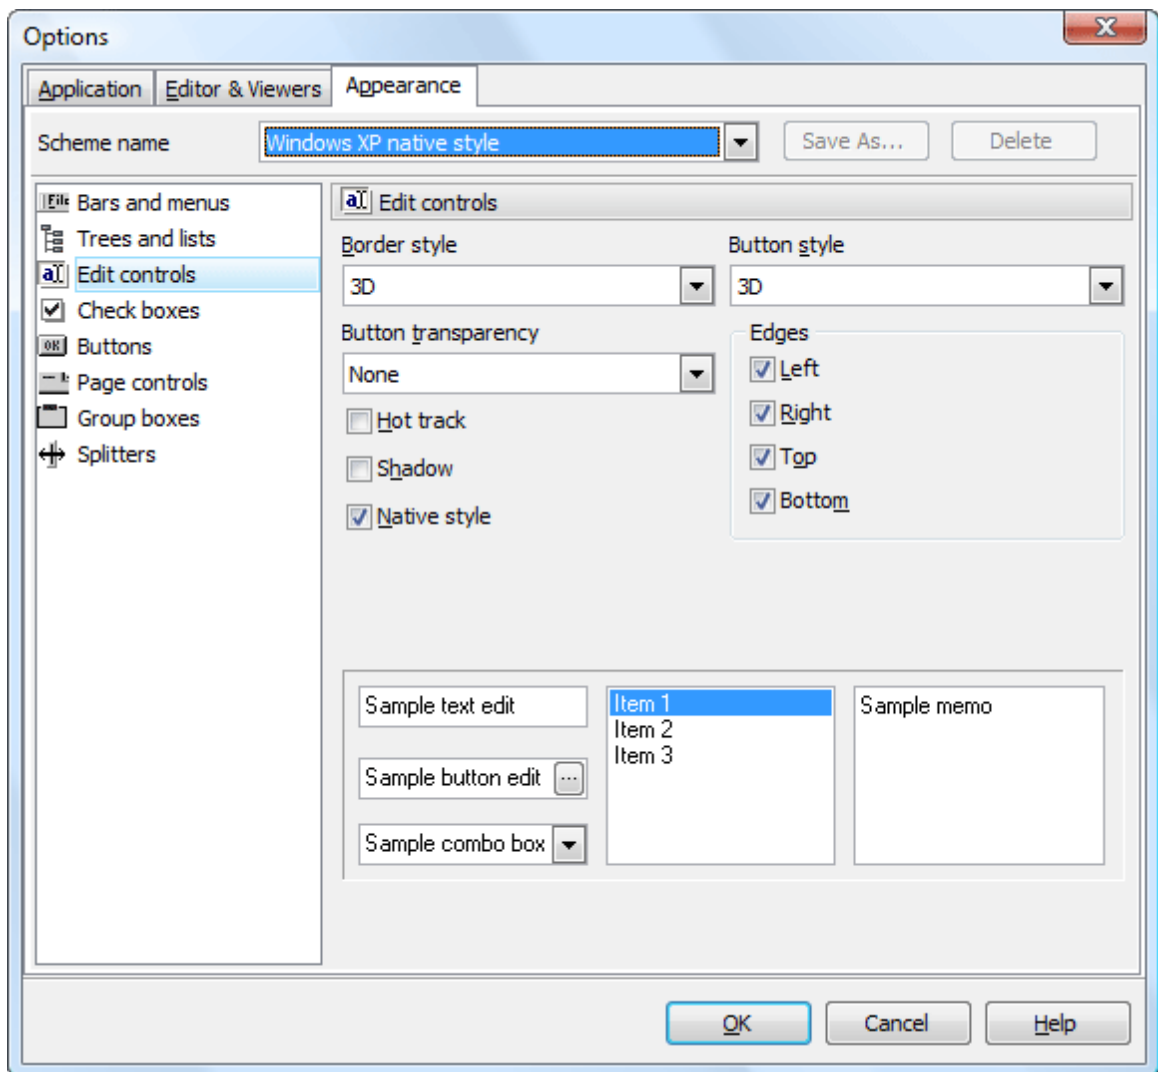


9.3.4 Check boxes

The [Check boxes](#) item allows you to customize the appearance of check boxes and radio buttons. The tab allows you to customize the appearance of check boxes: set border style, enable/disable hot tracks, shadows, native style. It is also possible to define samples for check boxes and radio buttons.

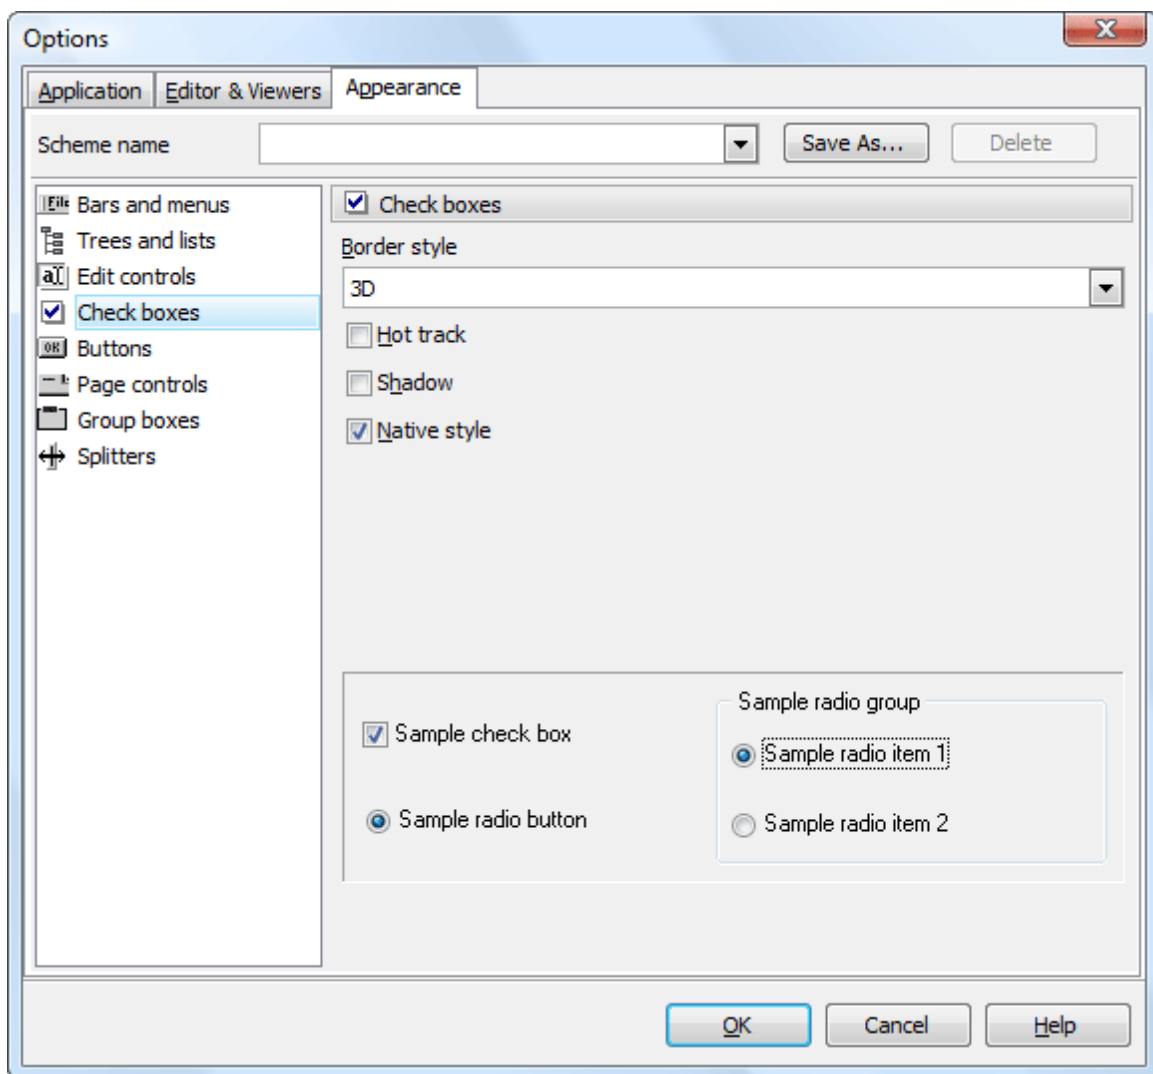


9.3.5 Buttons

Use the [Buttons](#) item to customize AnySQL Maestro buttons. The tab allows you to adjust the appearance of buttons and define sample buttons as well.

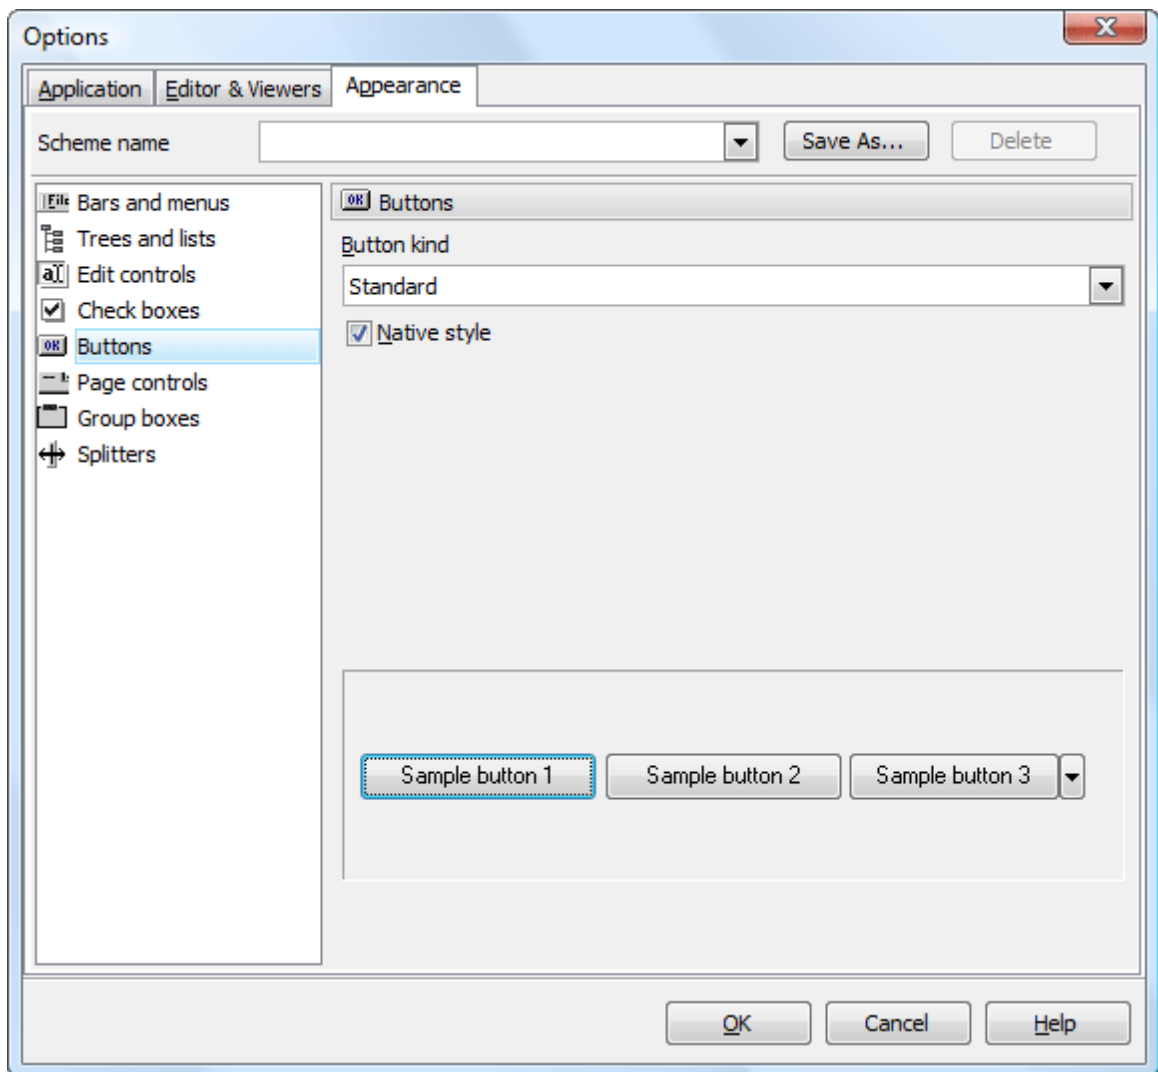


9.3.6 Page controls

The [Page controls](#) item allows you to customize the style of all AnySQL Maestro page controls. The tab allows you to select tab styles, enable/disable hot track, multi-line pages and native style.

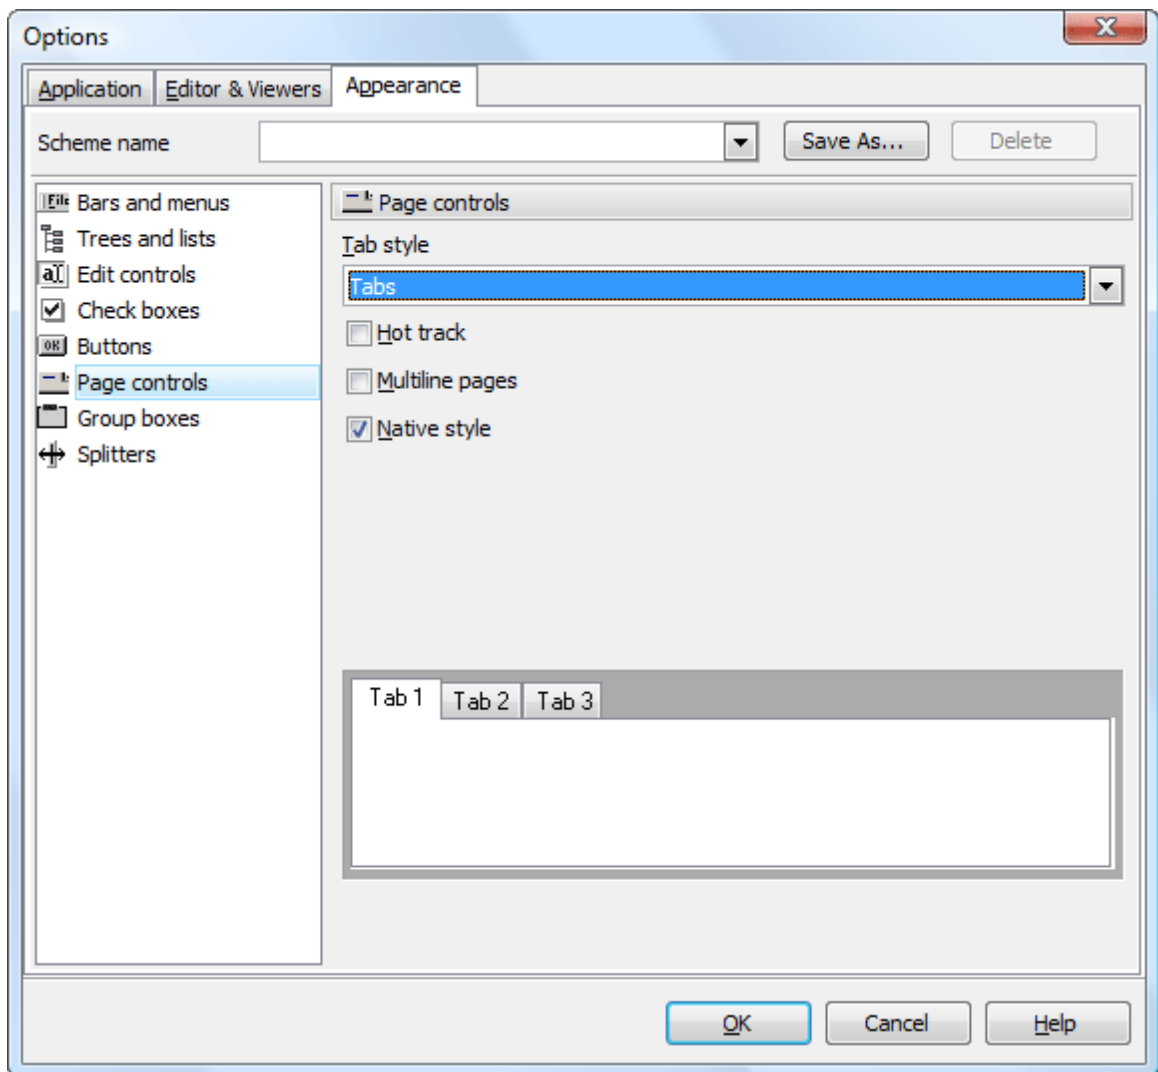


9.3.7 Group boxes

Use the [Group boxes](#) item to customize all AnySQL Maestro group boxes according to your preferences. Use tab to apply styles for group boxes, enable/disable native style and define samples.

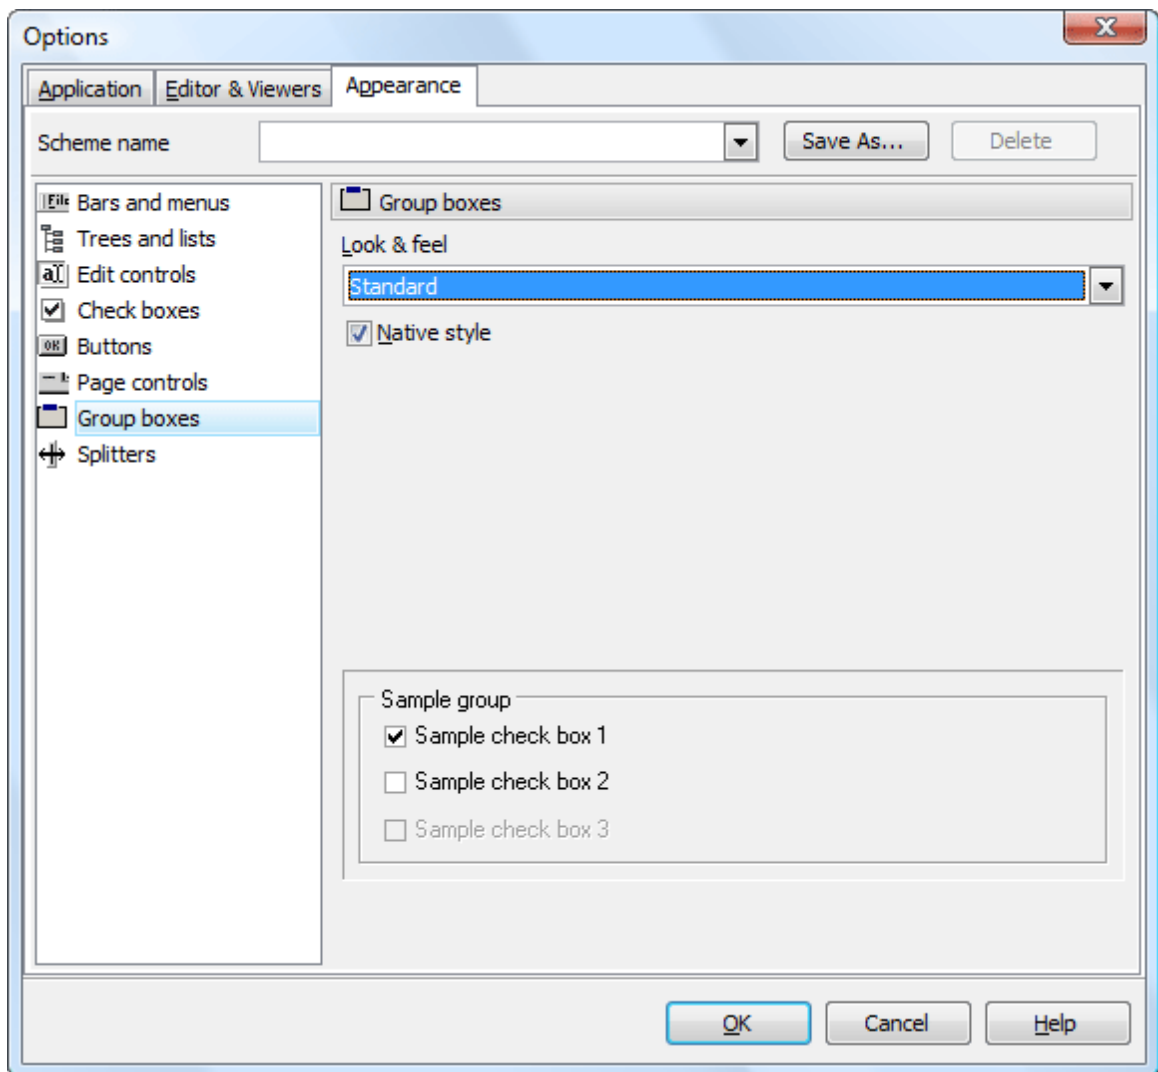

9.3.8 Splitters


Use the [Splitters](#) item to customize all AnySQL Maestro splitters according to your preferences. Use the tab to select hot zone style (*Windows XP task bar*, *Media Player 8*, *Media Player 9*, *Simple* or *none*) and specify the [Hot zone drags a splitter](#) option.

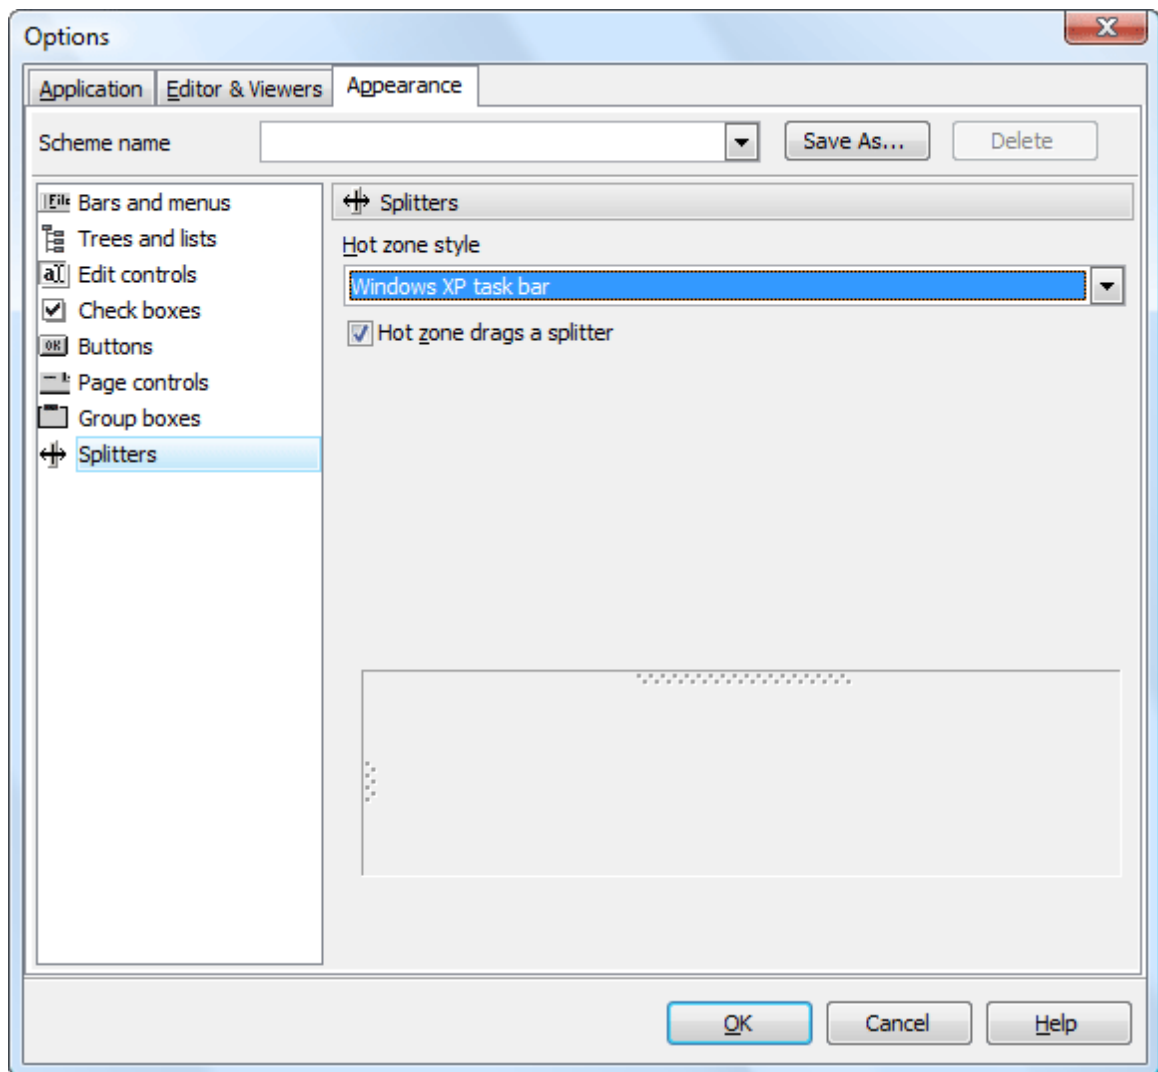

9.4 Export Settings


Export Settings Wizard allows you to export all or partial AnySQL Maestro settings to single *.reg file which can be applied to the application of AnySQL Maestro installed on another machine or used to backup previous settings. To run the wizard, select the Tools | Options main menu item and click Export Settings in the [Options](#)^[174] dialog.

- [Specifying destination file to save settings to](#)^[214]
- [Specifying settings categories to save](#)^[214]
- [Select database profiles to save](#)^[215]
- [Saving settings](#)^[215]

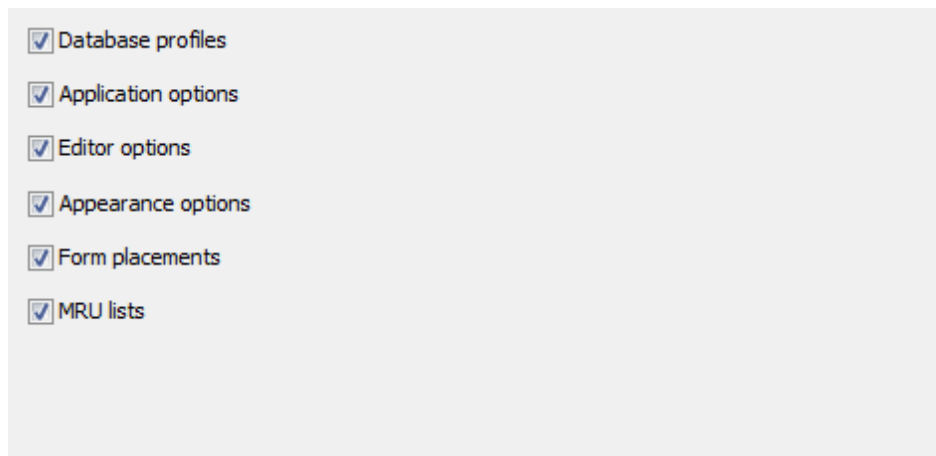


9.4.1 Specifying destination file

Specify a *.reg file to extract AnySQL Maestro setting to.

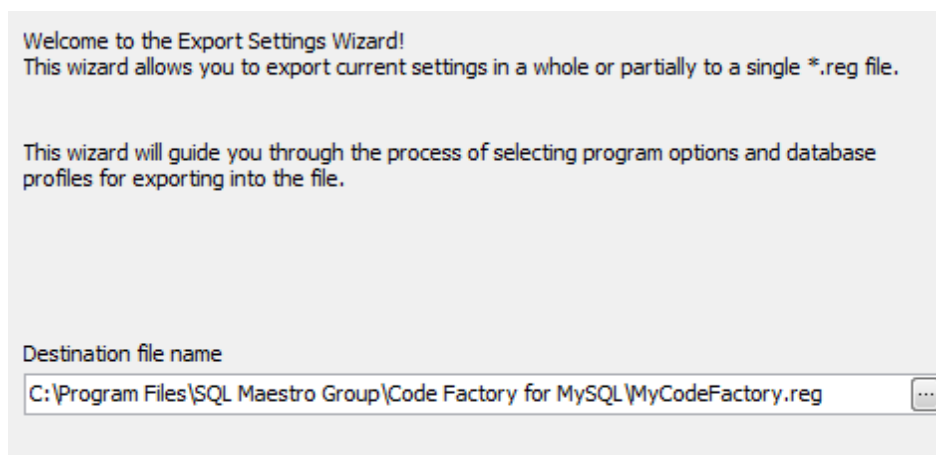


9.4.2 Selecting setting categories

The options of this step specify the information saved to the result file, e.g. Database profiles, [Application options](#)^[175], etc.

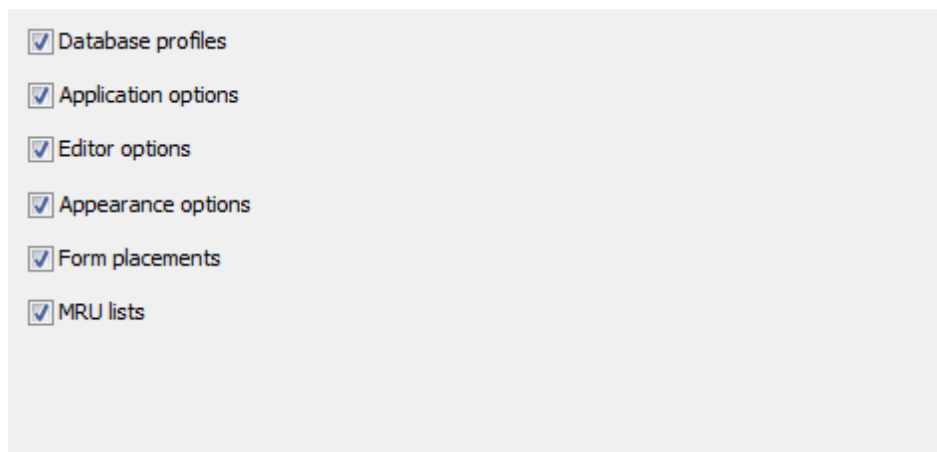

9.4.3 Selecting database profiles

Select database profiles to save their settings by moving them from the [Available Databases](#) list to the [Selected Databases](#) one.

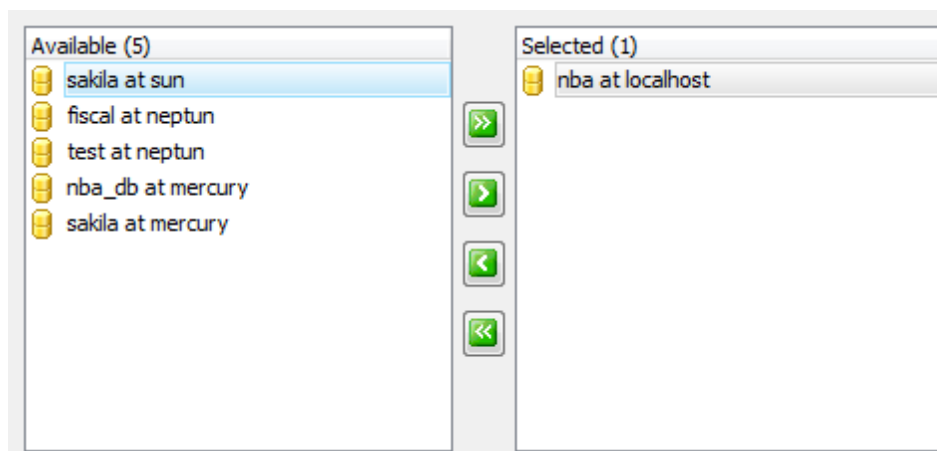

9.4.4 Saving settings

Click the [Ready](#) button to start the extracting. The process log is displayed in the [Export log](#) box.

Export log

The command(s) completed successfully.
Exporting editor options...
The command(s) completed successfully.
Exporting appearance options...
The command(s) completed successfully.
Exporting form placements...
The command(s) completed successfully.
Exporting MRU lists...
The command(s) completed successfully.



Click "Ready" to export settings.

Index

- A -

- AnySQL Maestro 1
 - Getting started 12
 - Installation 4
 - License agreement 6
 - Registration 5
 - System requirements 3
- Appearance Options
 - Bar and menus 205
 - Buttons 209
 - Check boxes 208
 - Edit controls 207
 - Group boxes 211
 - Page controls 210
 - Splitters 212
 - Trees and lists 206

- B -

- BLOB Editor 109
 - Hexadecimal mode 110
 - HTML mode 111
 - Image mode 109
 - Navigating withing the BLOB editor 109
 - PDF mode 112
 - Plain text mode 110
- BLOB Viewer 137
 - Hexadecimal mode 137
 - HTML mode 140
 - Image mode 139
 - PDF mode 141
 - Plain text mode 138

- C -

- Create Database Profiles Wizard 23
 - Setting connection properties 23
 - Setting profile options 23
- Create object wizard - basic principles 34
 - Setting object name 35
 - Viewing common information 36
- Create Schema Wizard 54

- Create Table Wizard 59
- Create updatable views 165
- Create View Wizard 74

- D -

- Data Analysis 147
 - Data 149
 - Query 148
- Data Management 97
 - BLOB editor 109
 - Data View 98
 - Export Data Wizard 114
 - Get SQL Dump Wizard 121
 - Import Data Wizard 124
- Data View
 - Editing data in dialog 105
 - Lookup editor 105
 - Viewing data 98
 - Working with data grid 99
 - Working with info cards 104
- Database Editor 32
- Database Explorer
 - Filtering explorer content 46
- Database Management 21
 - Creating a database profile 23
 - Database editor 32
 - Editing a database profile 25
- Database Object
 - Schemas 53
 - Tables 58
 - Views 73
- Database Objects 52
 - Copy, Paste and Drag-n-Drop features 42
 - Create object wizard 34
 - Creating a database object 34
 - Describing object 38
 - Duplicate Object wizard 39
 - Duplicating a database object 39
 - Duplicating selected object 41
 - Managing database objects 49
 - Object Editor 37
 - Queries 81
 - Viewing database objects 47
- Database Profile Editor 25
 - Connection properties 25
 - Database options 26
 - Default directories 27

| | |
|--|-----|
| Database Profile Editor | 25 |
| Editing obligatory scripts to execute | 28 |
| Setting log options | 29 |
| Statistics | 30 |
| Diagram Viewer | 143 |
| Exporting diagram image | 145 |
| Selecting fields | 144 |
| Duplicate Object Wizard | 39 |
| Modifying new object's definition | 41 |
| Selecting object to duplicate | 40 |
| Selecting source and destination databases | 39 |
| Duplication a database object | 39 |
| Duplicate Object Wizard | 39 |
| Duplicating selected objects | 41 |

- E -

| | |
|---------------------------------|-----|
| Editor & Viewer Options | |
| Code Folding | 203 |
| Code Insight | 202 |
| Display | 198 |
| General | 197 |
| PHP highlight | 201 |
| SQL highlight | 199 |
| XML highlight | 200 |
| EULA | 6 |
| Export Data Wizard | 114 |
| Adjusting data formats | 116 |
| Selecting fields for export | 116 |
| Setting common export options | 120 |
| Setting destination file name | 114 |
| Setting format-specific options | 117 |
| Setting header and footer | 115 |
| Export Settings Wizard | |
| Saving settings | 215 |
| Selecting database profiles | 215 |
| Selecting setting categories | 214 |
| Specifying destination file | 214 |

- F -

| | |
|------------------------|-----|
| Field Editor | 64 |
| Filter Panel | 46 |
| Find Text Dialog | 170 |
| Foreign Key References | 70 |
| Foreign Keys | 68 |

- G -

| | |
|---------------------------------|-----|
| Generate Database Report Wizard | 135 |
| Editing report style | 136 |
| Selecting reporting elements | 135 |
| Setting report paths | 135 |
| Get SQL Dump Wizard | 121 |
| Selecting fields | 121 |
| Specifying dump options | 122 |
| Getting Started | 12 |
| Explaining user interface | 15 |
| First time started | 16 |
| Switching between windows | 19 |
| Working with databases | 13 |

- I -

| | |
|-------------------------------|-----|
| Import Data Wizard | 124 |
| Customizing common options | 130 |
| Data Format | 129 |
| Map builder | 128 |
| Setting fields correspondence | 127 |
| Setting source file name | 125 |
| Indexes | 66 |
| Installation instructions | 4 |

- L -

| | |
|-------------------|---|
| License Agreement | 6 |
|-------------------|---|

- O -

| | |
|--------------------------------------|----|
| Object Browser | 47 |
| Object editor - basic principles | 37 |
| SQL definition | 37 |
| Object Management | 33 |
| Copy, Paste and Drag-n-Drop features | 42 |
| Creating a database object | 34 |
| Describing object | 38 |
| Duplicating a database object | 39 |
| Managing objects | 49 |
| Managing Queries | 81 |
| Managing tables | 58 |
| Managing views | 73 |
| Schemas | 53 |
| Viewing objects | 47 |

- Object Management 33
 - Wizards and Editors 37
- Object Manager 49
- Options 174
 - Appearance 205
 - Application 175
 - Application confirmations 176
 - Application preferences 175
 - BLOB Viewer 185
 - Data Grid 190
 - Designer 187
 - Editor & Viewers 197
 - Editors 188
 - Explorer 180
 - Export 186
 - Export Settings 214
 - Object Manager 181
 - Query Builder 183
 - SQL Editor 181
 - SQL Script Editor 182
 - Tools 178

- P -

- Purchase AnySQL Maestro 5

- Q -

- Queries 81
 - Query Parameters 87
 - SQL Editor 83
 - Visual Query Builder 88
- Query Parameters 87

- R -

- Registration 5
- Replace Text Dialog 171
- Report Designer 152
 - Object Inspector 156
 - Toolbox 154

- S -

- Schema Designer 159
 - Navigation bar 161
 - Toolbox 161

- Schema Editor 56
- Schemas 53
 - Create Schema Wizard 54
 - Schema editor 56
- Server Objects
 - Copy, Paste and Drag-n-Drop features 42
 - Create object wizard 34
 - Describing object 38
 - Object Editor 37
- Split table 166
- SQL Editor 83
 - Executing query 85
- SQL Script Editor 133
- System requirements 3

- T -

- Tabbed MDI 15
- Table Editor 60
 - Editing table properties 60
 - Master-detail data view 61
 - Viewing table data 61
- Tables 58
 - Create Table Wizard 59
 - Fields 64
 - Foreign key references 70
 - Foreign keys 68
 - Indexes 66
 - Table editor 60
- Tools 131
 - BLOB Viewer 137
 - Data Analysis 147
 - Database Designer 159
 - Diagram Viewer 143
 - Dialogs 170
 - Generate Database Report Wizard 135
 - Report Designer 152
 - Schema Designer 159
 - Script Runner 132
 - SQL Generator 164
 - SQL Script Editor 133

- U -

- User interface 15

- V -

- View Editor 78
 - Editing view properties 79
 - Viewing data 80
- Views 73
 - Create View Wizard 74
 - View Editor 78
- Visual Query Builder 88
 - Executing a query 95
 - Working with editor area 94

- W -

- WHERE condition 74
- Window List 19
- Wizards and Editors 37
 - Create object wizard - basic principles 34
 - Object Editor 37